
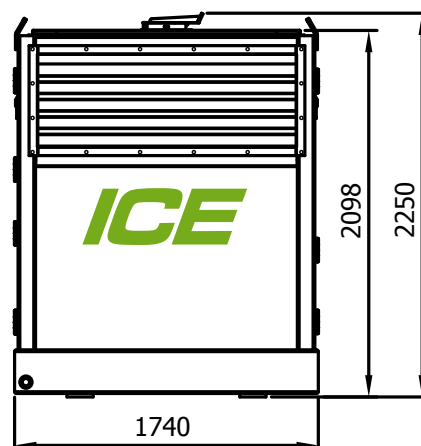
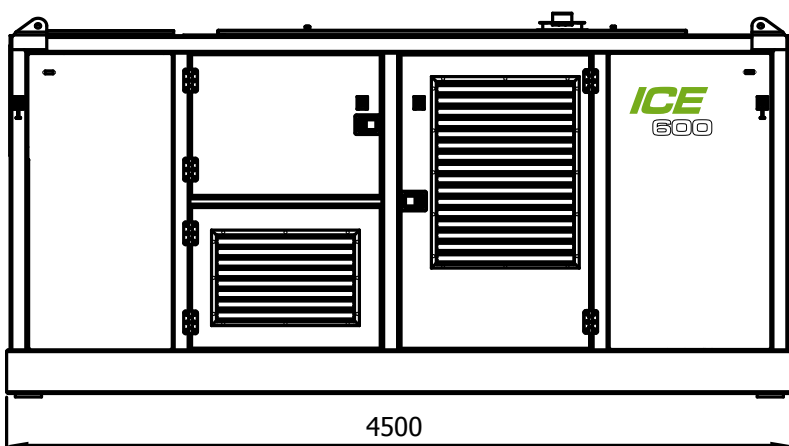


Specification Sheet ICE 600 STAGE IIIA / Tier3 Hydraulic Power Unit

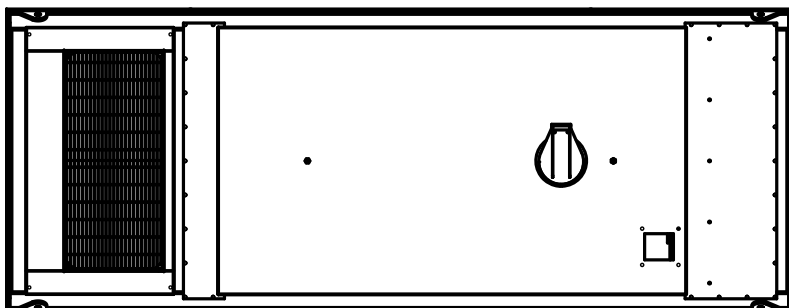

Specifications	600	
Diesel engine	Caterpillar C15	
Max. theoretical power	403/540	kW/HP
Max. frequency	2100	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	670	L/min
Diesel oil	650	L
DEF (AdBlue) capacity	-	L
Hydraulic oil	1200	L
Weight without fuel	7050	kg
Weight filled up	7600	kg

Specification Sheet

ICE 600 STAGE IIIA / Tier3

Hydraulic Power Unit

Technische Daten: 600

Dieselmotor	Caterpillar C15	
Max. theoretische Leistung	403/540	kW/HP
Max. Drehzahl	2100	upm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	670	L/min
Diesel Öl	650	L
DAF (AdBlue) kapazität	-	L
Hydraulische Öl	1200	L
Gewicht ohne Diesel Öl	7050	kg
Gewicht betankt	7600	kg

Spécifications: 600

Moteur diesel	Caterpillar C15	
Puissance théorique max.	403/540	kW/HP
Max. fréquence	2100	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	670	L/min
Huile diesel	650	L
Capacité FED (AdBlue)	-	L
Huile hydraulique	1200	L
Poids sans huile diesel	7050	kg
Poids rempli	7600	kg

Specificaties: 600

Diesel motor	Caterpillar C15	
Max. theoretische vermogen	403/540	kW/HP
Max. toerental	2100	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	670	L/min
Diesel olie	650	L
DEF (AdBlue) capaciteit	-	L
Hydraulische olie	1200	L
Gewicht zonder diesel	7050	kg
Gewicht volgetankt	7600	kg

Specificatii: 600

Motor diesel	Caterpillar C15	
Putere max. teoretica	403/540	kW/HP
Frecventa max.	2100	rpm
Presión máxima de trabajo	350	bar
Pompa hidraulica	Parker	
Debit max. de ulei	670	L/min
Ulei Diesel	650	L
Capacitate DEF (AdBlue)	-	L
Ulei hidraulic	1200	L
Greutate fara ulei	7050	kg
Greutate umpluta	7600	kg