




# Specification Sheet

## PVE 800 Stage - / Tier 2

### Hydraulic Power Unit

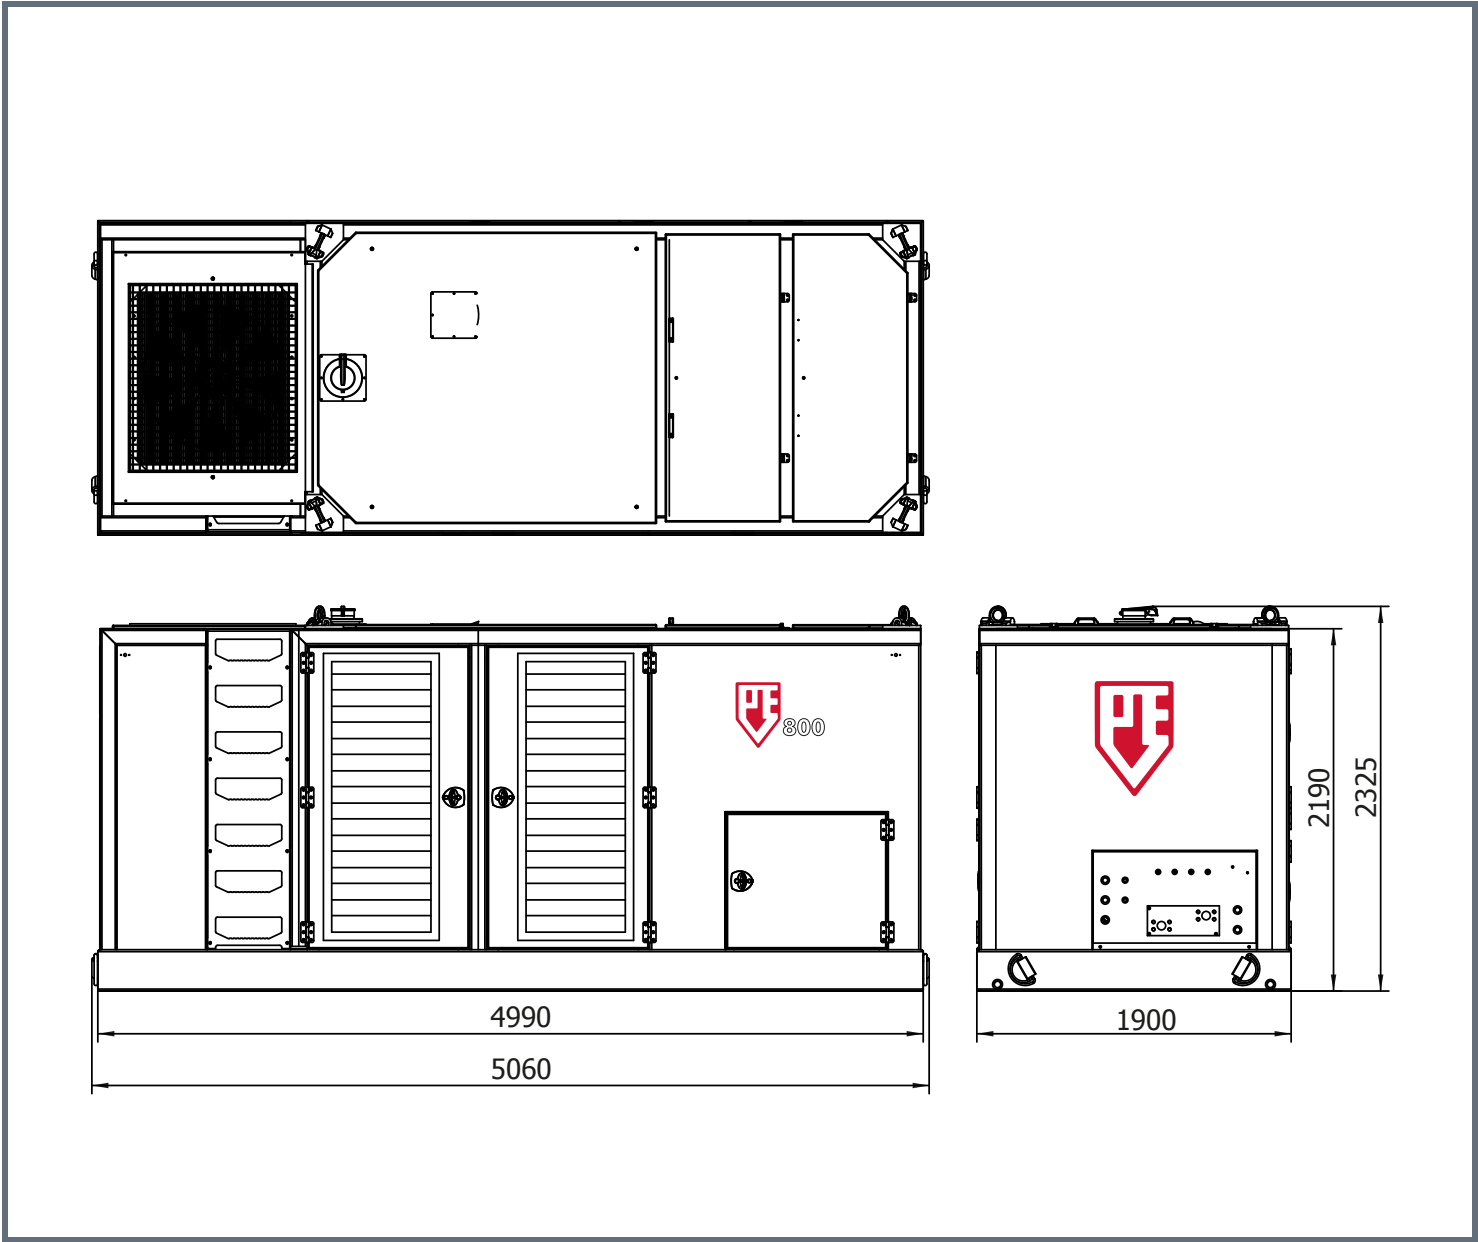

Specifications	800	
Diesel engine	Volvo TAD 1643 VE-B	
Max. theoretical power	565/768	kW/HP
Max. frequency	1900	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	810	L/min
Diesel oil	1045	L
DEF (AdBlue) capacity	-	L
Hydraulic oil	2200	L
Weight without fuel	9050	kg
Weight filled up	9500	kg



# Specification Sheet

## PVE 800 Stage - / Tier 2

### Hydraulic Power Unit

<b>Technische Daten:</b>		<b>800</b>
Dieselmotor	Volvo TAD 1643 VE-B	
Max. theoretische Leistung	565/768	kW/HP
Max. Drehzahl	1900	upm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	810	L/min
Diesel Öl	1045	L
DAF (AdBlue) kapazität	-	L
Hydraulische Öl	2200	L
Gewicht ohne Diesel Öl	9050	kg
Gewicht betankt	9500	kg

<b>Spécifications:</b>		<b>800</b>
Moteur diesel	Volvo TAD 1643 VE-B	
Puissance théorique max.	565/768	kW/HP
Max. fréquence	1900	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	810	L/min
Huile diesel	1045	L
Capacité FED (AdBlue)	-	L
Huile hydraulique	2200	L
Poids sans huile diesel	9050	kg
Poids rempli	9500	kg

<b>Specificaties:</b>		<b>800</b>
Diesel motor	Volvo TAD 1643 VE-B	
Max. theoretische	565/768	kW/HP
Max. toerental	1850	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	810	L/min
Diesel olie	1045	L
DEF (AdBlue) capaciteit	-	L
Hydraulische olie	2200	L
Gewicht zonder diesel	9050	kg
Gewicht volgetankt	9500	kg

<b>Specificatii:</b>		<b>800</b>
Motor diesel	Volvo TAD 1643 VE-B	
Putere max. teoretica	565/768	kW/HP
Frecventa max.	1900	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit max. de ulei	810	L/min
Ulei Diesel	1045	L
Capacitate DEF (AdBlue)	-	L
Ulei hidraulic	2200	L
Greutate fara ulei	9050	kg
Greutate umpluta	9500	kg