


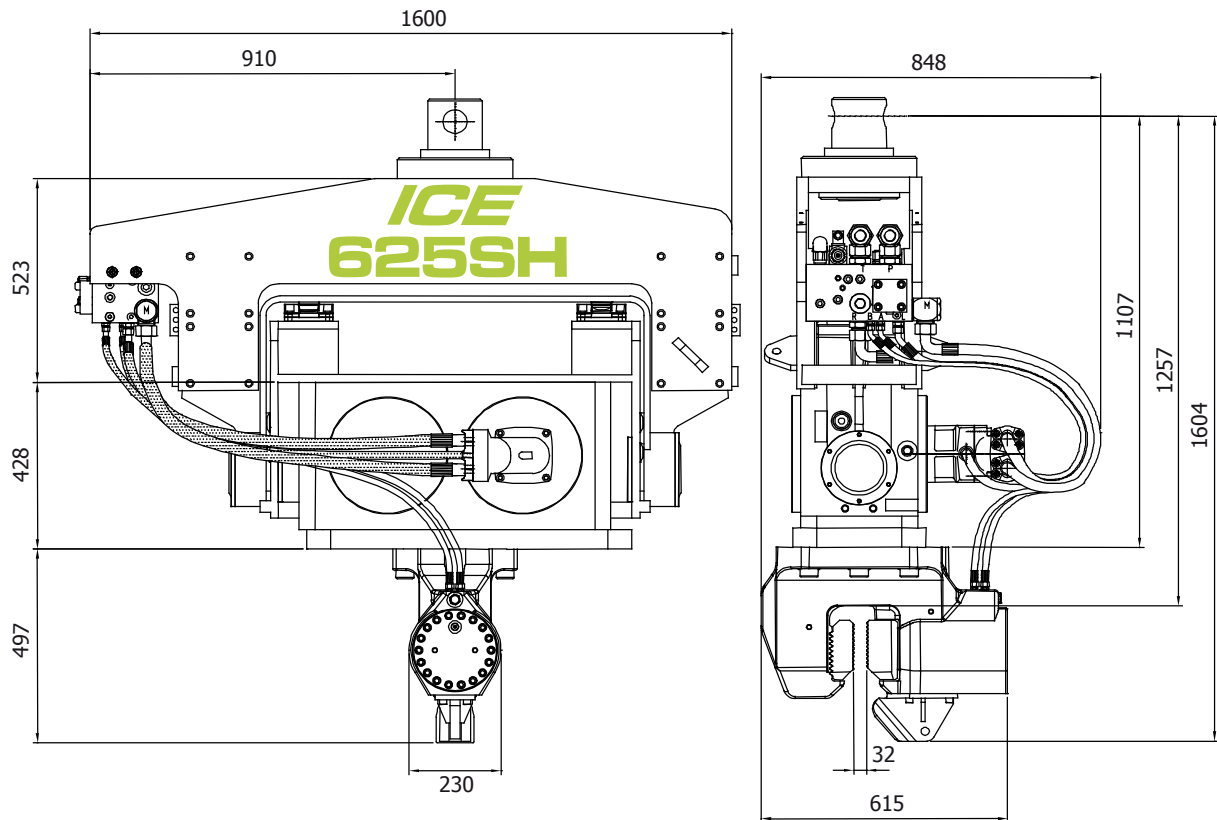

Specifications

625SH

Eccentric moment	6	kgm	Clamps:	
Max. centrifugal force	410	kN	Sheet pile clamp	60TU
Max. frequency	2500	rpm	Transport weight per piece	250 kg
Max. amplitude excluding 60TU	17.7	mm		
Max. amplitude including 60TU	12.9	mm		
Max. static line-pull	120	kN		
Max hydraulic power	117/159	kW/HP		
Max. operating pressure	350	bar		
Max. oil flow	201	l/min		
Forced lubrication	no			
Dynamic weight excluding 60TU	680	kg		
Dynamic weight including 60TU	930	kg		
Total weight including 60TU	1480	kg		

Technische Daten:		625SH		
Statisches Moment	6	kgm	Klemmzange:	
Max. Fliehkraft	410	kN	Spundwandklemmzange	60TU
Max. Drehzahl	2500	UPM	Transportgewicht pro Stück	250 kg
Max. Amplitude ohne 60TU	17.7	mm		
Max. Amplitude mit 60TU	12.9	mm		
Max. Statische Zugkraft	120	kN		
Max. hydraulische Leistung	117/159	kW/PS		
Max. Betriebsdruck	350	Bar		
Max. Fördermenge	201	l/min		
Zwangsschmierung	nein			
Dyn. Gewicht ohne 60TU	680	kg		
Dyn. Gewicht mit 60TU	930	kg		
Gesamtgewicht mit 60TU	1480	kg		

Spécifications:		625SH			
Moment excentrique	6	kgm	Pincés:		
Max. force centrifuge	410	kN	Pince palplanche	60TU	
Max. fréquence	2500	t/min	Poids de transport par pièce	250	kg
Max. amplitude sans 60TU	17.7	mm			
Max. amplitude avec 60TU	12.9	mm			
Force de traction statique	120	kN			
Puissance hydraulique max.	117/159	kW/ch			
Pression de travail max.	350	bar			
Débit d'huile max.	201	l/min			
Huile lubrifiante	non				
Poids dynamique sans 60TU	680	kg			
Poids dynamique avec 60TU	930	kg			
Poids total avec 60TU	1480	kg			

Specificaties:		625SH	
Excentrisch moment	6	kgm	Klemmen:
Max. centrifugaalkracht	410	kN	Damwandklem
Max. toerental	2500	tpm	Transportgewicht per klem
Max. amplitude excl. 60TU	17.7	mm	250
Max. amplitude incl. 60TU	12.9	mm	kg
Max. statische trekkracht	120	kN	
Max. hydraulisch vermogen	117/159	kW/PK	
Max. werkdruk	350	bar	
Max. oliedoorstrooming	201	l/min	
Geforceerde smering	nee		
Dyn. gewicht excl. 60TU	680	kg	
Dyn. gewicht incl. 60TU	930	kg	
Totaalgewicht incl. 60TU	1480	kg	

Specificatii:		625SH	
Moment excentric	6	kgm	Menghina:
Fora centrifuga maxima	410	kN	Menghina pentru palplanse
Frecventa maxima	2500	rpm	Greutatea transportului pe buc.
Amplitudinea maxima excluzand 60TU	17.7	mm	25
Amplitudinea maxima inclusiv 60TU	12.9	mm	kg
Tractiune statica maxima	120	kN	
Putere hidraulica maxima	117/159	kW/HP	
Presiunea maxima de lucru	350	bar	
Debit maxim de ulei	201	l/min	
Ungere fortata	nu		
Greutate dinamica excluzand 60TU	680	kg	
Greutate dinamica inclusiv 60TU	930	kg	
Greutate totala inclusiv 60TU	1480	kg	