




Specification sheet

PVE 12VM

Vibro Hammer


English

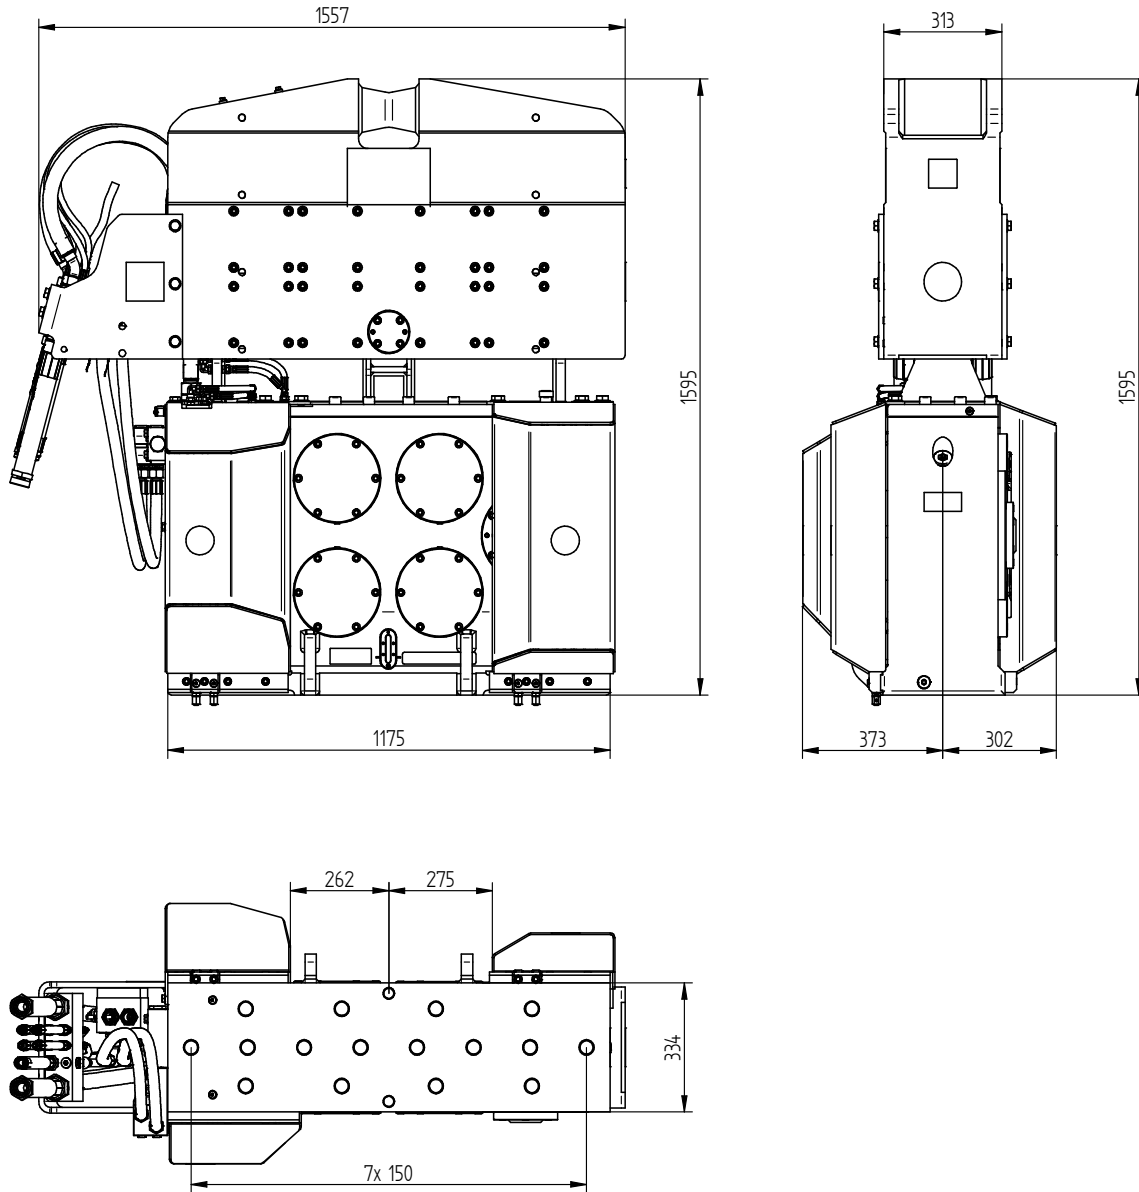


Specifications :

PVE 12VM

Eccentric moment	12 kgm	Clamps:	
Max. centrifugal force	700 kN	Sheet pile clamp	DWK 85T
Max. frequency	2300 rpm	Transport weight per piece	600 kg
Max. amplitude excl. DWK 85T	17 mm	Double clamps	PPK 55T
Max. amplitude incl. DWK 85T	11.7 mm	Transport weight per piece	310 kg
Max. static line-pull	250 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	261 l/min	Model	300 series
Forced lubrication	yes		
Dynamic weight excl. DWK 85T	1450 kg	Hose set:	
Dynamic weight incl. DWK 85T	2050 kg	Length	30 m
Total weight excl. DWK 85T & hoses	2396 kg	Transport weight (±)	465 kg

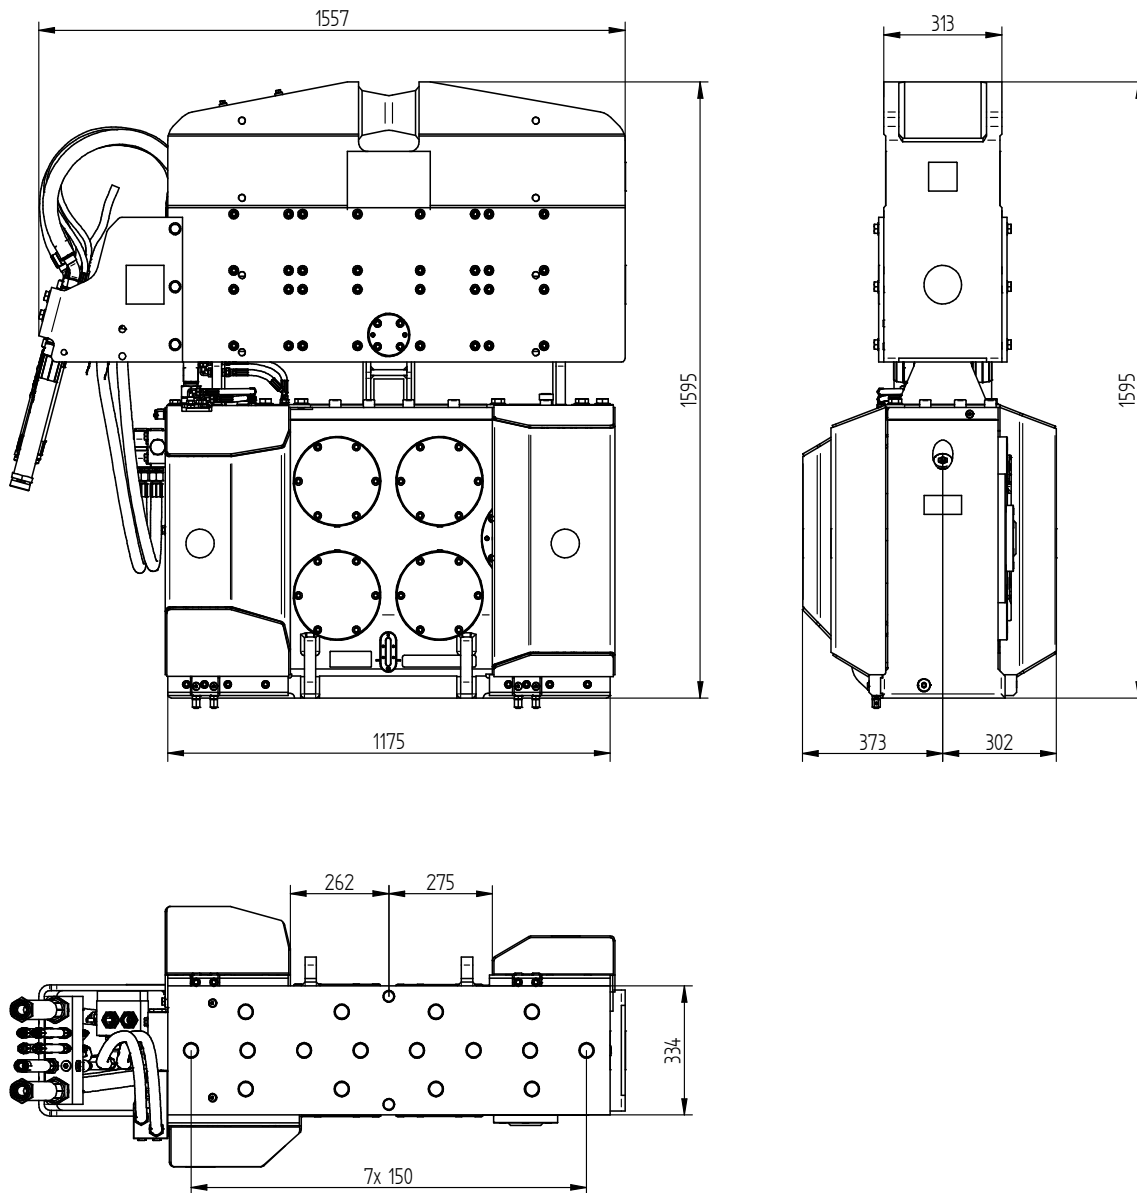
Technische Daten :
PVE 12VM


Statisches Moment	12 kgm	Klemmzange:	
Max. Fliehkraft	700 kN	Universalzange	DWK 85T
Max. Drehzahl	2300 rpm	Transportgew. pro Stück	600 kg
Max. Amplitude ohne 100TU	17 mm	Rohrklemmzange	PPK 55T
Max. Amplitude mit 100TU	11.7 mm	Transportgew. pro Stück	310 kg
Max. Statische Zugkraft	250 kN		
Max. Betriebsdruck	350 bar	Aggregat:	
Max. Fördermenge	261 l/min	Modell	300 series
Zwangsschmierung	ja		
Dyn. Gewicht ohne 100TU	1450 kg	Schlauchsatz:	
Dyn. Gewicht mit 100TU	2050 kg	Länge	30 m
Gesamtgew. ohne 100TU & Schläuche	2396 kg	Transportgewicht (±)	465 kg

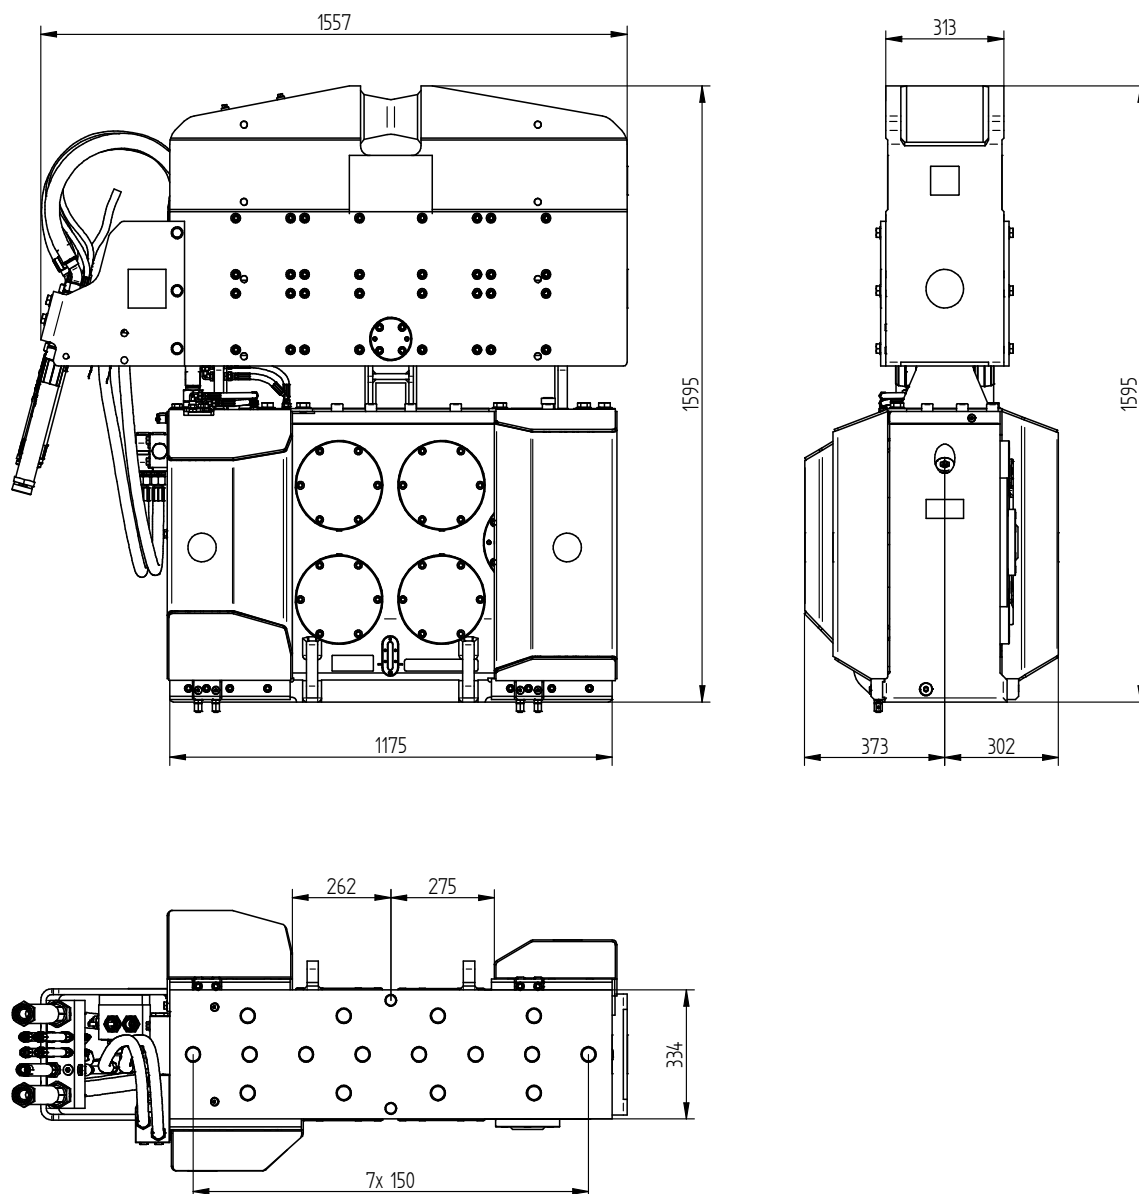

Spécifications

PVE 12VM

Moment excentrique	12 kgm	Pinces:	
Max. force centrifuge	700 kN	Pince palplanche	DWK 85T
Max. fréquence	2300 rpm	Poids de transport par pièce	600 kg
Max. amplitude sans 100TU	17 mm	Pince tube	PPK 55T
Max. amplitude avec 100TU	11.7 mm	Poids de transport par pièce	310 kg
Force de traction statique	250 kN		
Pression de travail max.	350 bar	Groupe hydraulique:	
Débit d'huile max.	261 l/min	Modèle	300 series
Huile lubrifiante	oui		
Poids dynamique sans 100TU	1450 kg	Jeu de tuyau:	
Poids dynamique avec 100TU	2050 kg	Longueur	30 m
Poids total sans 100TU & tuyaux	2396 kg	Poids de transport (±)	465 kg

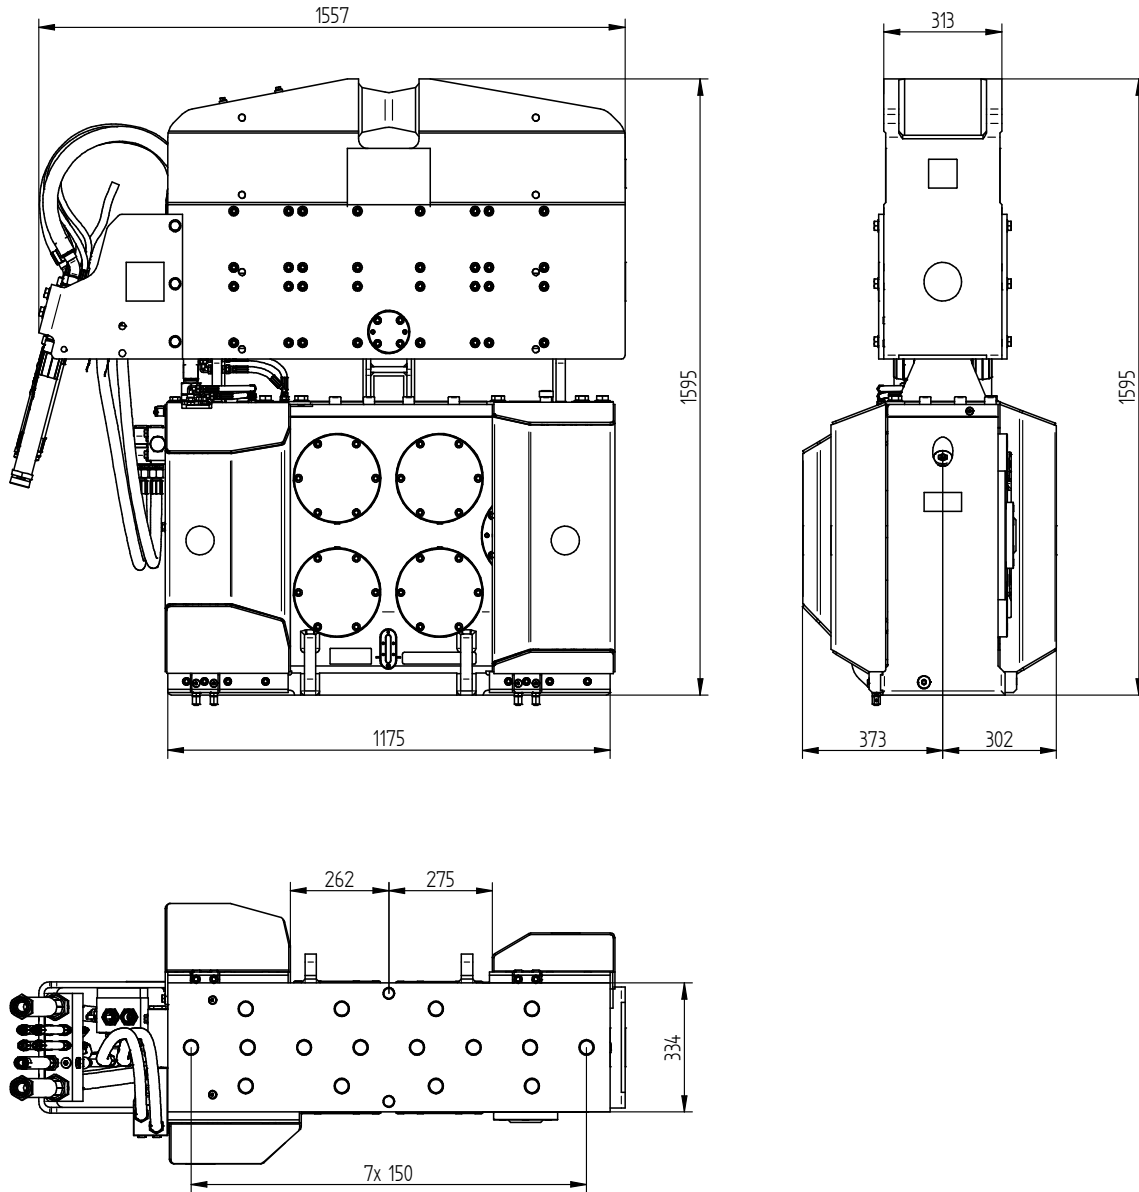

Specificaties

PVE 12VM

Excentrisch moment	12 kgm	Klemmen:	
Max. centrifugaalkracht	700 kN	Damwandklem	DWK 85T
Max. toerental	2300 rpm	Transportgewicht per klem	600 kg
Max. amplitude excl. 100TU	17 mm	Pijpenklem	PPK 55T
Max. amplitude incl. 100TU	11.7 mm	Transportgewicht per klem	310 kg
Max. statische trekkracht	250 kN		
Max. werkdruk	350 bar	Aggregaat:	
Max. oliedoorstroming	261 l/min	Model	300 series
Geforceerde smering	ja		
Dynamisch gewicht excl. 100TU	1450 kg	Slangenset:	
Dynamisch gewicht incl. 100TU	2050 kg	Lengte	30 m
Totaalgewicht excl. 100TU & slangen	2396 kg	Transportgewicht (±)	465 kg




Specifications

PVE 12VM

Vibro Hammer

USA

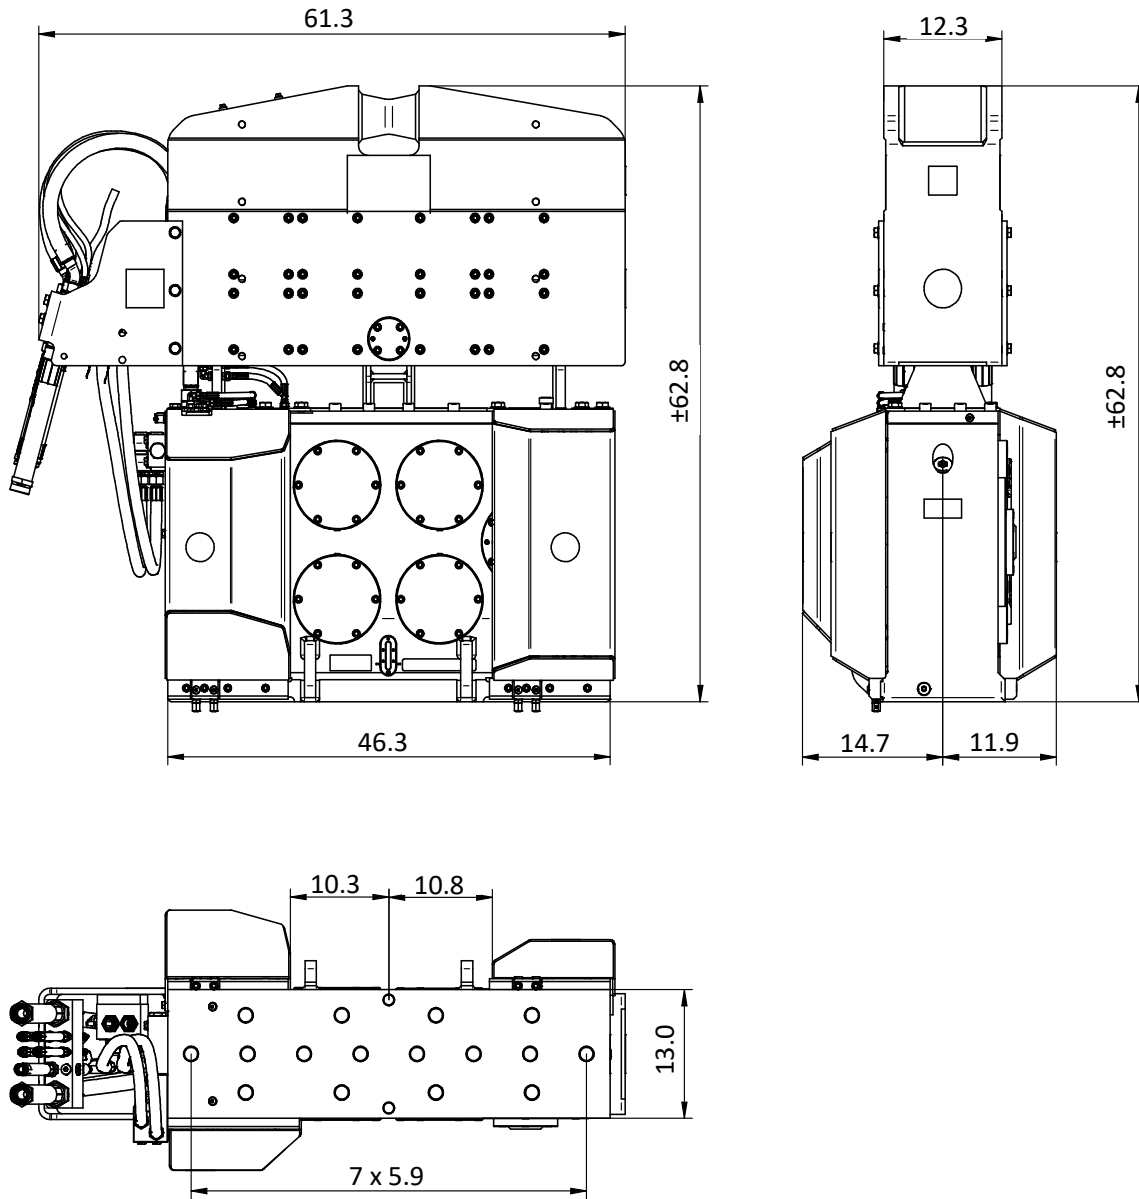

Specifications

PVE 12VM

Eccentric moment	0-1041.7 lbs in	Clamps:	
Max. centrifugal force	0-78.7 US tn	Sheet pile clamp	DWK 85T
Max. frequency	2300 rpm	Transport weight per piece	1323 lbs
Max. amplitude excluding 100TU	0.67 in	Double clamps	PPK 55T
Max. amplitude including 100TU	0.46 in	Transport weight per piece	683 lbs
Max. static line-pull	25.5 US tn		
Max. operating pressure	5076 psi	Powerpack:	
Max. oil flow	69 gal/min	Model	300 series
Forced lubrication	yes		
Dynamic weight excluding 100TU	3197 lbs	Hose set:	
Dynamic weight including 100TU	4519 lbs	Length	98.42519685 ft
Total weight excluding 100TU & hoses	5282 lbs	Transport weight (±)	1025.149519 lbs