



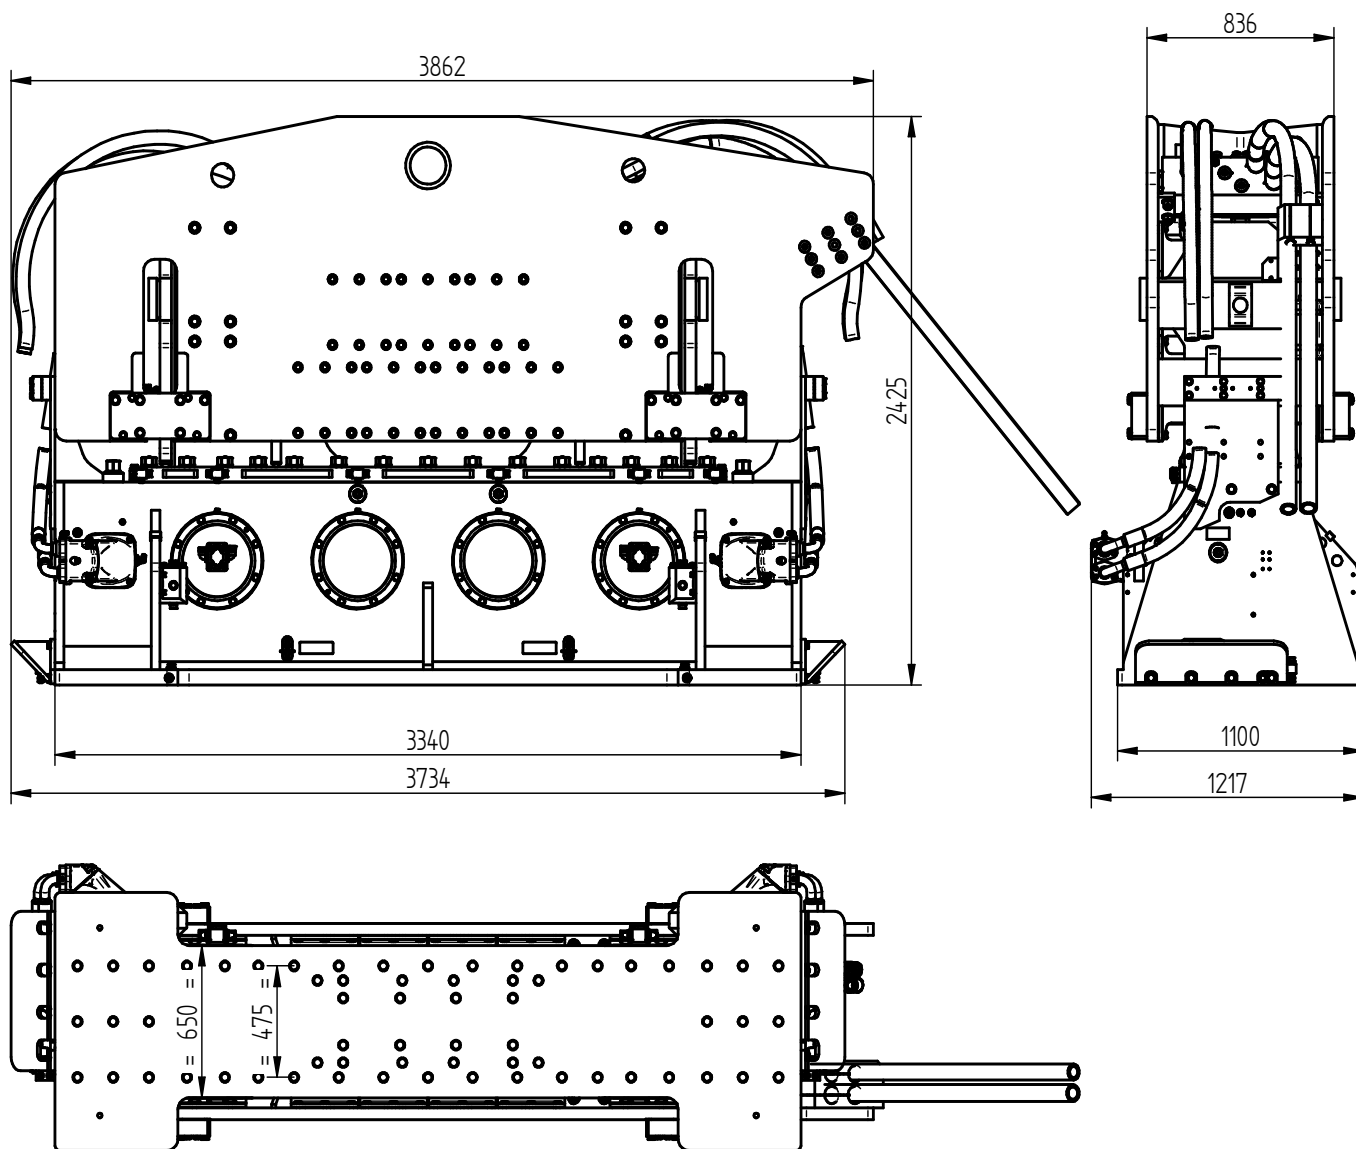

Specifications :

ICE 130NF


Eccentric moment	130 kgm	Clamps:	
Max. centrifugal force	2794 kN	Sheet pile clamp	DWK 350T
Max. frequency	1400 rpm	Transport weight per piece	2600 kg
Max. amplitude excl. DWK 350T	25 mm	Double clamps	PPK 175T
Max. amplitude incl. DWK 350T	22 mm	Transport weight per piece	1300 kg
Max. static line-pull	1260 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	1293 l/min	Model	1400 series
Forced lubrication	yes		
Dynamic weight excl. DWK 350T	10420 kg	Hose set:	
Dynamic weight incl. DWK 350T	13020 kg	Length	60 m
Total weight excl. DWK 350T & hoses	16900 kg	Transport weight (±)	1640 kg

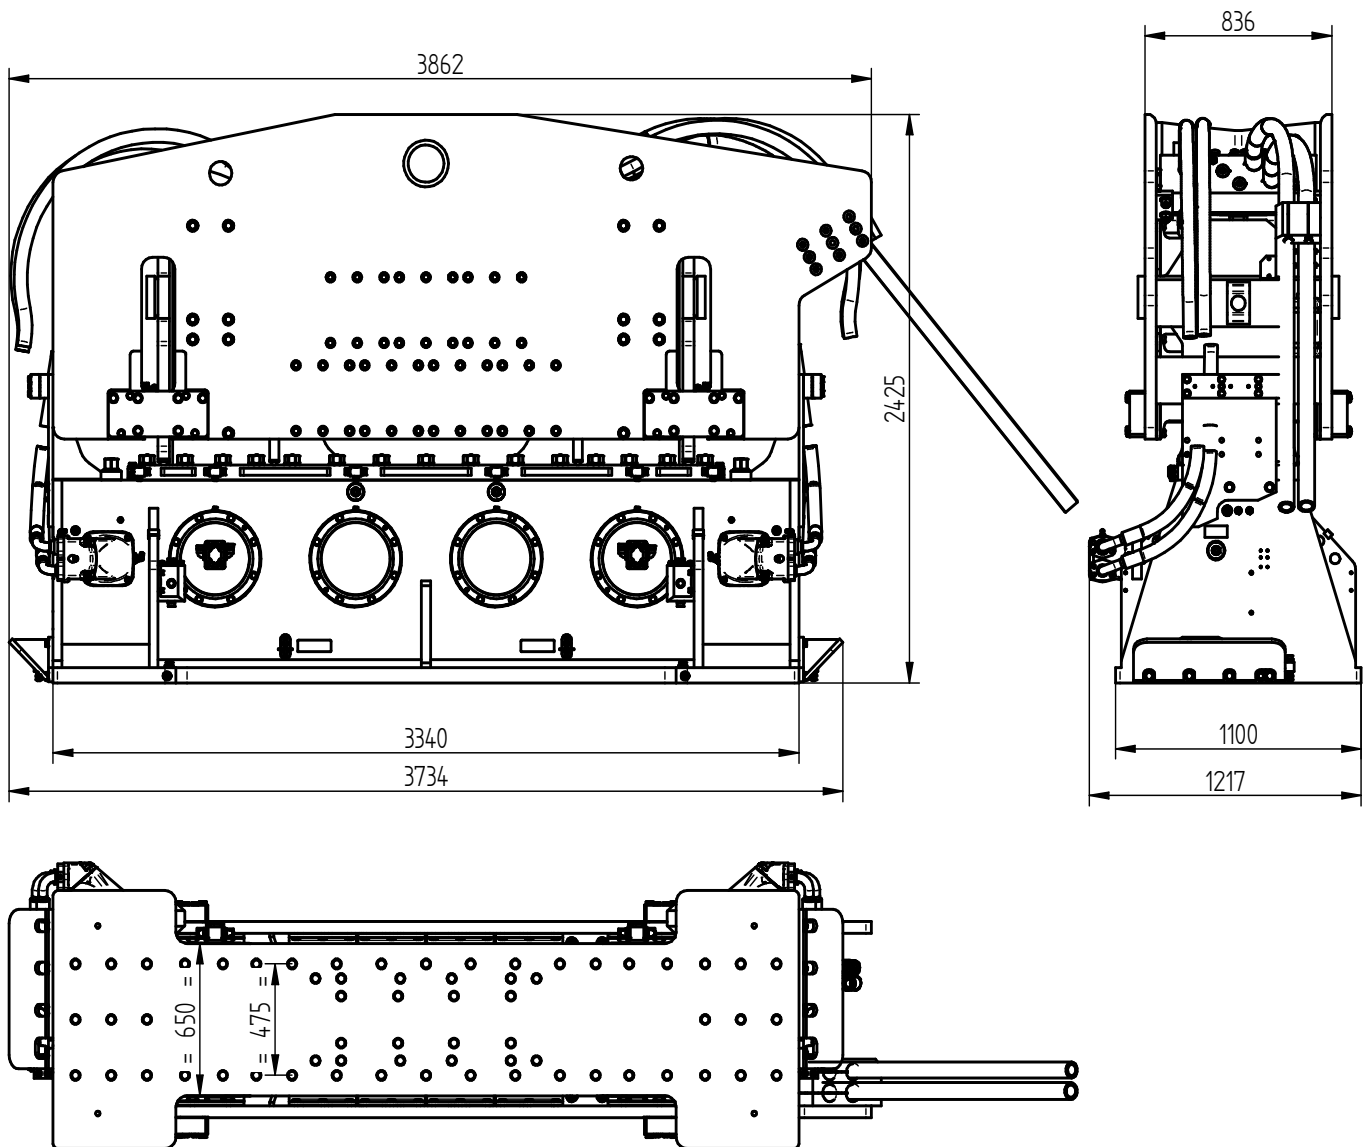

Technische Daten :

ICE 130NF


Statisches Moment	130 kgm	Klemmzange:	
Max. Fliehkraft	2794 kN	Universalzange	DWK 350T
Max. Drehzahl	1400 rpm	Transportgew. pro Stück	2600 kg
Max. Amplitude ohne DWK 350T	25 mm	Rohrklemmzange	PPK 175T
Max. Amplitude mit DWK 350T	22 mm	Transportgew. pro Stück	1300 kg
Max. Statische Zugkraft	1260 kN		
Max. Betriebsdruck	350 bar	Aggregat:	
Max. Fördermenge	1293 l/min	Modell	1400 series
Zwangsschmierung	ja		
Dyn. Gewicht ohne DWK 350T	10420 kg	Schlauchsatz:	
Dyn. Gewicht mit DWK 350T	13020 kg	Länge	60 m
Gesamtgew. Ohne DWK 350T & Schläuche	16900 kg	Transportgewicht (±)	1640 kg

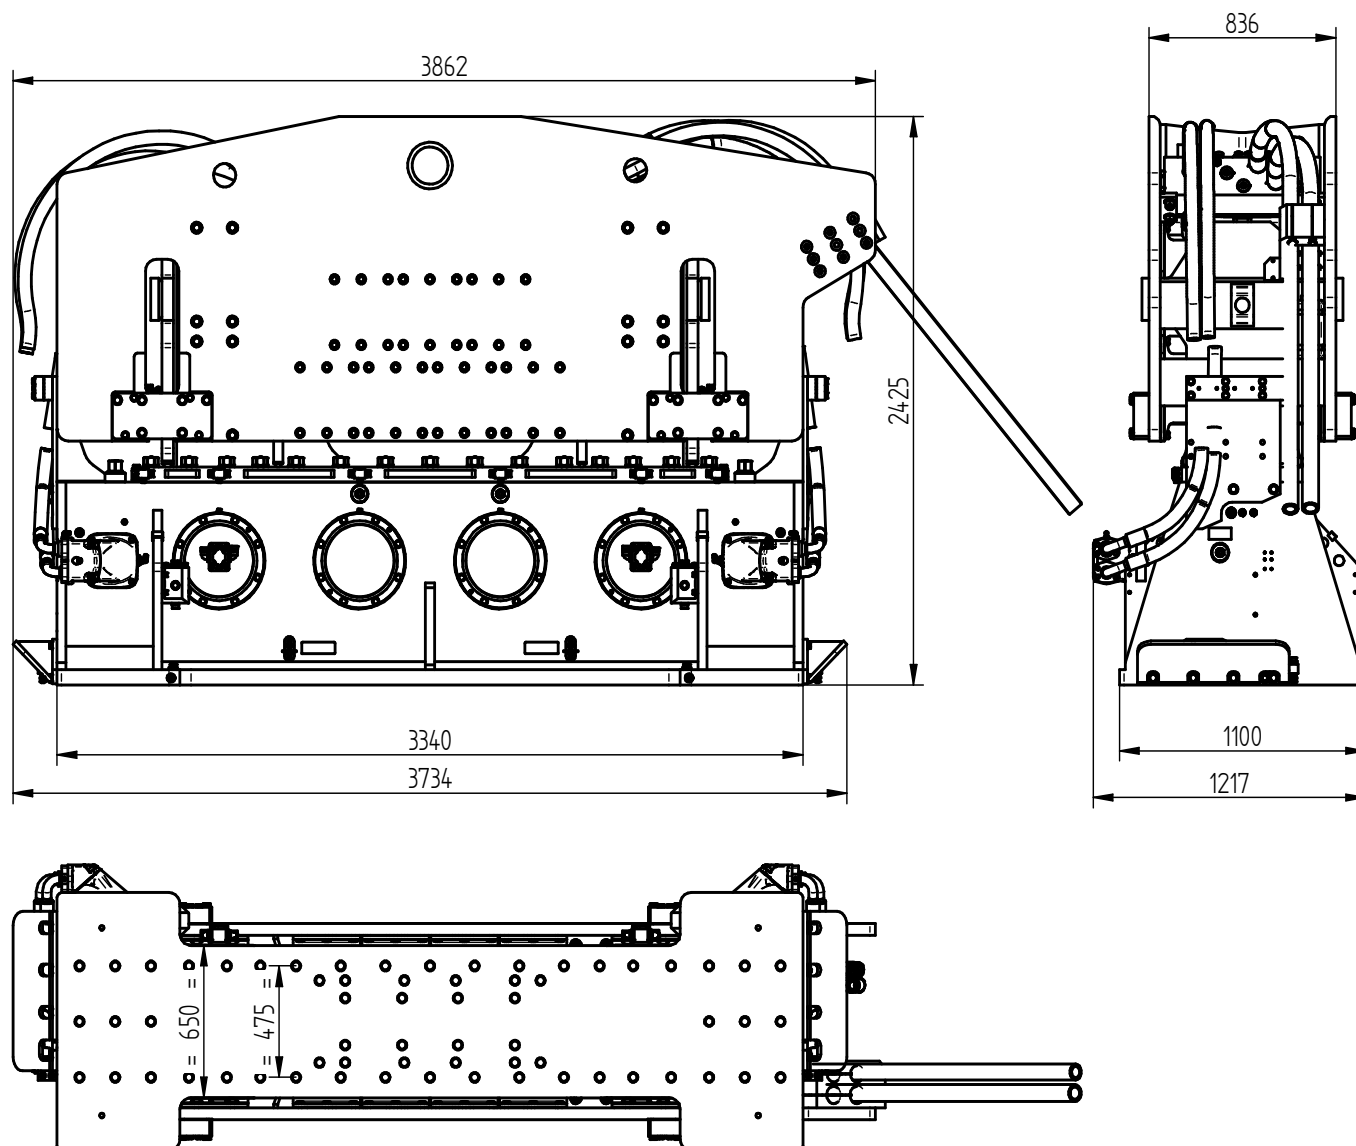


Spécifications

ICE 130NF


Moment excentrique	130 kgm	Pincés:	
Max. force centrifuge	2794 kN	Pince palplanche	DWK 350T
Max. fréquence	1400 rpm	Poids de transport par pièce	2600 kg
Max. amplitude sans DWK 350T	25 mm	Pince tube	PPK 175T
Max. amplitude avec DWK 350T	22 mm	Poids de transport par pièce	1300 kg
Force de traction statique	1260 kN	Groupe hydraulique:	
Pression de travail max.	350 bar	Modèle	1400 series
Débit d'huile max.	1293 l/min	Jeu de tuyau:	
Huile lubrifiante	oui	Longueur	60 m
Poids dynamique sans DWK 350T	10420 kg	Poids de transport (±)	1640 kg
Poids dynamique avec DWK 350T	13020 kg		
Poids total sans DWK 350T & tuyaux	16900 kg		

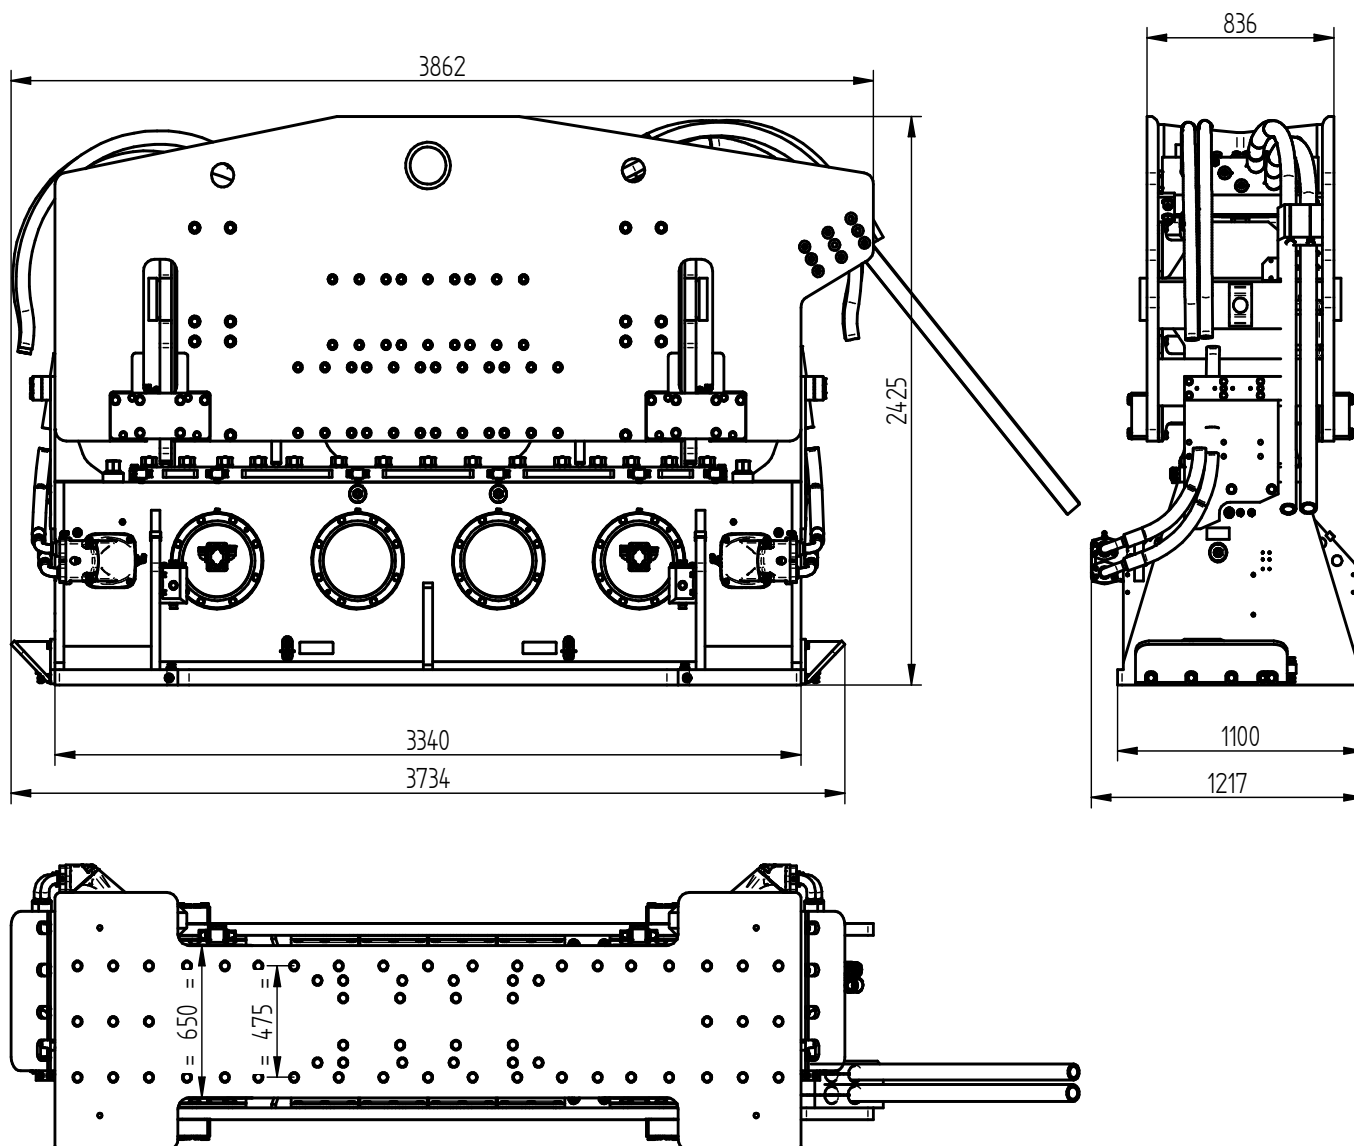
Specificaties
ICE 130NF

Excentrisch moment	130 kgm	Klemmen:	
Max. centrifugaalkracht	2794 kN	Damwandklem	DWK 350T
Max. toerental	1400 rpm	Transportgewicht per klem	2600 kg
Max. amplitude excl. DWK 350T	25 mm	Pijpenklem	PPK 175T
Max. amplitude incl. DWK 350T	22 mm	Transportgewicht per klem	1300 kg
Max. statische trekkracht	1260 kN		
Max. werkdruk	350 bar	Aggregaat:	
Max. oliedoorstroming	1293 l/min	Model	1400 series
Geforceerde smering	ja		
Dynamisch gewicht excl. DWK 350T	10420 kg	Slangenset:	
Dynamisch gewicht incl. DWK 350T	13020 kg	Lengte	60 m
Totaalgewicht excl. DWK 350T & slangen	16900 kg	Transportgewicht (±)	1640 kg

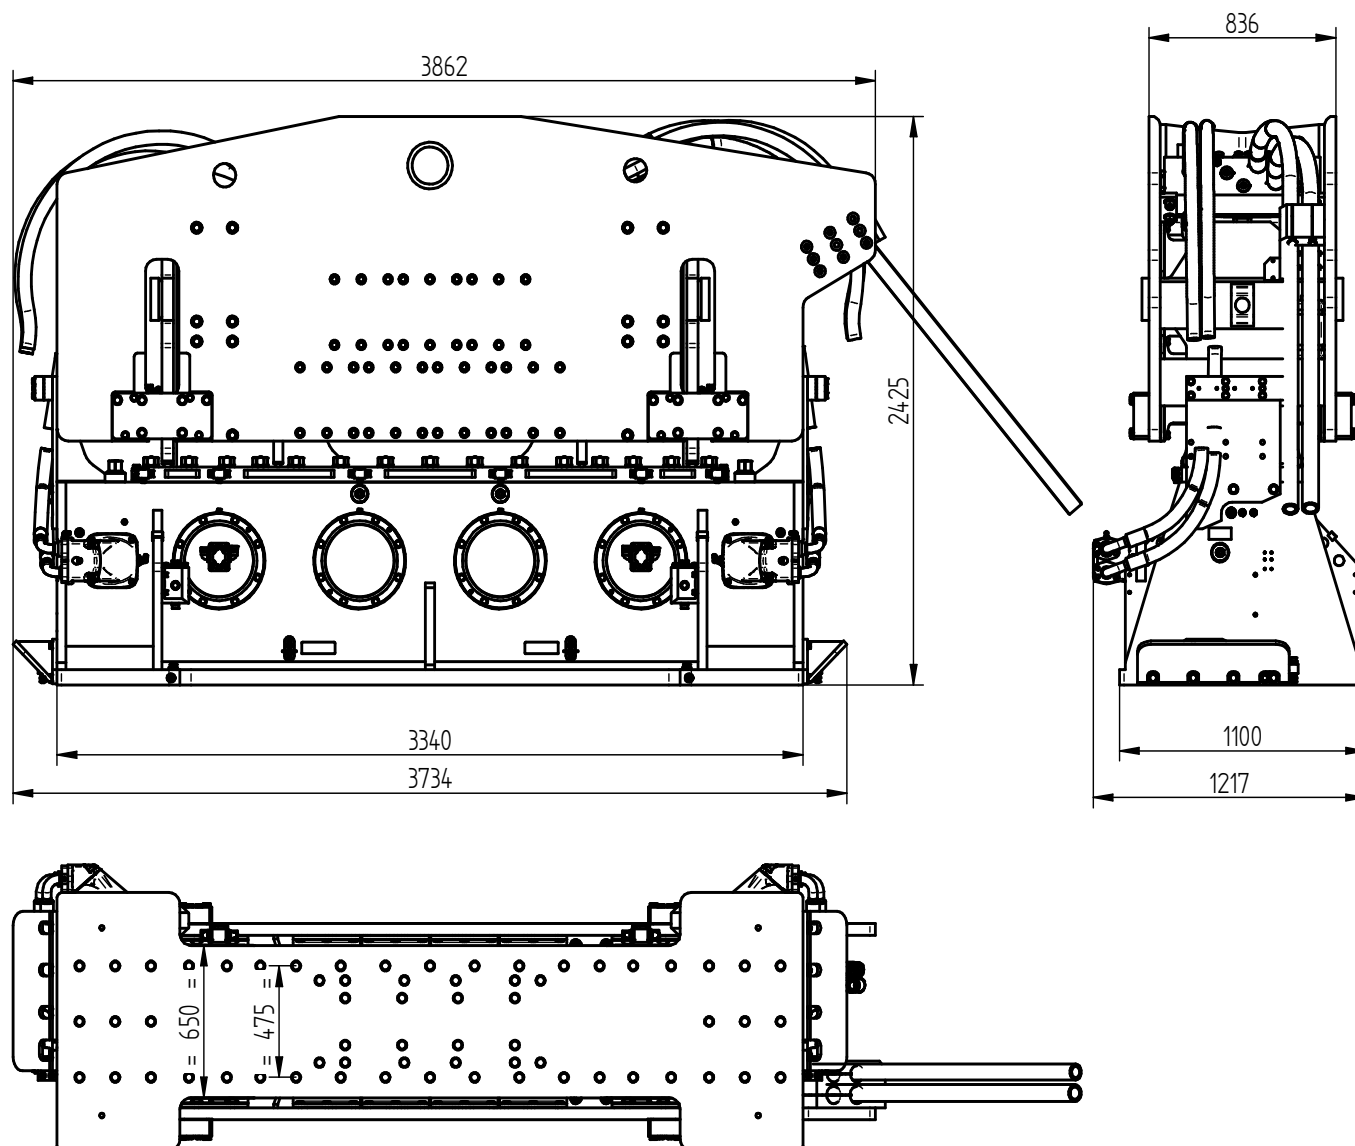
Specificatii
ICE 130NF

Moment excentric	130 kgm	Menghina:	
Forta centrifuga maxima	2794 kN	Menghina pentru palplanse	DWK 350T
Frecventa maxima	1400 rpm	Greutatea transportului pe buc.	2600 kg
Amplitudinea maxima excluzand DWK 350T	25 mm	Menghina dubla	PPK 175T
Amplitudinea maxima inclusiv DWK 350T	22 mm	Greutatea transportului pe buc.	1300 kg
Tractiune statica maxima	1260 kN	Unitate de putere:	
Presiunea maxima de lucru	350 bar	Model	1400 series
Debit maxim de ulei	1293 l/min	Conjunto de manguera:	
Ungere fortata	da	Lungime	60 m
Greutate dinamica excluzand DWK 350T	10420 kg	Greutatea transportului (+)	1640 kg
Greutate dinamica inclusiv DWK 350T	13020 kg		
Greutate totala excl. DWK 350T & furtunuri	16900 kg		

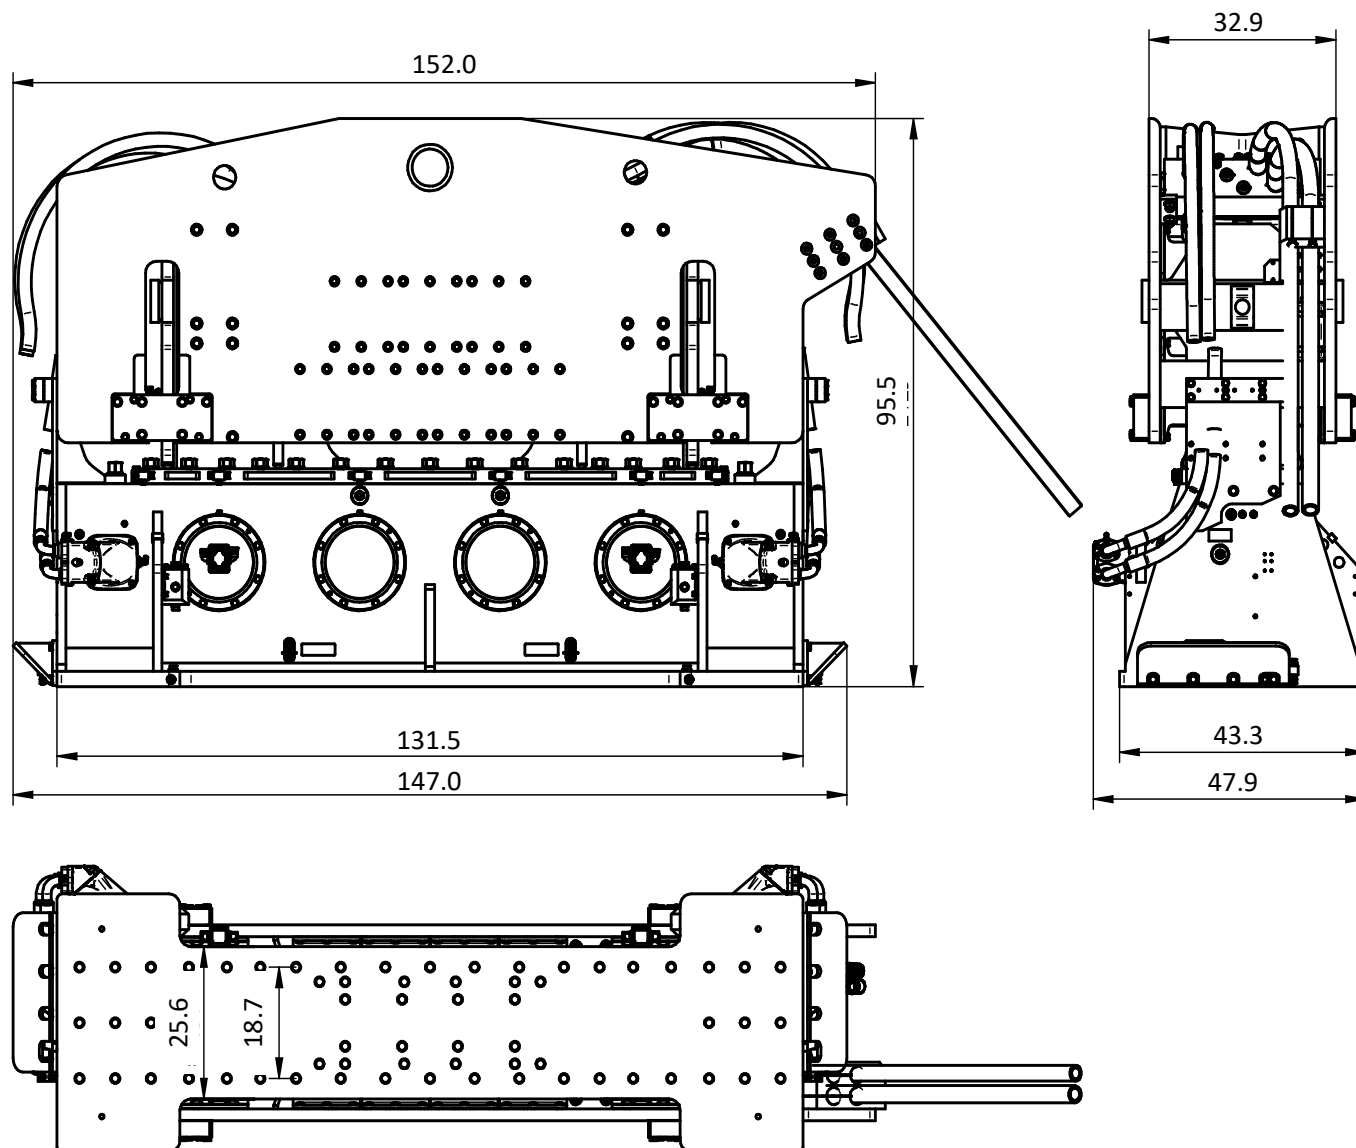

Specifications

ICE 130NF

Eccentric moment	0-11284.7 lbs in	Clamps:	
Max. centrifugal force	0-314.1 US tn	Sheet pile clamp	DWK 350T
Max. frequency	1400 rpm	Transport weight per piece	5732 lbs
Max. amplitude excluding DWK 350T	0.98 in	Double clamps	PPK 175T
Max. amplitude including DWK 350T	0.87 in	Transport weight per piece	2866 lbs
Max. static line-pull	128.5 US tn		
Max. operating pressure	5076 psi	Powerpack:	
Max. oil flow	342 gal/min	Model	1400 series
Forced lubrication	yes		
Dynamic weight excluding DWK 350T	22972 lbs	Hose set:	
Dynamic weight including DWK 350T	28704 lbs	Length	197 ft
Total weight excluding DWK 350T & hoses	37258 lbs	Transport weight (±)	3616 lbs