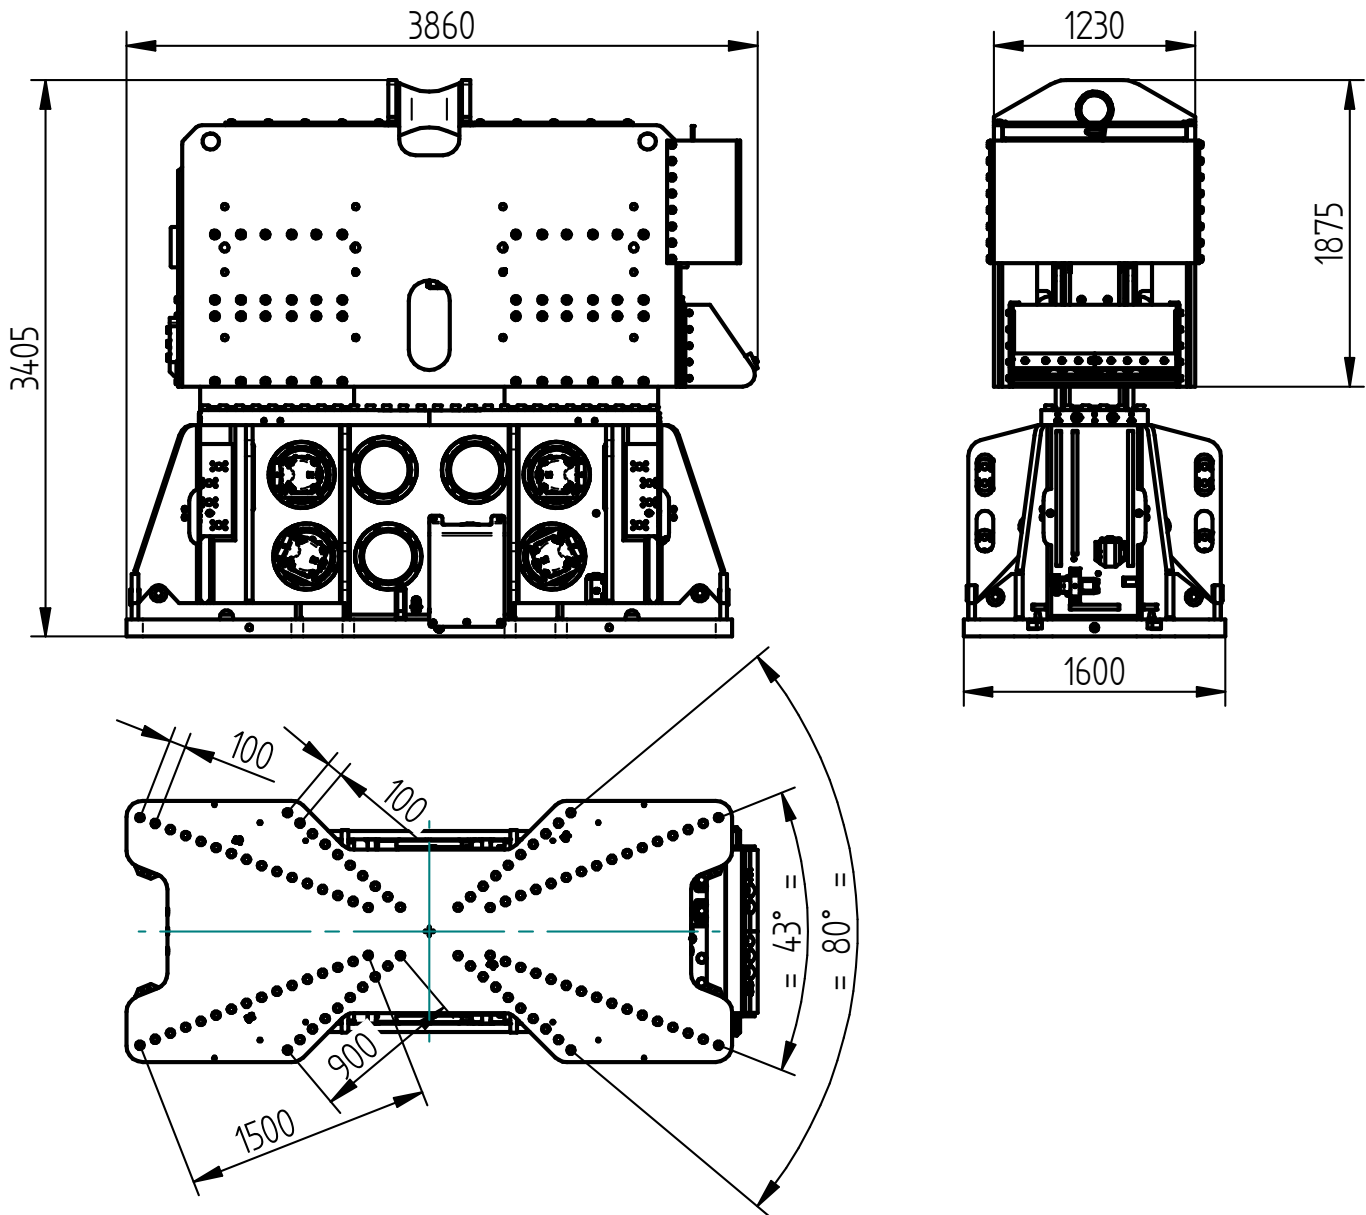
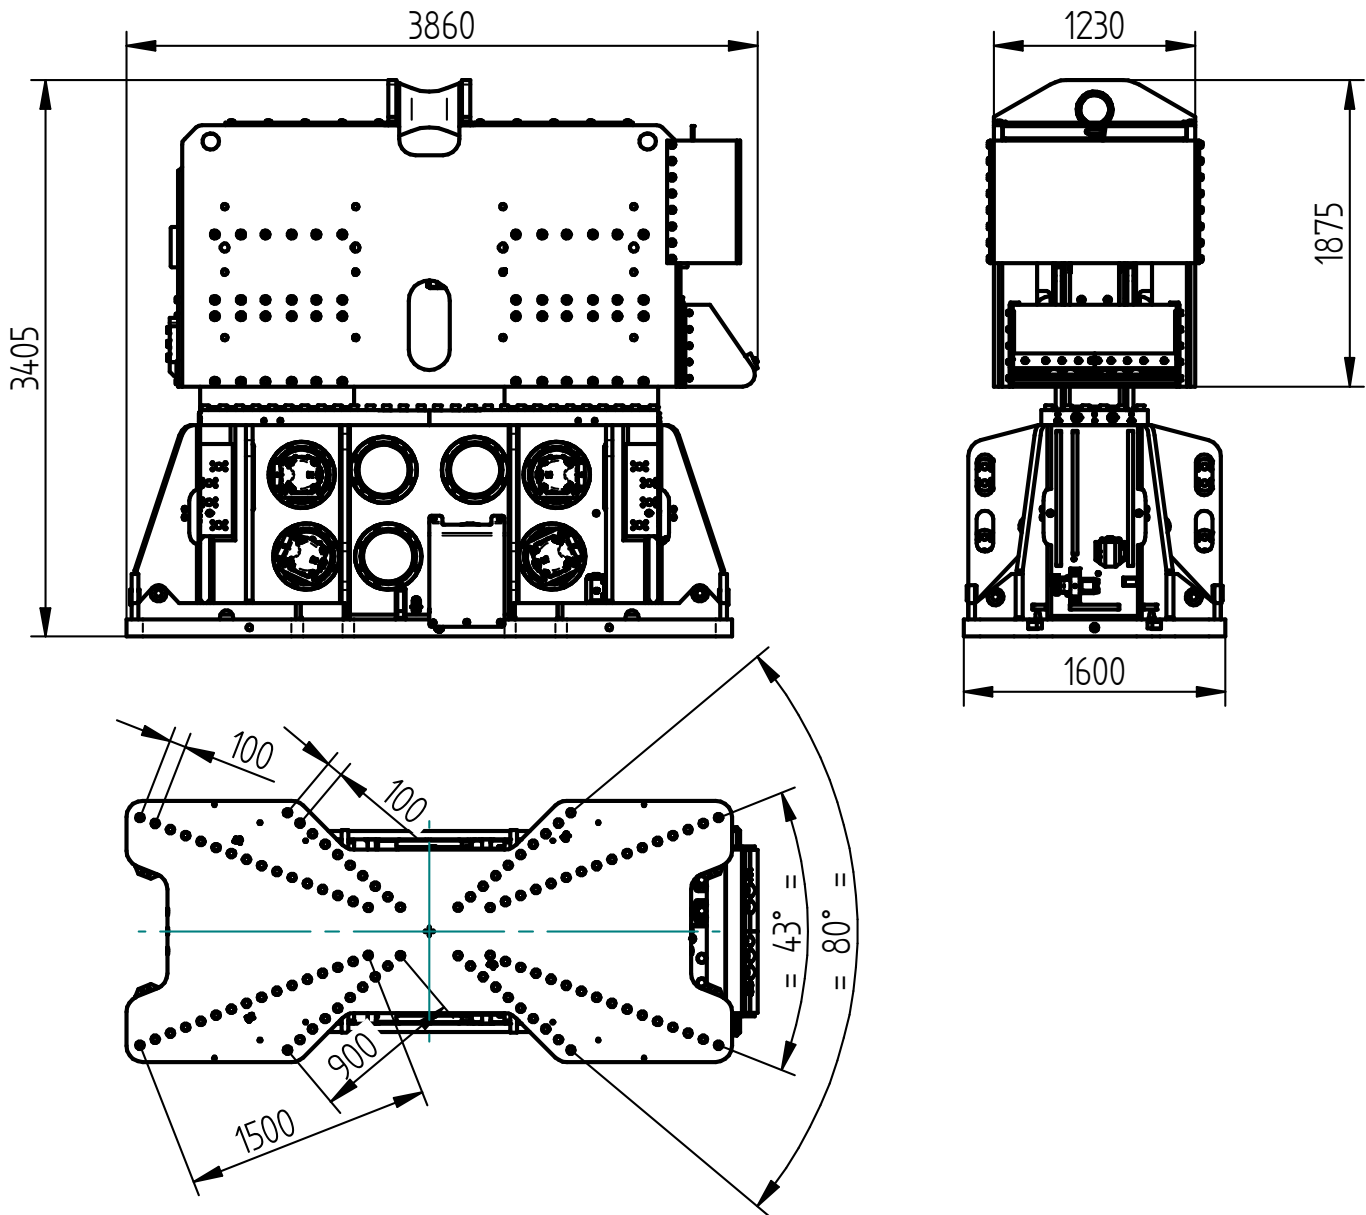
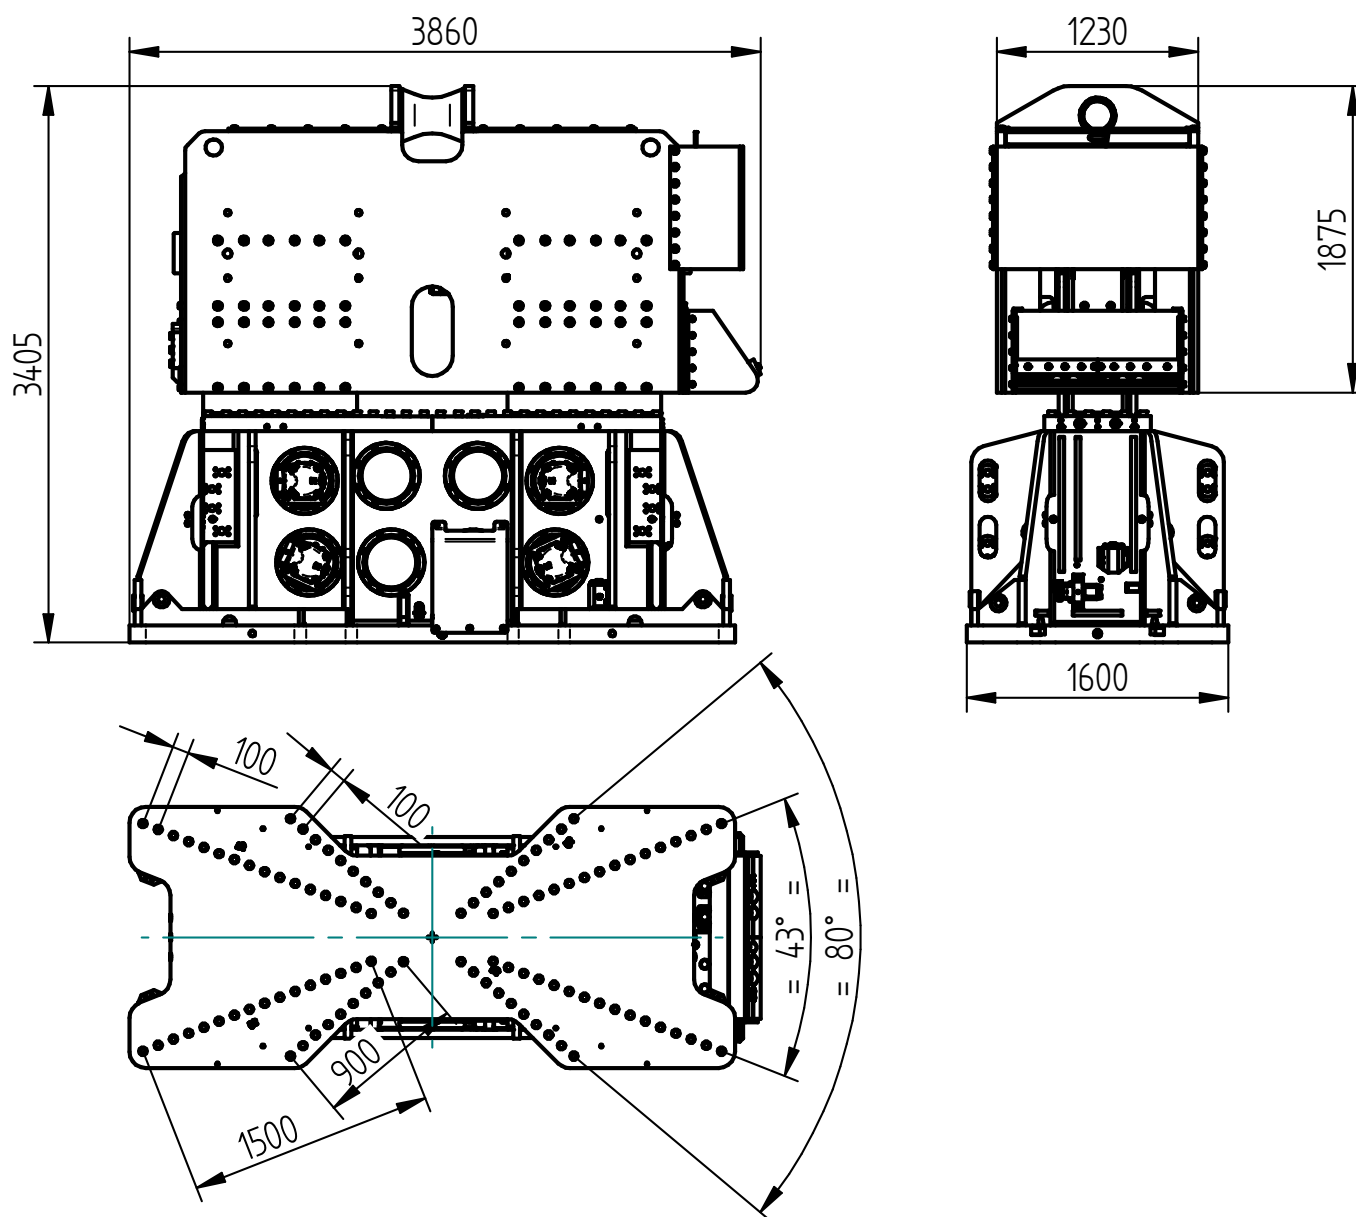


**Specifications :****PVE 200M**


Eccentric moment	200 kgm	Clamps:	
Max. centrifugal force	4300 kN	Double clamps	PPK 150T (4x)
Max. frequency	1400 rpm	Transport weight per piece	1300 kg
Max. amplitude excluding PPK 150T (4x)	19 mm		
Max. amplitude including PPK 150T (4x)	15.3 mm		
Max. static line-pull	1800 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	1680 l/min	Model	1600 series
Forced lubrication	yes		
Dynamic weight excluding PPK 150T (4x)	21000 kg	Hose set:	
Dynamic weight including PPK 150T (4x)	26200 kg	Length	60 m
Total weight excluding PPK 150T (4x) & hoses	29000 kg	Transport weight (±)	3050 kg

**Technische Daten :****PVE 200M**


Statisches Moment	200 kgm	Klemmzange:	
Max. Fliehkraft	4300 kN	Rohrklemmzange	PPK 150T (4x)
Max. Drehzahl	1400 rpm	Transportgew. pro Stück	1300 kg
Max. Amplitude ohne PPK 150T (4x)	19 mm		
Max. Amplitude mit PPK 150T (4x)	15.3 mm		
Max. Statische Zugkraft	1800 kN		
Max. Betriebsdruck	350 bar	Aggregat:	
Max. Fördermenge	1680 l/min	Modell	1600 series
Zwangsschmierung	ja		
Dyn. Gewicht ohne PPK 150T (4x)	21000 kg	Schlauchsatz:	
Dyn. Gewicht mit PPK 150T (4x)	26200 kg	Länge	60 m
Gesamtgew. ohne PPK 150T (4x) & Schläuche	29000 kg	Transportgewicht (±)	3050 kg

**Spécifications****PVE 200M**

Moment excentrique	200 kgm	Pincés:	
Max. force centrifuge	4300 kN	Pince tube	PPK 150T (4x)
Max. fréquence	1400 rpm	Poids de transport par pièce	1300 kg
Max. amplitude sans PPK 150T (4x)	19 mm		
Max. amplitude avec PPK 150T (4x)	15.3 mm		
Force de traction statique	1800 kN		
Pression de travail max.	350 bar	Groupe hydraulique:	
Débit d'huile max.	1680 l/min	Modèle	1600 series
Huile lubrifiante	oui		
Poids dynamique sans PPK 150T (4x)	21000 kg	Jeu de tuyau:	
Poids dynamique avec PPK 150T (4x)	26200 kg	Longueur	60 m
Poids total sans PPK 150T (4x) & tuyaux	29000 kg	Poids de transport (±)	3050 kg

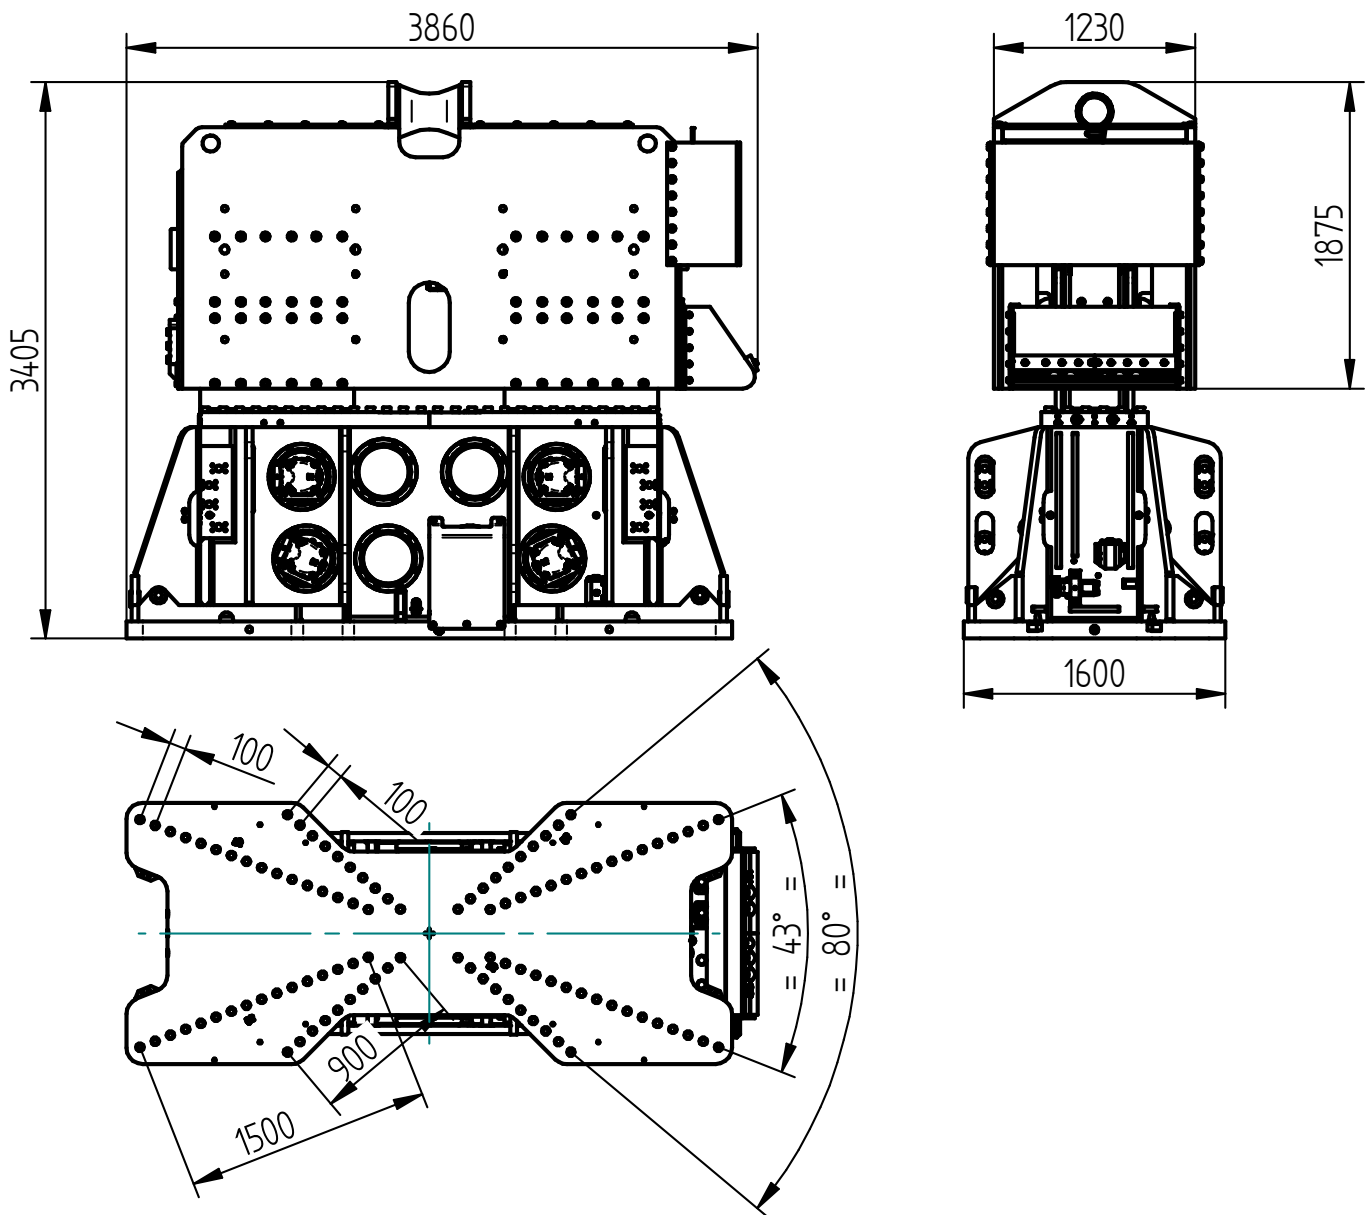**Specificaties****PVE 200M**

Excentrisch moment	200 kgm	Klemmen:	
Max. centrifugaalkracht	4300 kN	Pijpenklem	PPK 150T (4x)
Max. toerental	1400 rpm	Transportgewicht per klem	1300 kg
Max. amplitude excl. PPK 150T (4x)	19 mm		
Max. amplitude incl. PPK 150T (4x)	15.3 mm		
Max. statische trekkracht	1800 kN		
Max. werkdruk	350 bar	Aggregaat:	
Max. oliedoorstroming	1680 l/min	Model	1600 series
Geforceerde smering	ja		
Dynamisch gewicht excl. PPK 150T (4x)	21000 kg	Slangenset:	
Dynamisch gewicht incl. PPK 150T (4x)	26200 kg	Lengte	60 m
Totaalgewicht excl. PPK 150T (4x) & slangen	29000 kg	Transportgewicht (±)	3050 kg

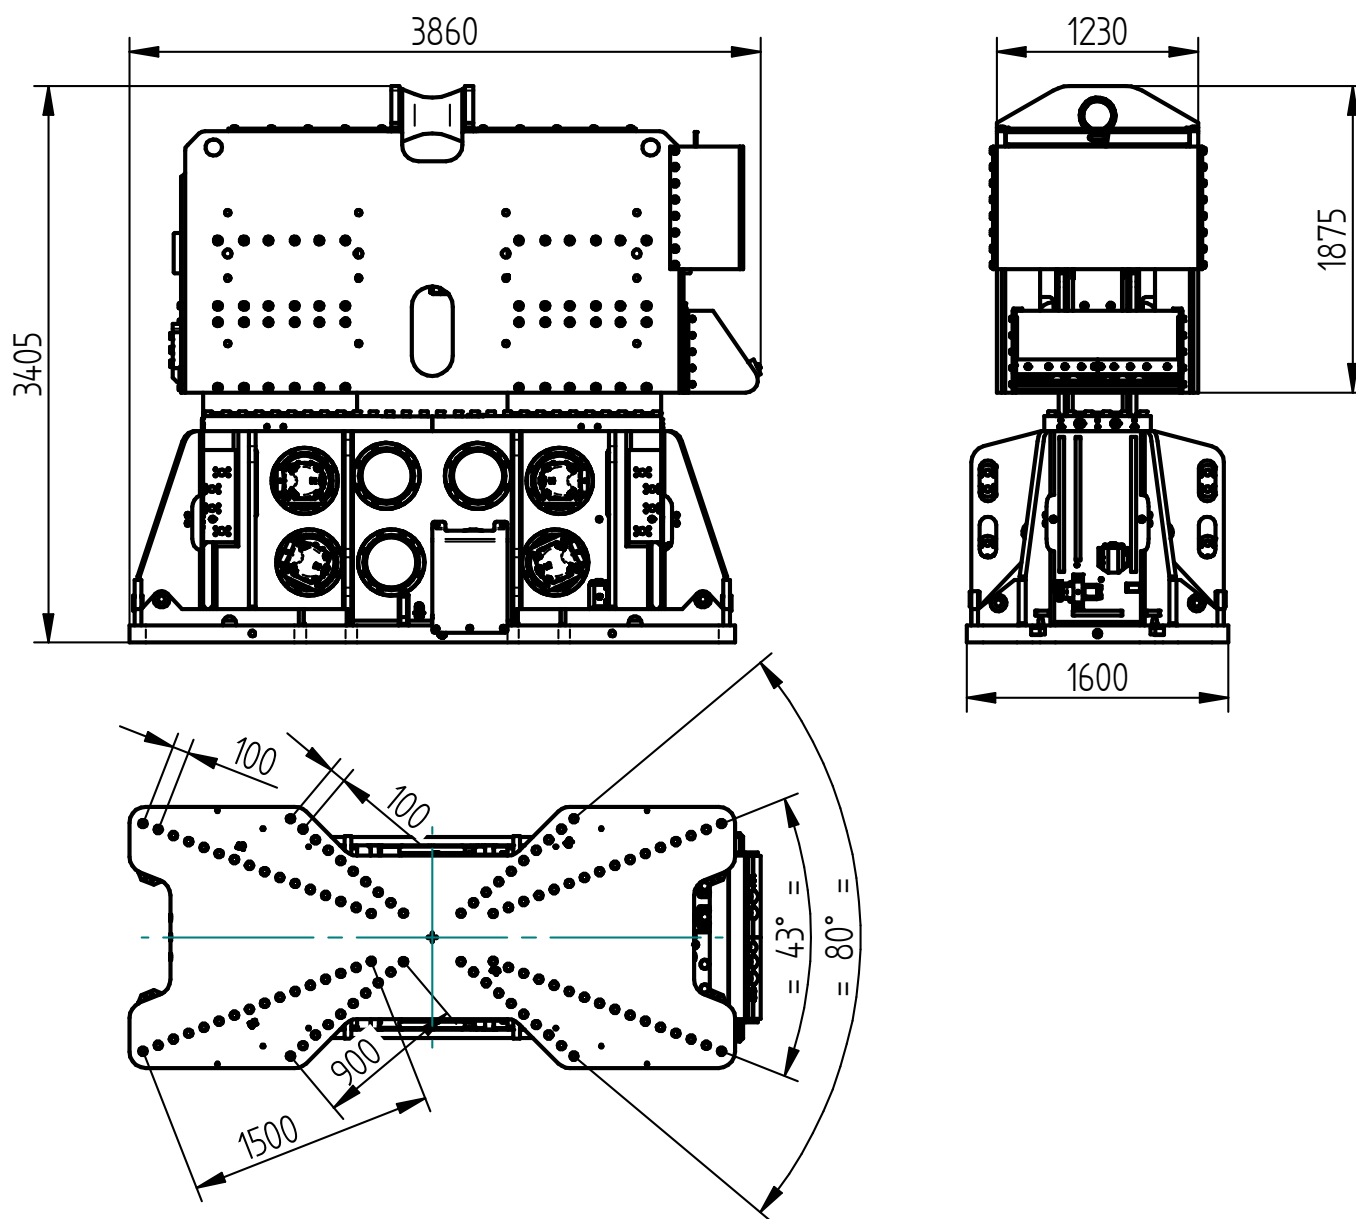

Specificatii

PVE 200M

Moment excentric	200 kgm	Menghina:	
Forta centrifuga maxima	4300 kN	Menghina dubla	PPK 150T (4x)
Frecventa maxima	1400 rpm	Greutatea transportului pe buc.	1300 kg
Amplitudinea maxima exclusiv PPK 150T (4x)	19 mm		
Amplitudinea maxima inclusiv PPK 150T (4x)	15.3 mm		
Tractiune statica maxima	1800 kN		
Presiunea maxima de lucru	350 bar	Unitate de putere:	
Debit maxim de ulei	1680 l/min	Model	1600 series
Ungere fortata	da		
Greutate dinamica exclusiv PPK 150T (4x)	21000 kg	Set furtun:	
Greutate dinamica inclusiv PPK 150T (4x)	26200 kg	Lungime	60 m
Greutate totala cu furtun atasat PPK 150T (4x)	29000 kg	Greutatea transportului	3050 kg




Specifications

PVE 200M

Vibro Hammer

USA

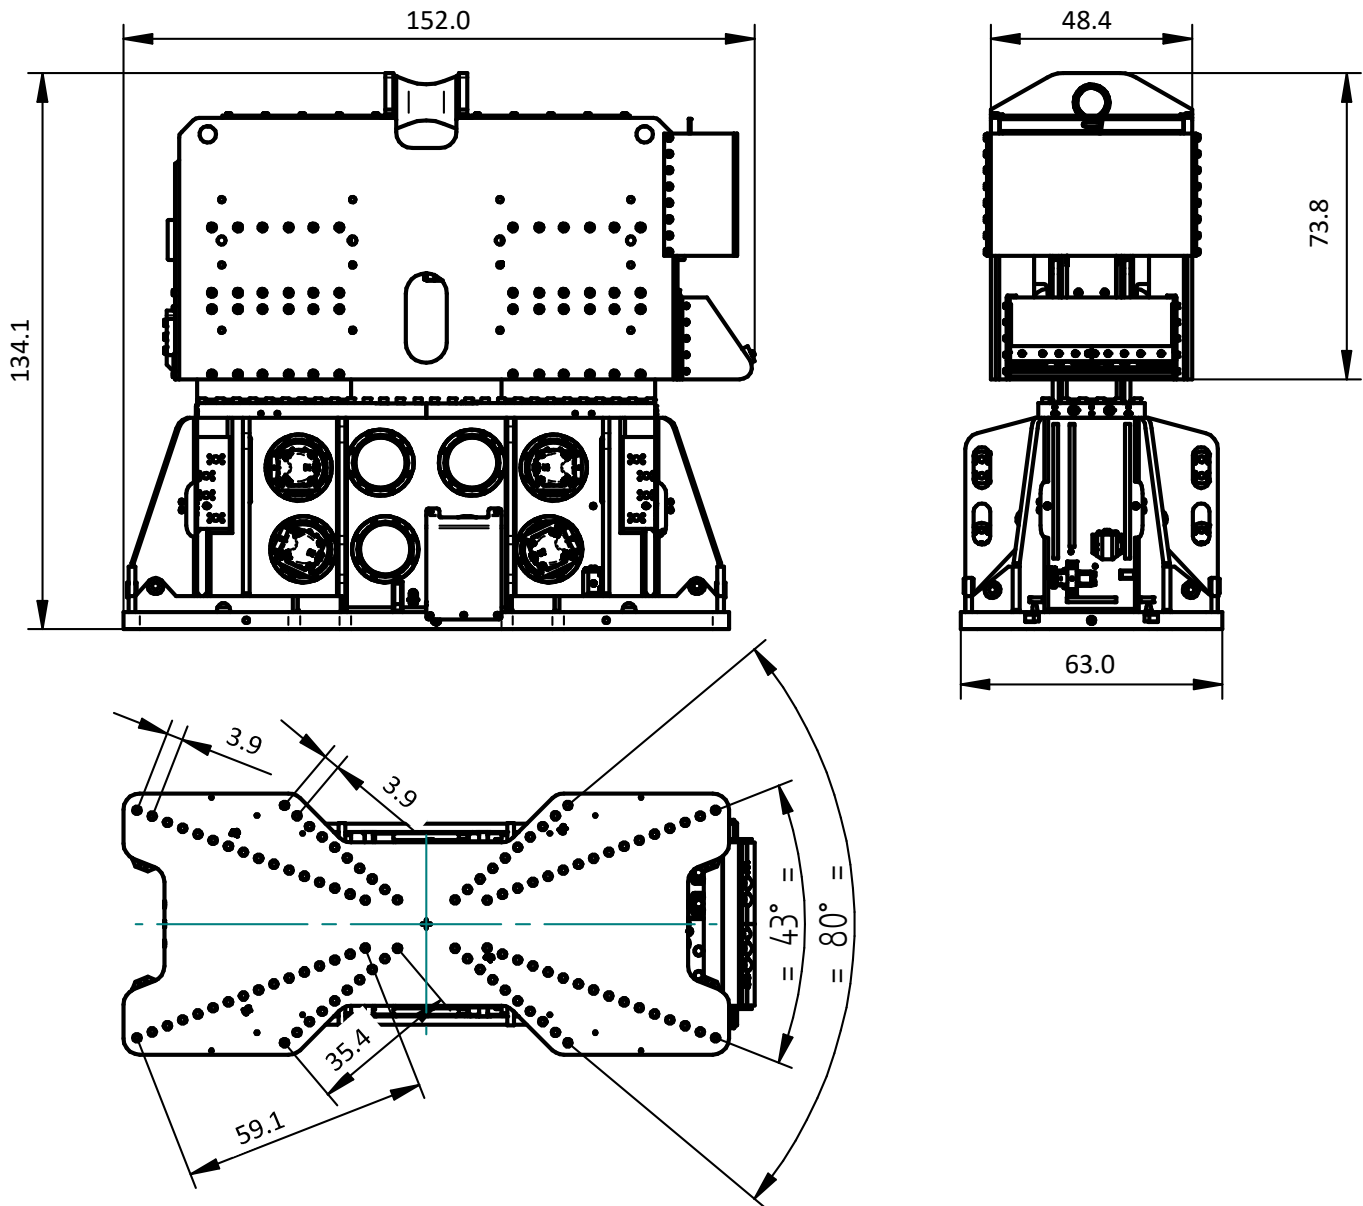

Specifications

PVE 200M

Eccentric moment	0-17361.1 lbs in	Clamps:	
Max. centrifugal force	0-483.4 US tn	Double clamps	PPK 150T (4x)
Max. frequency	1400 rpm	Transport weight per piece	2866 lbs
Max. amplitude excluding PPK 150T (4x)	0.75 in		
Max. amplitude including PPK 150T (4x)	N/A in		
Max. static line-pull	183.6 US tn		
Max. operating pressure	5076 psi	Powerpack:	
Max. oil flow	444 gal/min	Model	1600 series
Forced lubrication	yes		
Dynamic weight excluding PPK 150T (4x)	46297 lbs	Hose set:	
Dynamic weight including PPK 150T (4x)	57761 lbs	Length	197 ft
Total weight excluding PPK 150T (4x) & hoses	63934 lbs	Transport weight (±)	6724 lbs