



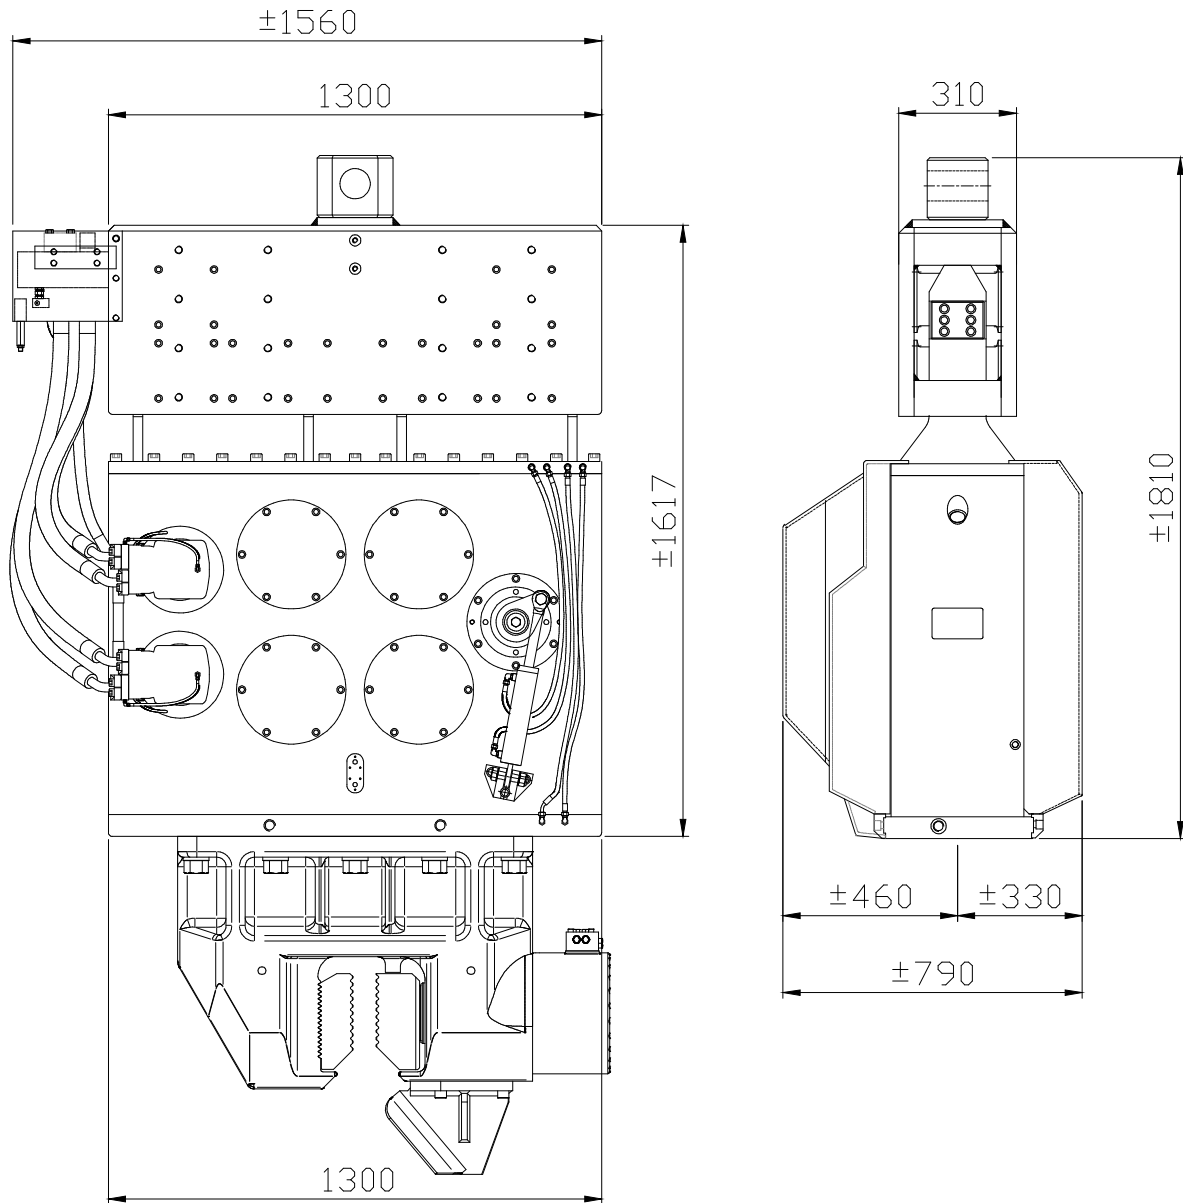

Specifications :

ICE 23RFB


Eccentric moment	0-23 kgm	Clamps:	
Max. centrifugal force	0-1350 kN	Sheet pile clamp	160TU
Max. frequency	2300 rpm	Transport weight per piece	1100 kg
Max. amplitude excl. 160TU	19 mm	Double clamps	PPK 80T
Max. amplitude incl. 160TU	12.7 mm	Transport weight per piece	500 kg
Max. static line-pull	300 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	561 l/min	Model	N/A
Forced lubrication	yes		
Dynamic weight excl. 160TU	2350 kg	Hose set:	
Dynamic weight incl. 160TU	3620 kg	Length	N/A m
Total weight excl. 160TU & hoses	4670 kg	Transport weight (±)	N/A kg

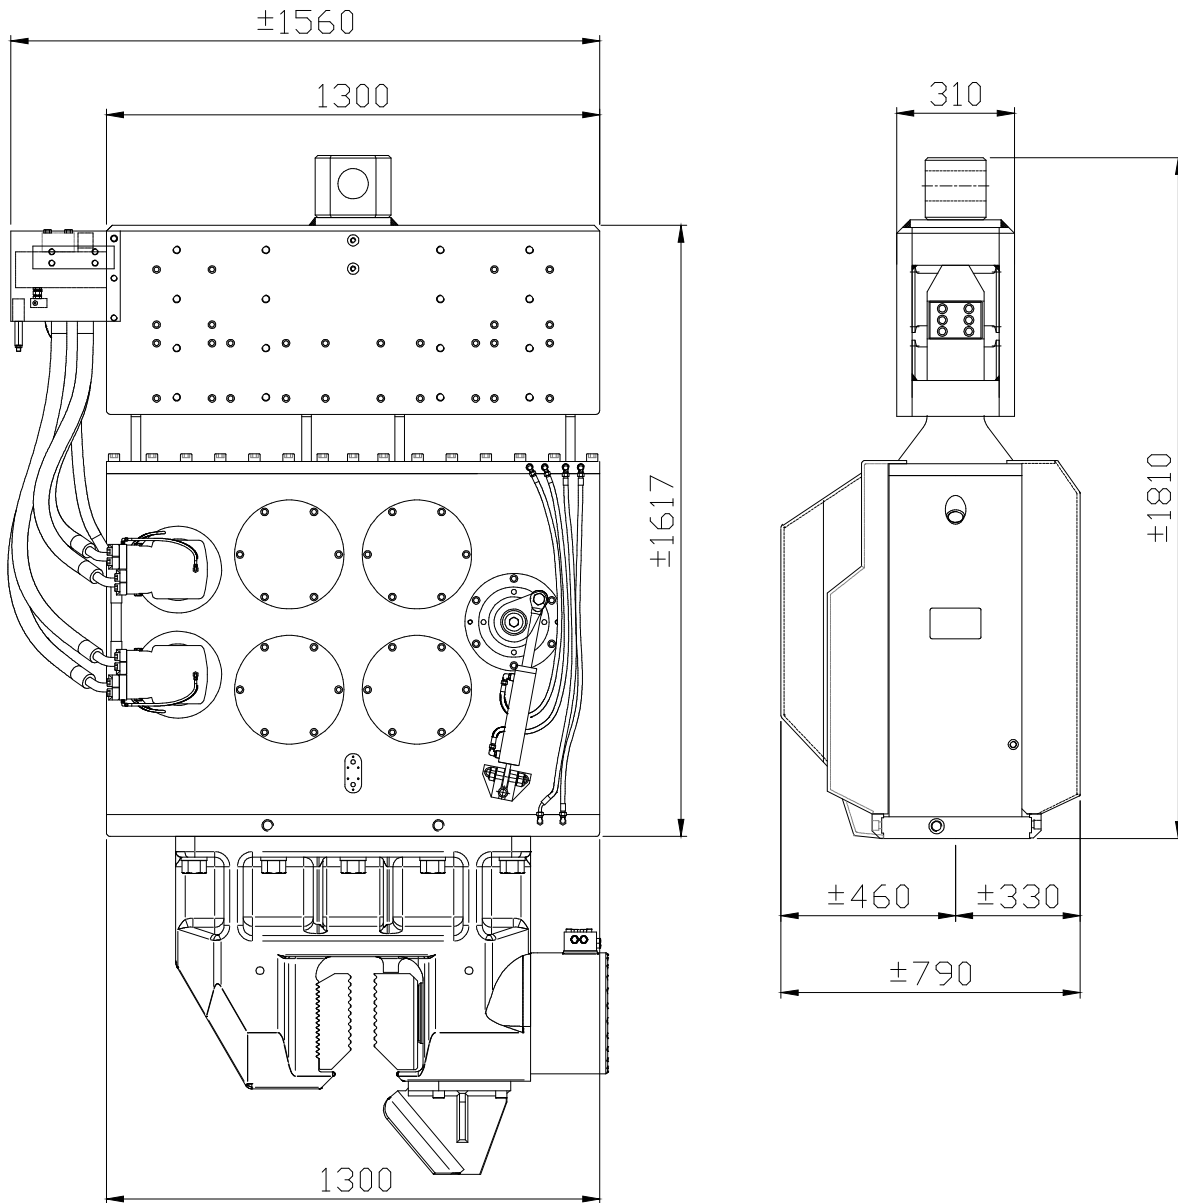

Technische Daten :

ICE 23RFB


Statisches Moment	0-23 kgm	Klemmzange:	
Max. Fliehkraft	0-1350 kN	Universalzange	160TU
Max. Drehzahl	2300 rpm	Transportgew. pro Stück	1100 kg
Max. Amplitude ohne 160TU	19 mm	Rohrklemmzange	PPK 80T
Max. Amplitude mit 160TU	12.7 mm	Transportgew. pro Stück	500 kg
Max. Statische Zugkraft	300 kN		
Max. Betriebsdruck	350 bar	Aggregat:	
Max. Fördermenge	561 l/min	Modell	N/A
Zwangsschmierung	ja		
Dyn. Gewicht ohne 160TU	2350 kg	Schlauchsatz:	
Dyn. Gewicht mit 160TU	3620 kg	Länge	N/A m
Gesamtgew. ohne 160TU & Schläuche	4670 kg	Transportgewicht (±)	N/A kg

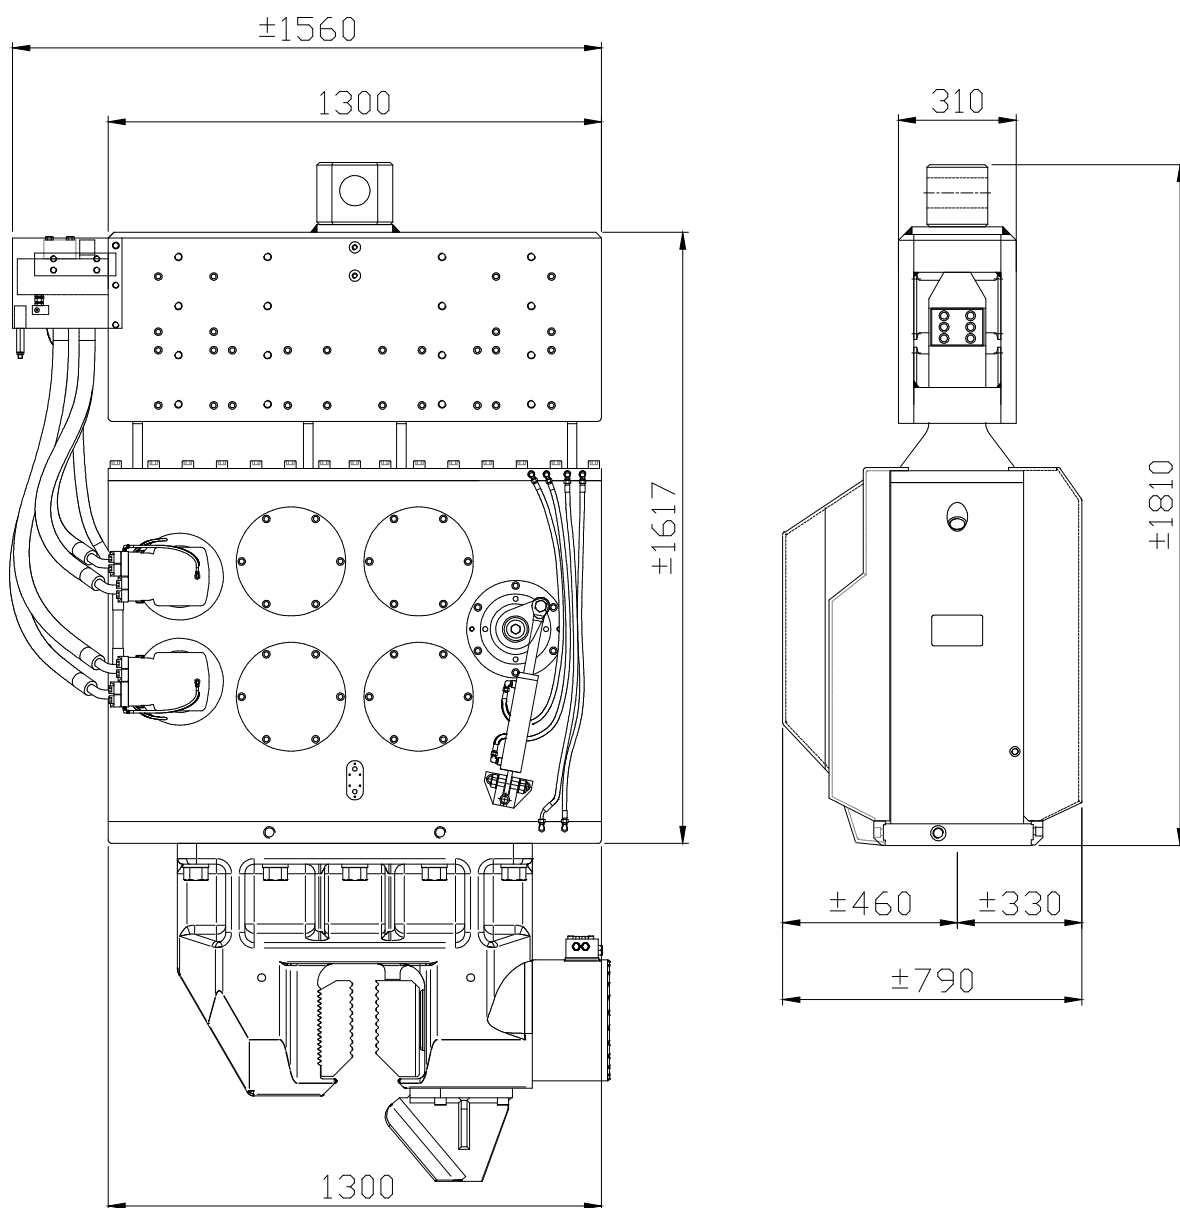

Spécifications

ICE 23RFB


Moment excentrique	0-23 kgm	Pincés:	
Max. force centrifuge	0-1350 kN	Pince palplanche	160TU
Max. fréquence	2300 rpm	Poids de transport par pièce	1100 kg
Max. amplitude sans 160TU	19 mm	Pince tube	PPK 80T
Max. amplitude avec 160TU	12.7 mm	Poids de transport par pièce	500 kg
Force de traction statique	300 kN		
Pression de travail max.	350 bar	Groupe hydraulique:	
Débit d'huile max.	561 l/min	Modèle	N/A
Huile lubrifiante	oui		
Poids dynamique sans 160TU	2350 kg	Jeu de tuyau:	
Poids dynamique avec 160TU	3620 kg	Longueur	N/A m
Poids total sans 160TU & tuyaux	4670 kg	Poids de transport (±)	N/A kg

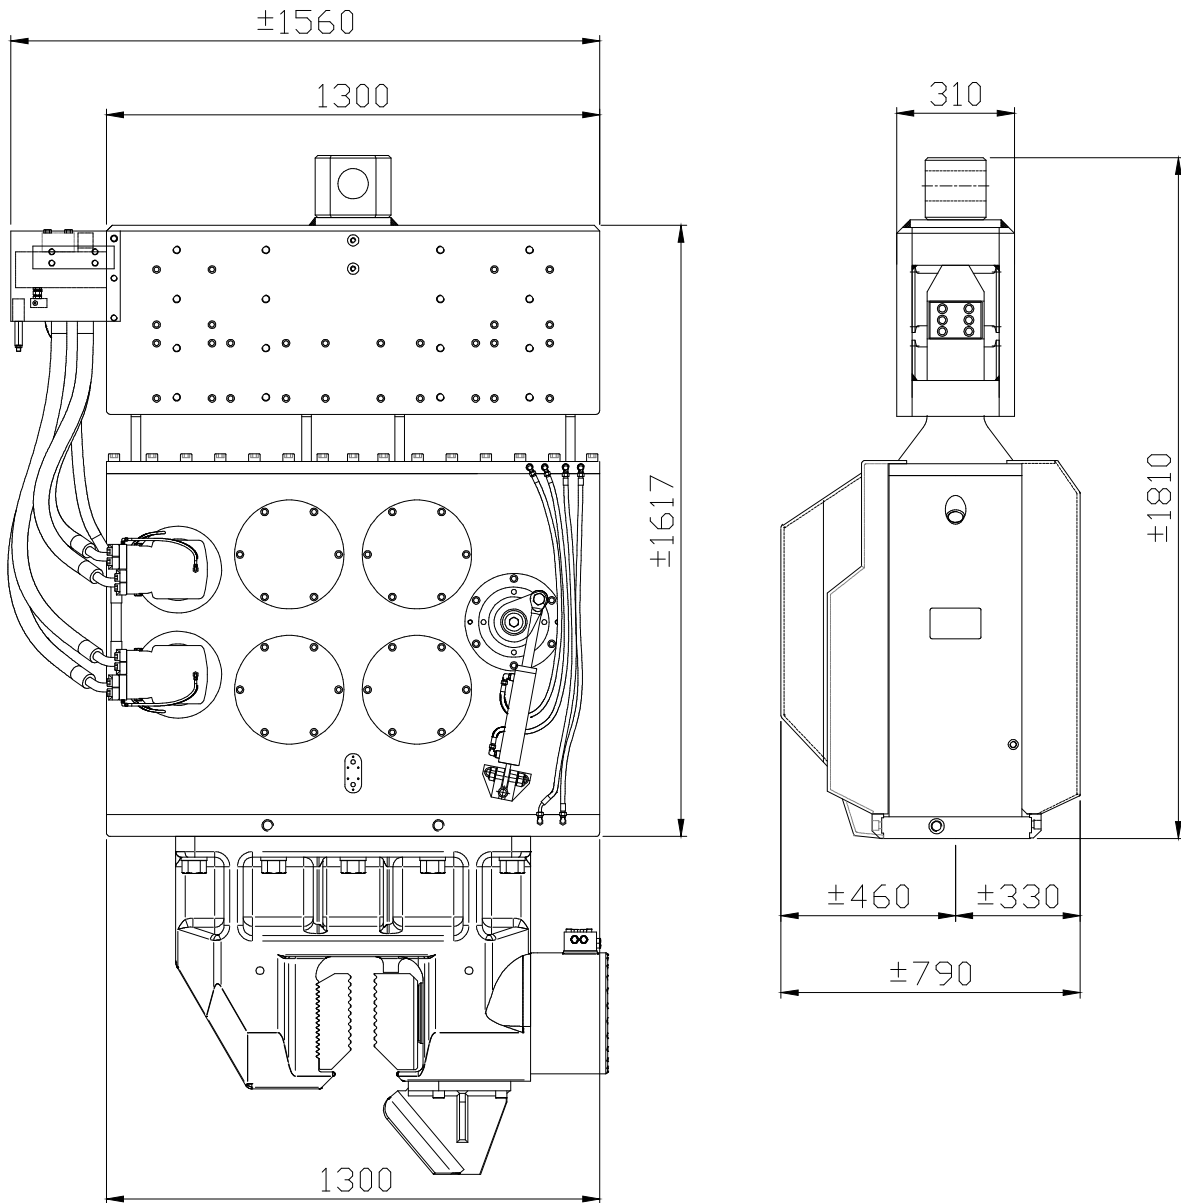


Specificaties

ICE 23RFB

Excentrisch moment	0-23 kgm	Klemmen:	
Max. centrifugaalkracht	0-1350 kN	Damwandklem	160TU
Max. toerental	2300 rpm	Transportgewicht per klem	1100 kg
Max. amplitude excl. 160TU	19 mm	Pijpenklem	PPK 80T
Max. amplitude incl. 160TU	12.7 mm	Transportgewicht per klem	500 kg
Max. statische trekkracht	300 kN		
Max. werkdruk	350 bar	Aggregaat:	
Max. oliedoorstroming	561 l/min	Model	N/A
Geforceerde smering	ja		
Dynamisch gewicht excl. 160TU	2350 kg	Slangenset:	
Dynamisch gewicht incl. 160TU	3620 kg	Lengte	N/A m
Totaalgewicht excl. 160TU & slangen	4670 kg	Transportgewicht (±)	N/A kg

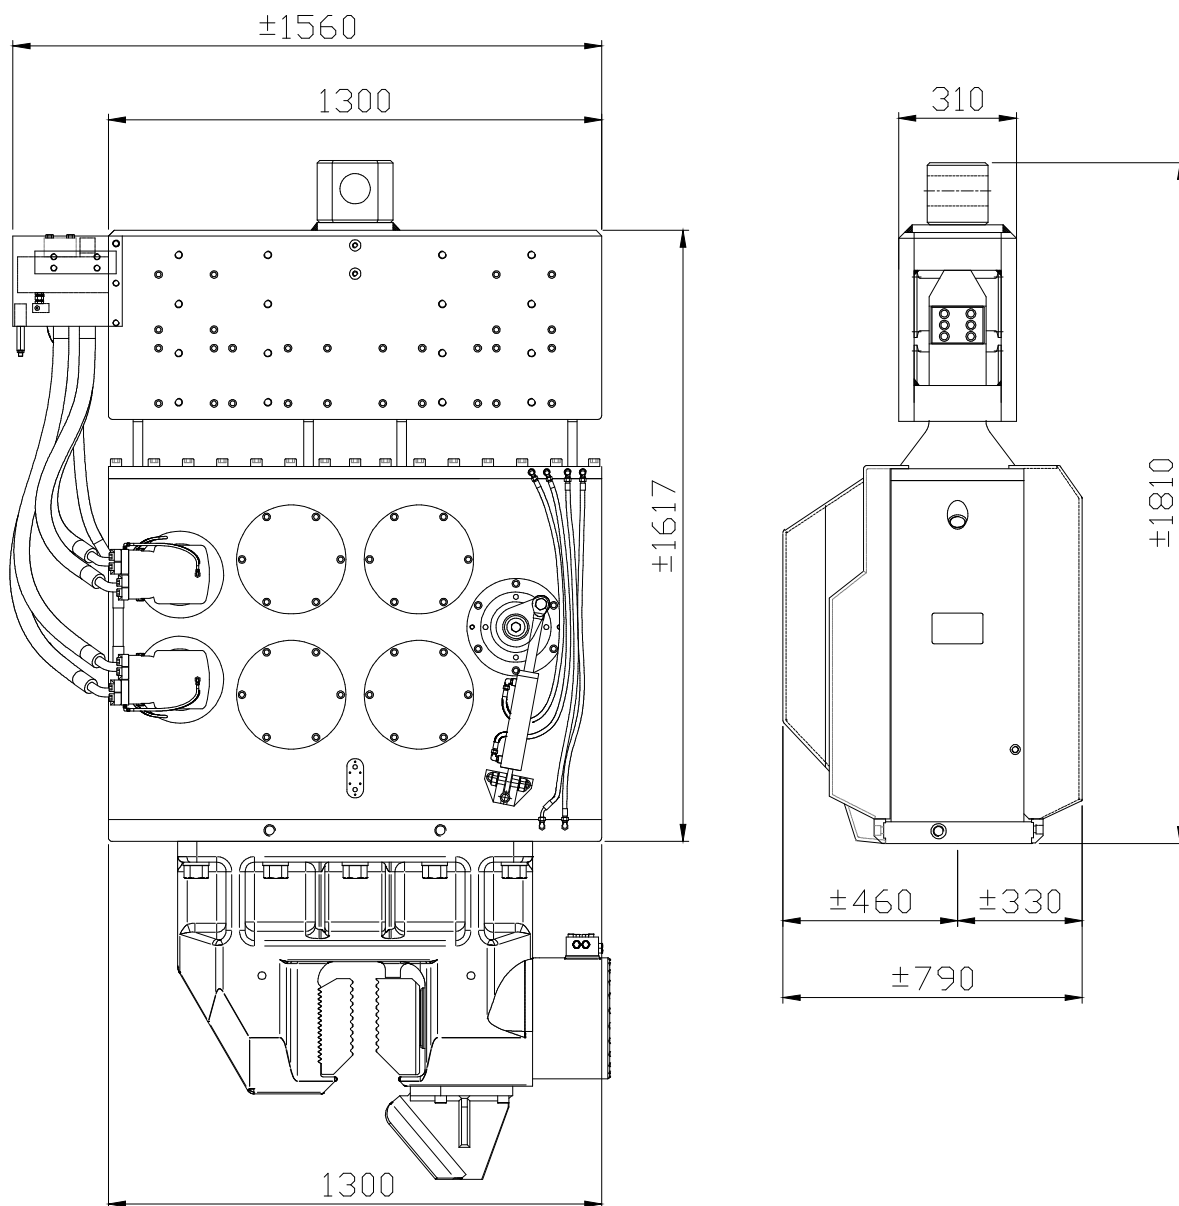
Specificatii
ICE 23RFB

Moment excentric	0-23 kgm	Menghina:	
Forta centrifuga maxima	0-1350 kN	Menghina pentru palplanse	160TU
Frecventa maxima	2300 rpm	Greutatea transportului pe buc.	1100 kg
Amplitudinea maxima excluzand 160TU	19 mm	Menghina dubla	PPK 80T
Amplitudinea maxima inclusiv 160TU	12.7 mm	Greutatea transportului pe buc.	500 kg
Tractiune statica maxima	300 kN		
Presiunea maxima de lucru	350 bar	Unitate de putere:	
Debit maxim de ulei	561 l/min	Model	N/A
Ungere fortata	da		
Greutate dinamica excluzand 160TU	2350 kg	Set furtun:	
Greutate dinamica inclusiv 160TU	3620 kg	Lungime	N/A m
Greutate totala excl. 160TU & furtunuri	4670 kg	Greutatea tranportului (±)	N/A kg

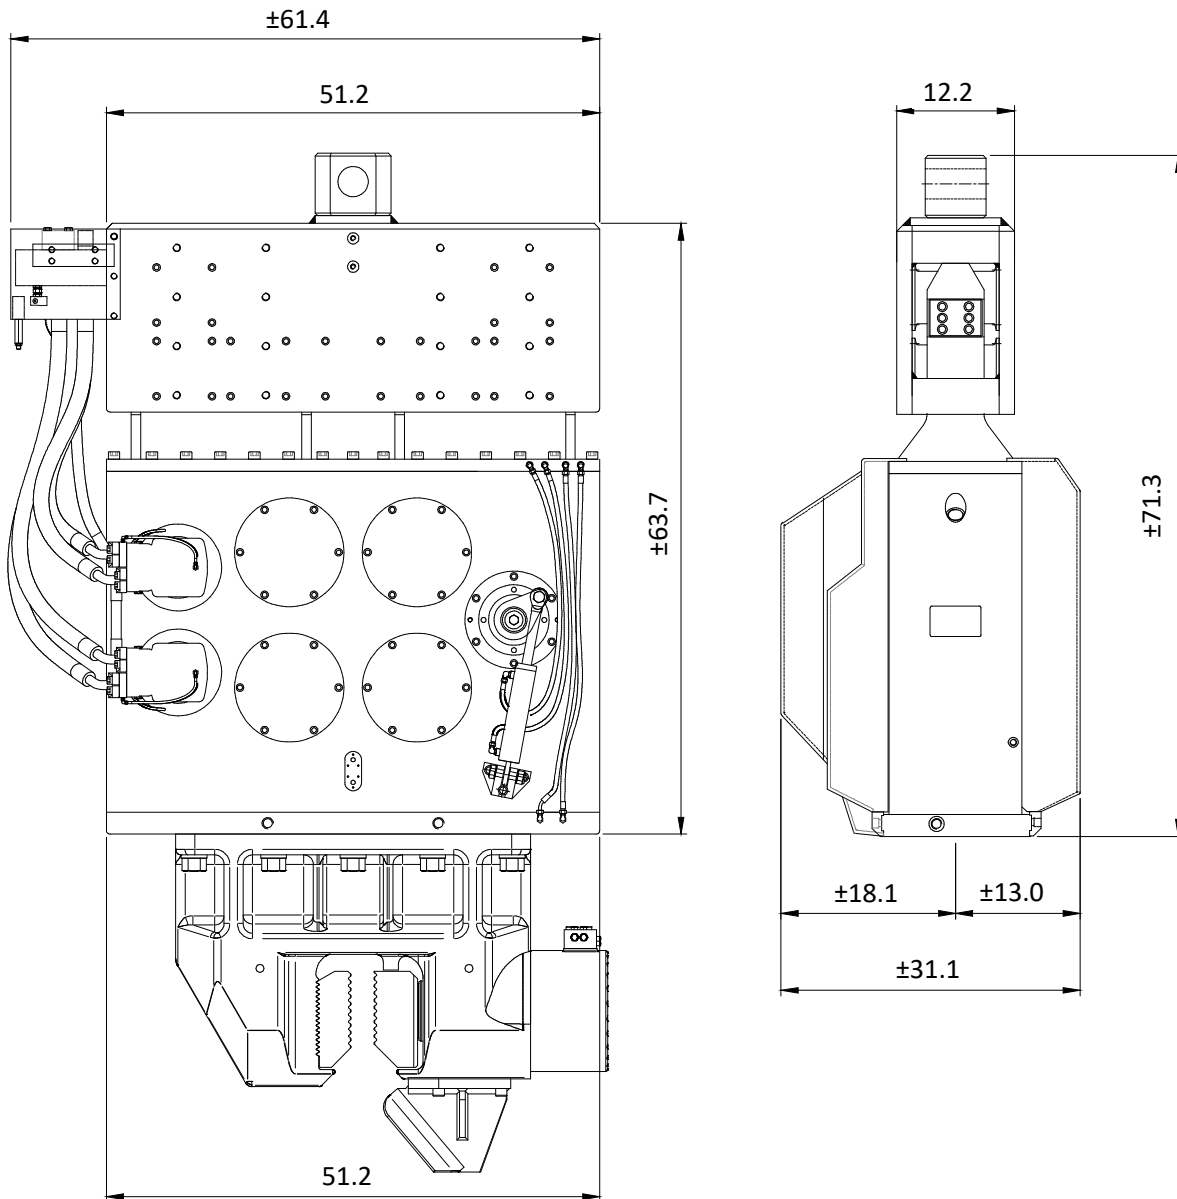

Specifications

ICE 23RFB

Eccentric moment	0-1736.1 lbs in	Clamps:	
Max. centrifugal force	0-151.8 US tn	Sheet pile clamp	160TU
Max. frequency	2300 rpm	Transport weight per piece	2425 lbs
Max. amplitude excluding 160TU	0.75 in	Double clamps	PPK 80T
Max. amplitude including 160TU	0.50 in	Transport weight per piece	1102 lbs
Max. static line-pull	30.6 US tn		
Max. operating pressure	5076 psi	Powerpack:	
Max. oil flow	148 gal/min	Model	N/A
Forced lubrication	yes		
Dynamic weight excluding 160TU	5181 lbs	Hose set:	
Dynamic weight including 160TU	7981 lbs	Length	N/A ft
Total weight excluding 160TU & hoses	10296 lbs	Transport weight (±)	N/A lbs