




Specification sheet

PVE 250M

Vibro Hammer


English

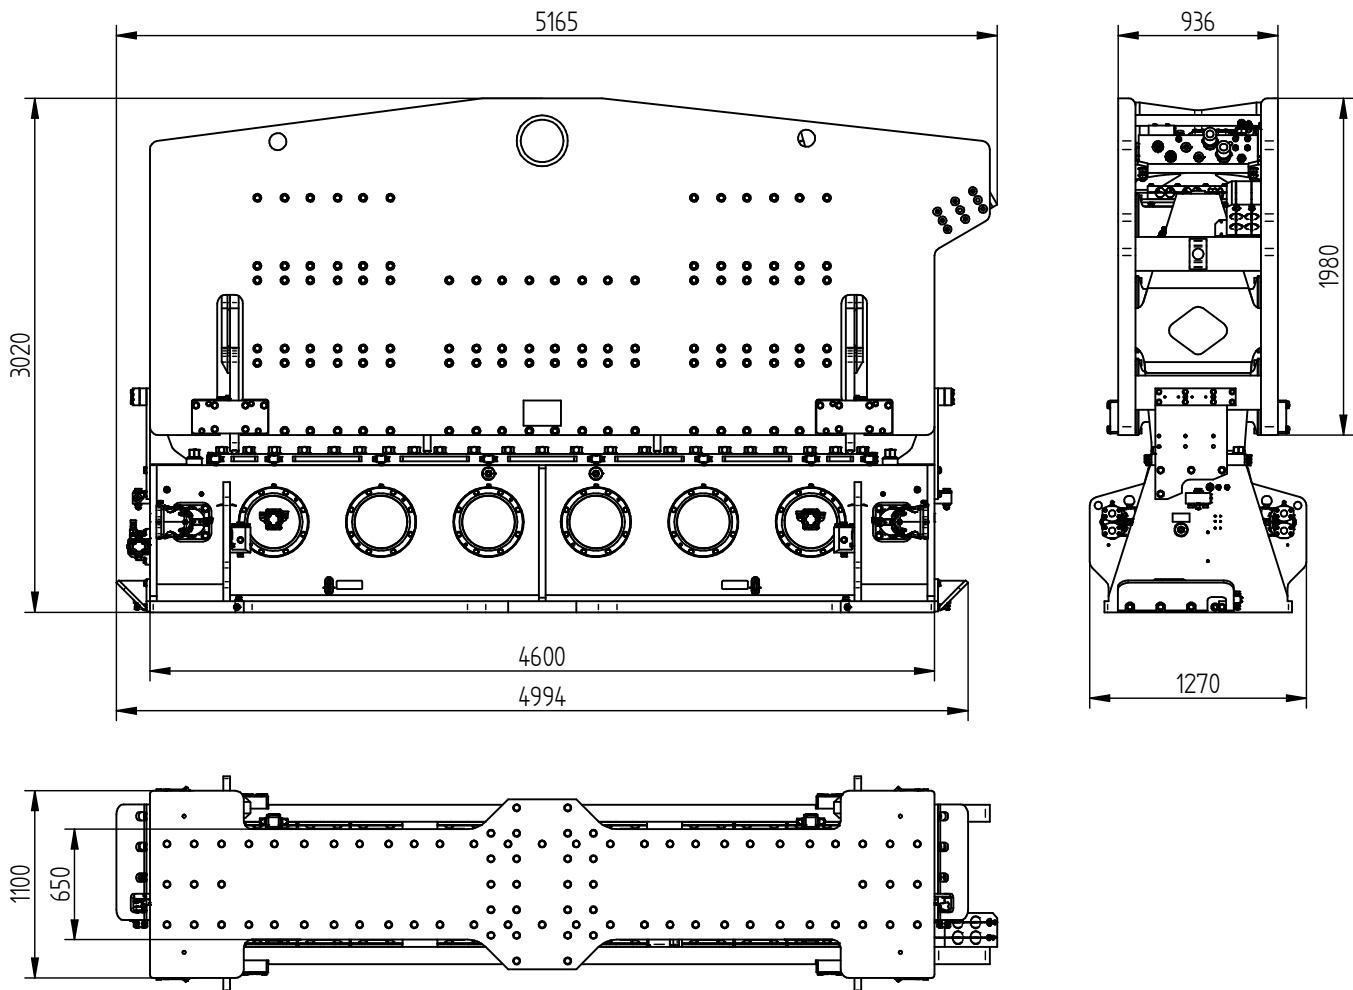

Specifications :

PVE 250M

Eccentric moment	250 kgm	Clamps:	
Max. centrifugal force	5374 kN	Double clamps	PPK 350T (2x)
Max. frequency	1400 rpm	Transport weight per piece	2980 kg
Max. amplitude excl. PPK 350T (2x)	31.6 mm		
Max. amplitude incl. PPK 350T (2x)	23 mm		
Max. static line-pull	2270 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	1600 l/min	Model	1600 series
Forced lubrication	yes		
Dynamic weight excl. PPK 350T (2x)	15820 kg	Hose set:	
Dynamic weight incl. PPK 350T (2x)	21780 kg	Length	60 m
Total weight excl. PPK 350T (2x) & hoses	25250 kg	Transport weight (±)	2760 kg

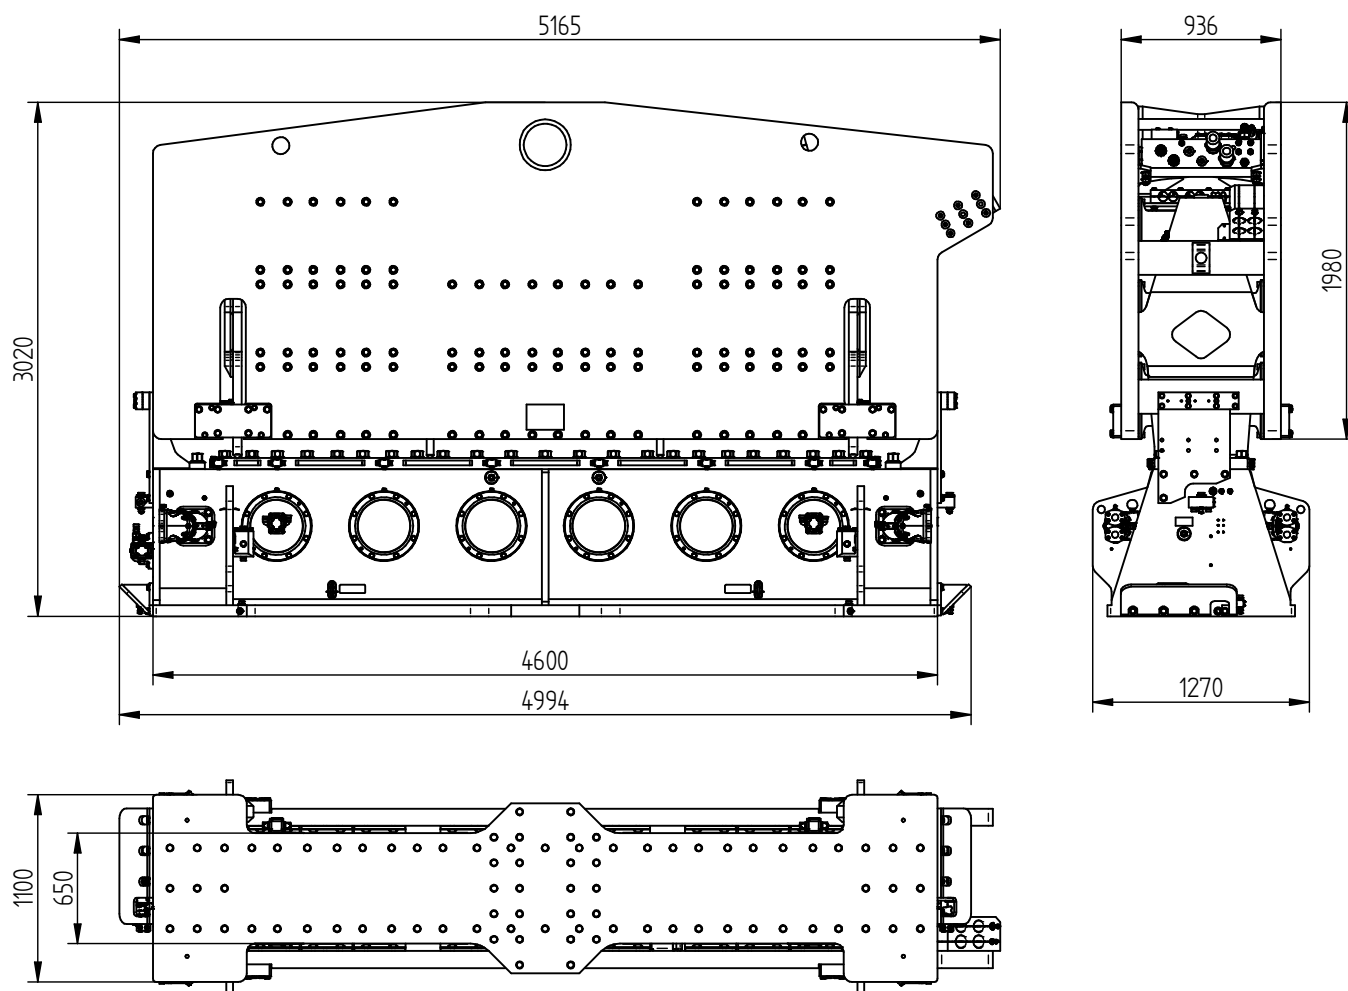

Technische Daten :

PVE 250M

Statisches Moment	250 kgm	Klemmzange:	
Max. Fliehkraft	5374 kN	Rohrklemmzange	PPK 350T (2x)
Max. Drehzahl	1400 rpm	Transportgew. pro Stück	2980 kg
Max. Amplitude ohne PPK 350T (2x)	31.6 mm		
Max. Amplitude mit PPK 350T(2x)	23 mm		
Max. Statische Zugkraft	2270 kN		
Max. Betriebsdruck	350 bar	Aggregat:	
Max. Fördermenge	1600 l/min	Modell	1600 series
Zwangsschmierung	ja		
Dyn. Gewicht ohne PPK 350T (2x)	15820 kg	Schlauchsatz:	
Dyn. Gewicht mit PPK 350T (2x)	21780 kg	Länge	60 m
Gesamtgew. ohne PPK 350T (2x) & Schläuche	25250 kg	Transportgewicht (±)	2760 kg




Spécifications

PVE 250M

Vibro Hammer


Français

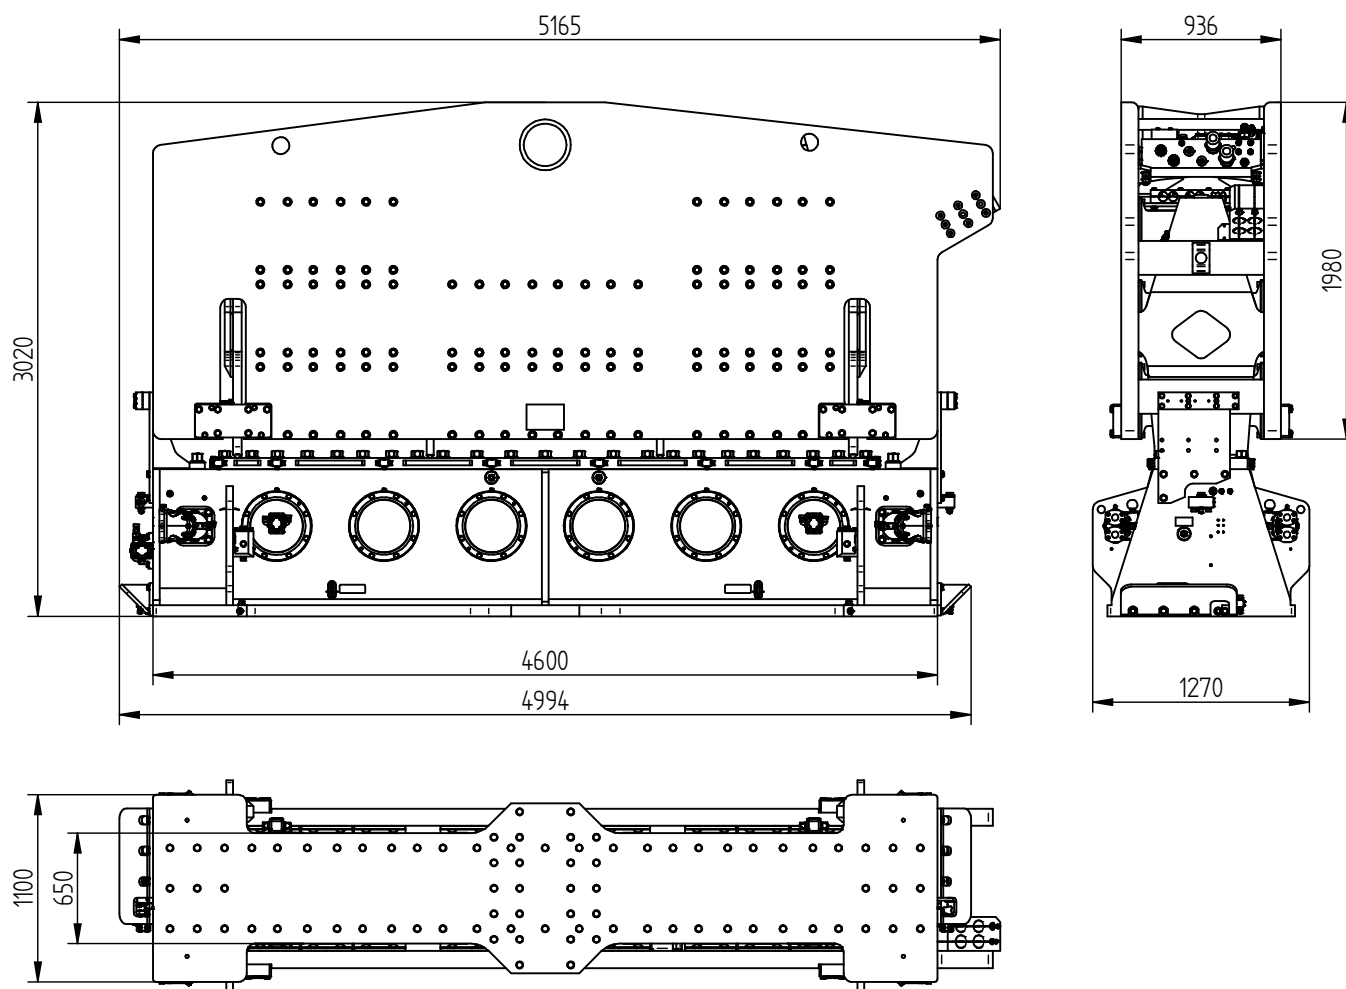


Spécifications

PVE 250M

Moment excentrique	250 kgm	Pincés:	
Max. force centrifuge	5374 kN	Pince tube	PPK 350T (2x)
Max. fréquence	1400 rpm	Poids de transport par pièce	2980 kg
Max. amplitude sans PPK 350T (2x)	31.6 mm		
Max. amplitude avec PPK 350T (2x)	23 mm		
Force de traction statique	2270 kN		
Pression de travail max.	350 bar	Groupe hydraulique:	
Débit d'huile max.	1600 l/min	Modèle	1600 series
Huile lubrifiante	oui		
Poids dynamique sans PPK 350T(2x)	15820 kg	Jeu de tuyau:	
Poids dynamique avec PPK 350T (2x)	21780 kg	Longueur	60 m
Poids total sans PPK 350T (2x) & tuyaux	25250 kg	Poids de transport (±)	2760 kg

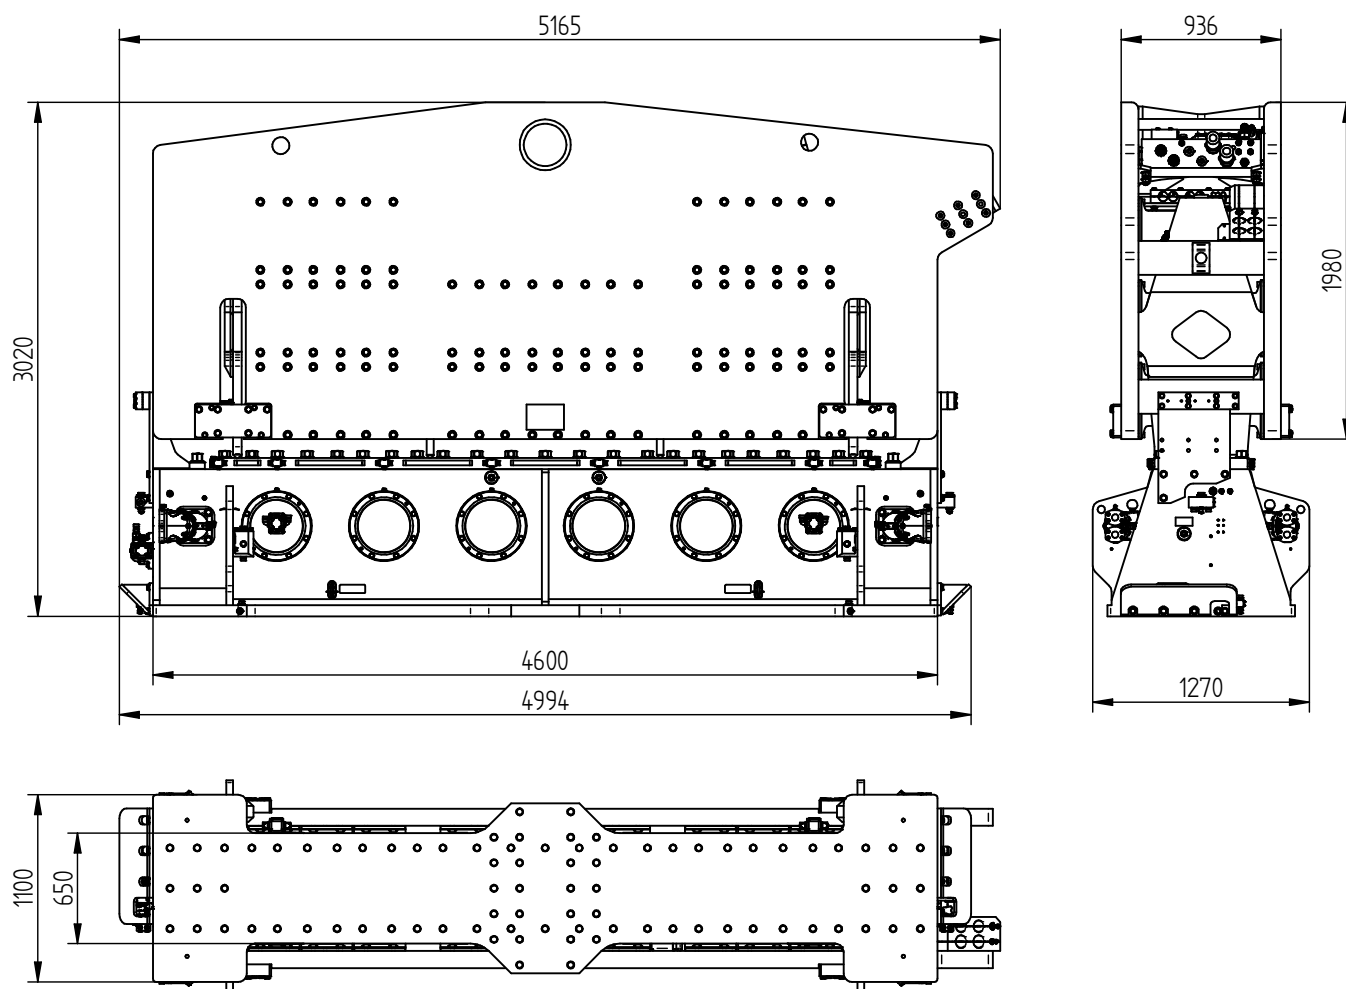**Specificaties****PVE 250M**

Excentrisch moment	250 kgm	Klemmen:	
Max. centrifugaalkracht	5374 kN	Pijpenklem	PPK 350T (2x)
Max. toerental	1400 rpm	Transportgewicht per klem	2980 kg
Max. amplitude excl. PPK 350T (2x)	31.6 mm		
Max. amplitude incl. PPK 350T (2x)	23 mm		
Max. statische trekkracht	2270 kN		
Max. werkdruk	350 bar	Aggregaat:	
Max. oliedoorstroming	1600 l/min	Model	1600 series
Geforceerde smering	ja		
Dynamisch gewicht excl. PPK 350T (2x)	15820 kg	Slangenset:	
Dynamisch gewicht incl. PPK 350T (2x)	21780 kg	Lengte	60 m
Totaalgewicht excl. PPK 350T (2x) & slangen	25250 kg	Transportgewicht (±)	2760 kg

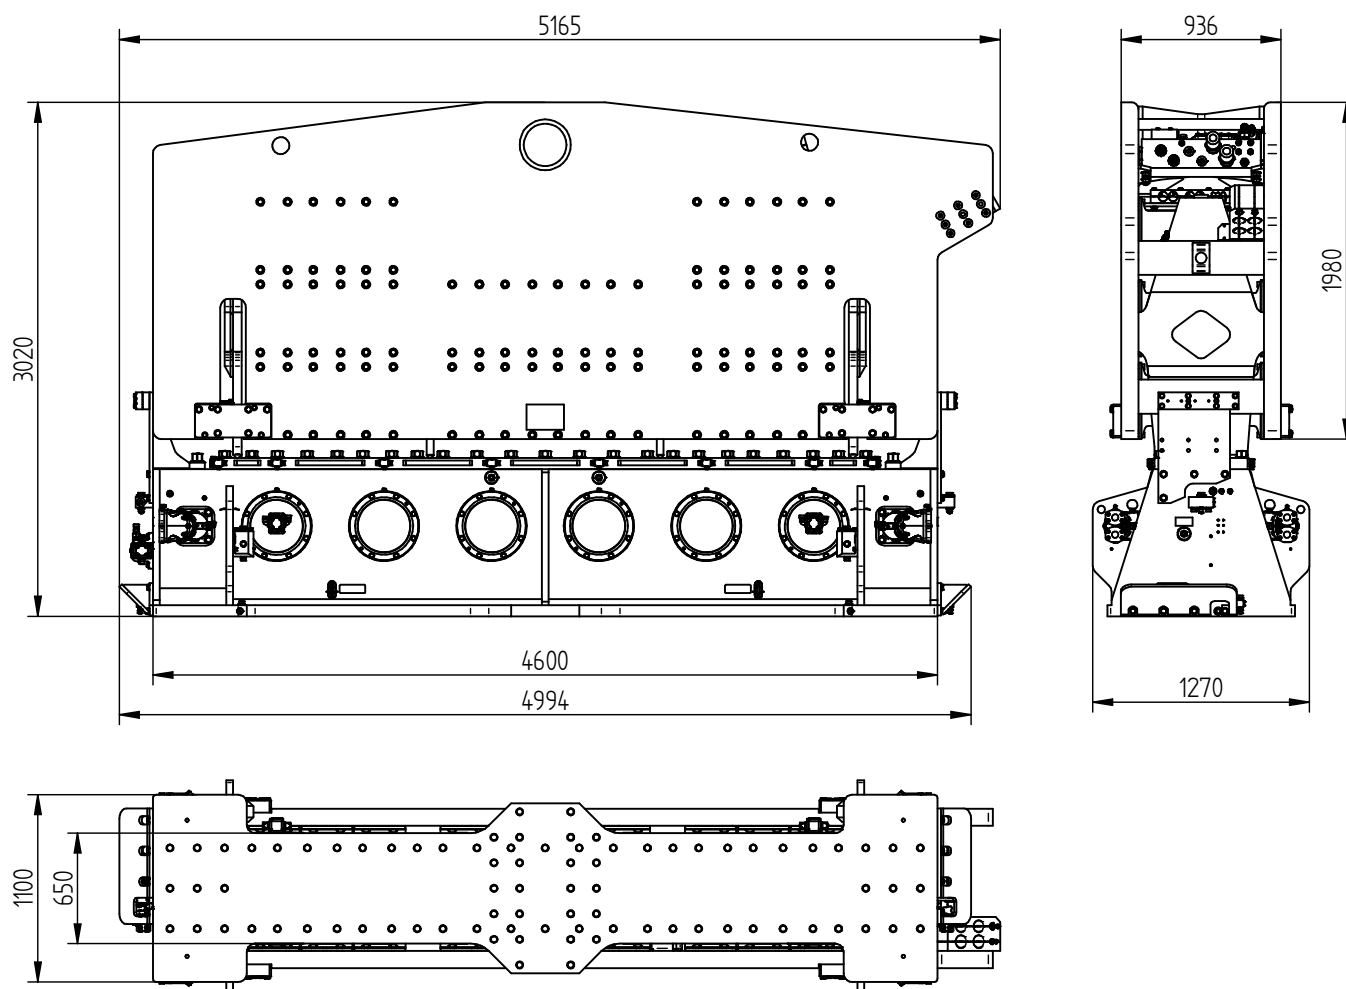

Specificatii

PVE 250M

Moment excentric	250 kgm	Menghina:	
Forta centrifuga maxima	5374 kN	Menghina dubla	PPK 350T (2x)
Frecventa maxima	1400 rpm	Greutatea transportului pe buc.	2980 kg
Amplitudinea maxima exclusiv PPK 350T (2x)	31.6 mm		
Amplitudinea maxima inclusiv PPK 350T (2x)	23 mm		
Tractiune statica maxima	2270 kN		
Presiunea maxima de lucru	350 bar	Unitate de putere:	
Debit maxim de ulei	1600 l/min	Model	1600 series
Ungere fortata	da		
Greutate dinamica exclusiv PPK 350T (2x)	15820 kg	Set furtun:	
Greutate dinamica inclusiv PPK 350T (2x)	21780 kg	Lungime	60 m
Greutate totala cu furtun atasat PPK 350T (2)	25250 kg	Greutatea transportului	2760 kg




Specifications

PVE 250M

Vibro Hammer

USA

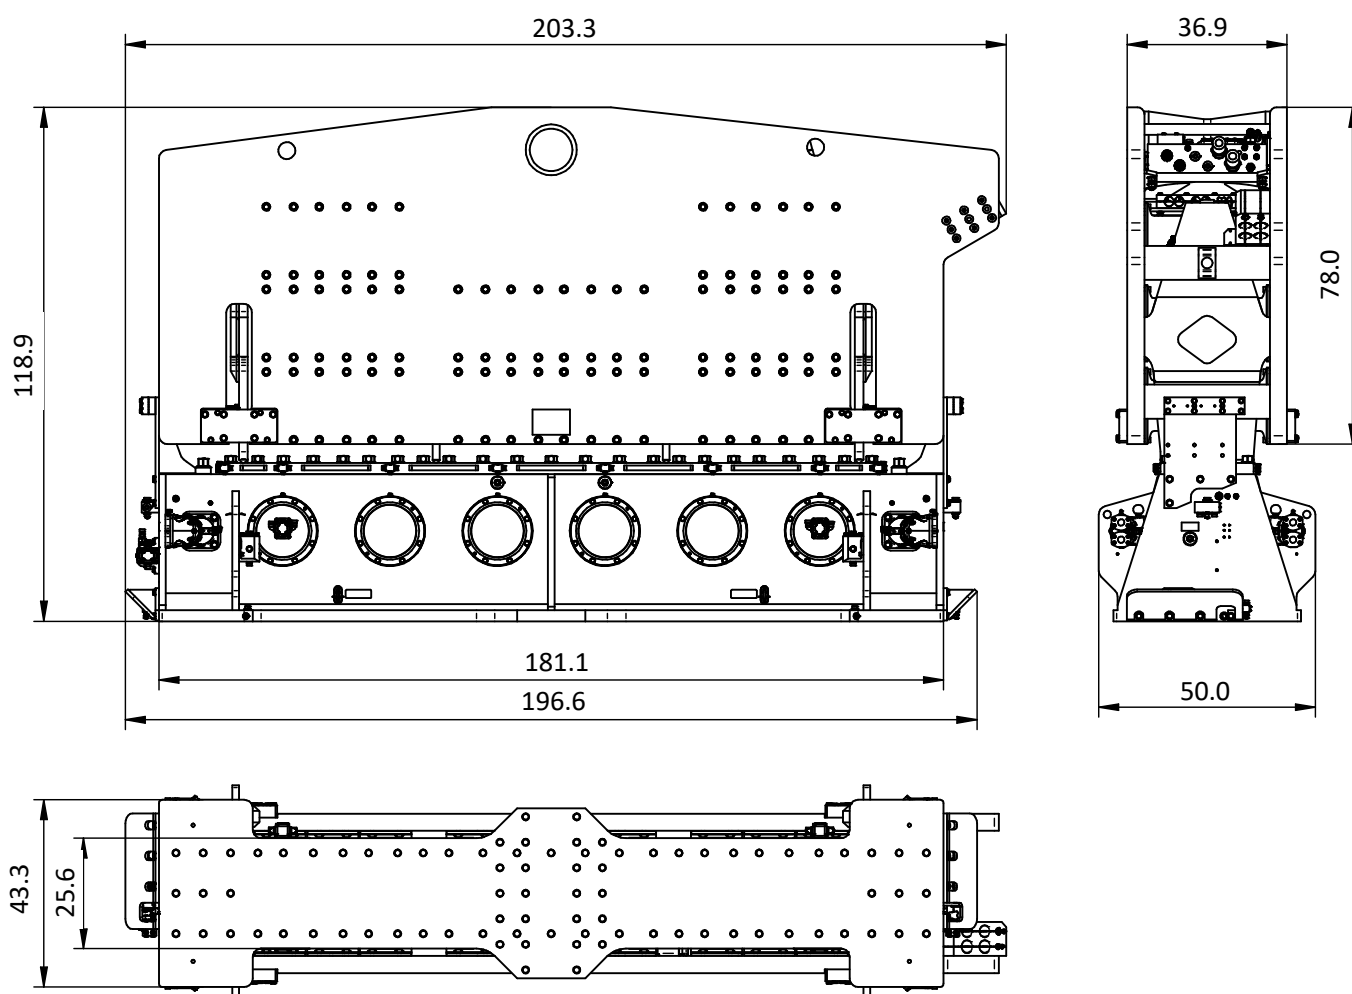

Specifications

PVE 250M

Eccentric moment	0-21701.4 lbs in	Clamps:	
Max. centrifugal force	0-604.1 US tn	Sheet pile clamp	PPK 350T (2x)
Max. frequency	1400 rpm	Transport weight per piece	6570 lbs
Max. amplitude excluding PPK 350T (2x)	1.24 in		
Max. amplitude including PPK 350T (2x)	N/A in		
Max. static line-pull	231.5 US tn		
Max. operating pressure	5076 psi	Powerpack:	
Max. oil flow	423 gal/min	Model	1600 series
Forced lubrication	yes		
Dynamic weight excluding PPK 350T (2x)	34877 lbs	Hose set:	
Dynamic weight including PPK 350T (2x)	N/A lbs	Length	197 ft
Total weight excluding PPK 350T (2x) & hoses	55667 lbs	Transport weight (±)	6085 lbs