



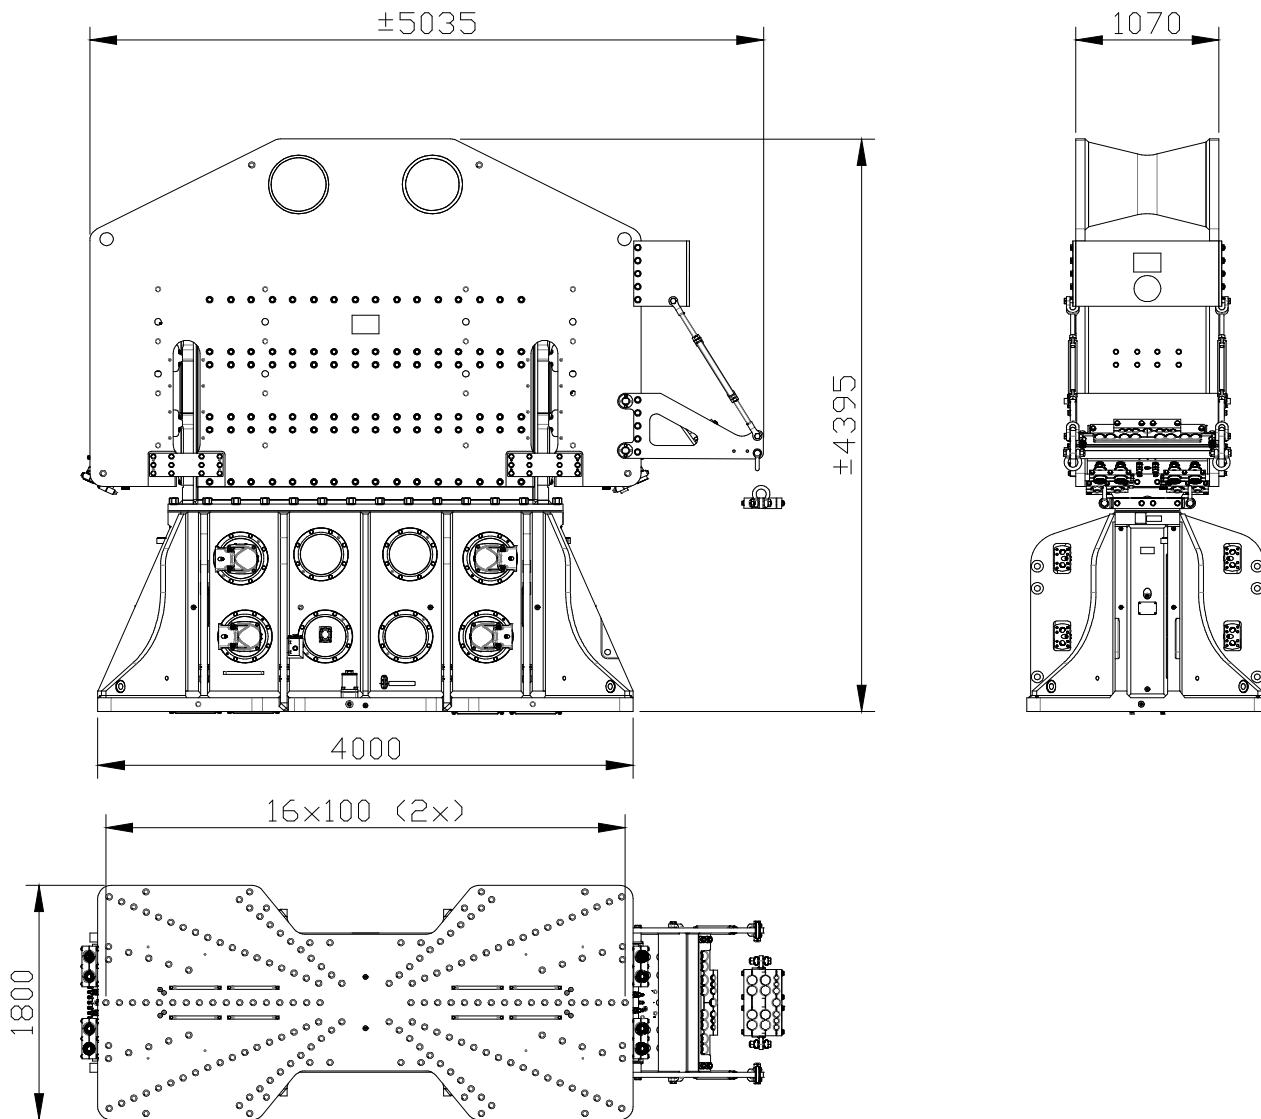

Specifications :

ICE 300NF


Eccentric moment	300 kgm	Clamps:	
Max. centrifugal force	6150 kN	Double clamps	210TC (4x)
Max. frequency	1400 rpm	Transport weight per piece	1600 kg
Max. amplitude excl. 210TC (4x)	21 mm		
Max. amplitude incl. 210TC (4x)	17 mm		
Max. static line-pull	4000 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	2800 l/min	Model	3200 series
Forced lubrication	yes		
Dynamic weight excl. 210TC (4x)	27250 kg	Hose set:	
Dynamic weight incl. 210TC (4x)	33650 kg	Length	60 m
Total weight excl. 210TC (4x) & hoses	47000 kg	Transport weight (±)	5200 kg

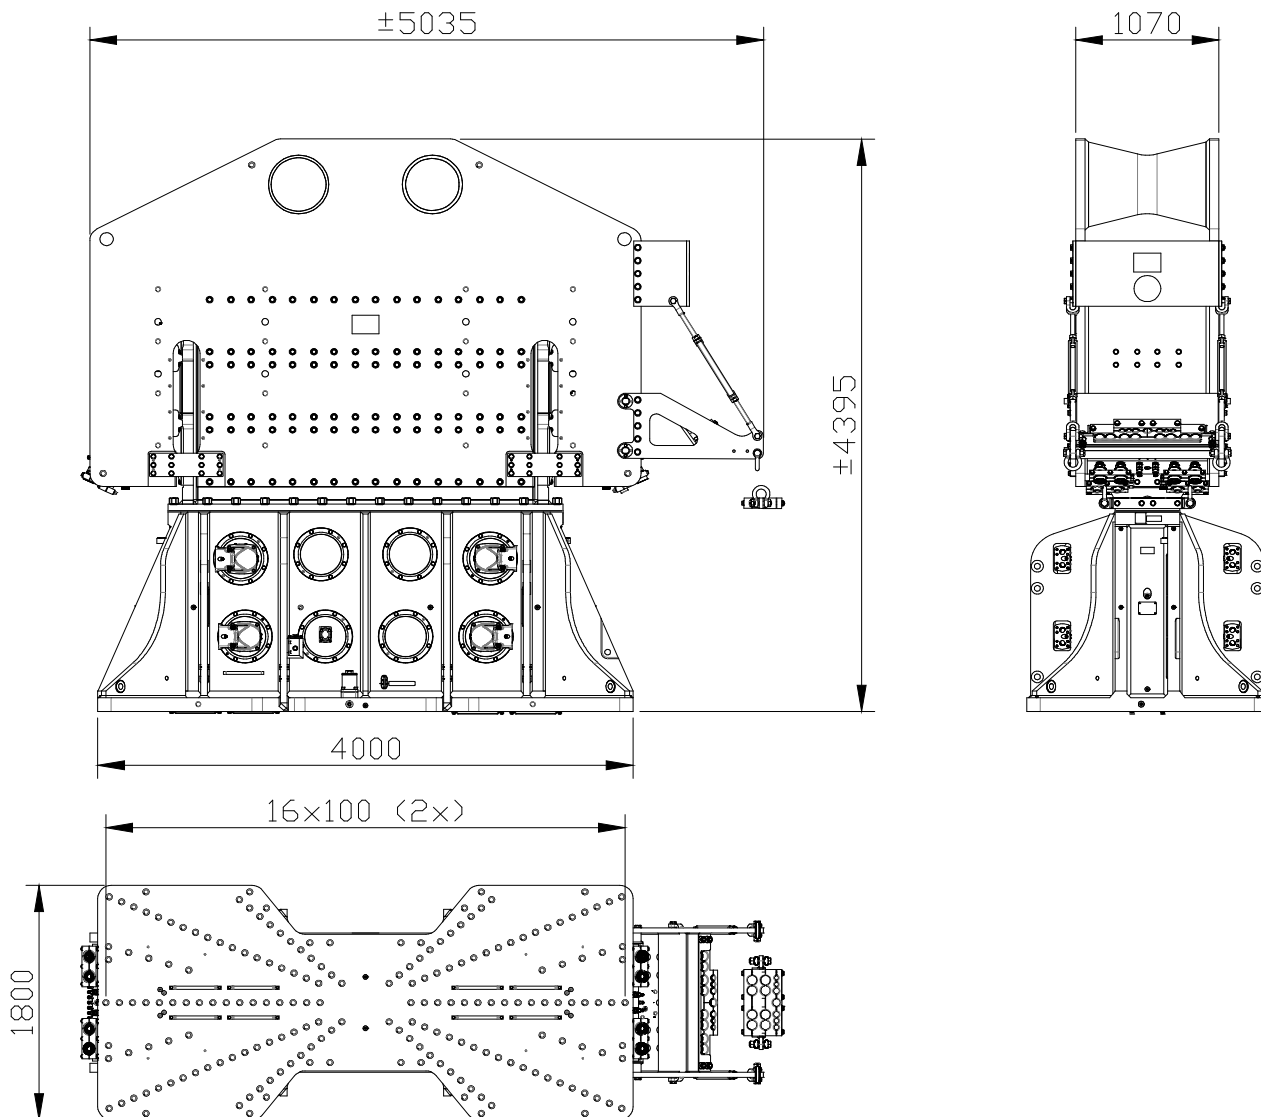

Technische Daten :

ICE 300NF


Statisches Moment	300 kgm	Klemmzange:	
Max. Fliehkraft	6150 kN	Rohrklemmzange	210TC (4x)
Max. Drehzahl	1400 rpm	Transportgew. pro Stück	1600 kg
Max. Amplitude ohne 210TC (4x)	21 mm		
Max. Amplitude mit 210TC (4x)	17 mm		
Max. Statische Zugkraft	4000 kN		
Max. Betriebsdruck	350 bar	Aggregat:	
Max. Fördermenge	2800 l/min	Modell	3200 series
Zwangsschmierung	ja		
Dyn. Gewicht ohne 210TC (4x)	27250 kg	Schlauchsatz:	
Dyn. Gewicht mit 210TC (4x)	33650 kg	Länge	60 m
Gesamtgew. ohne 210TC (4x) & Schläuche	47000 kg	Transportgewicht (±)	5200 kg

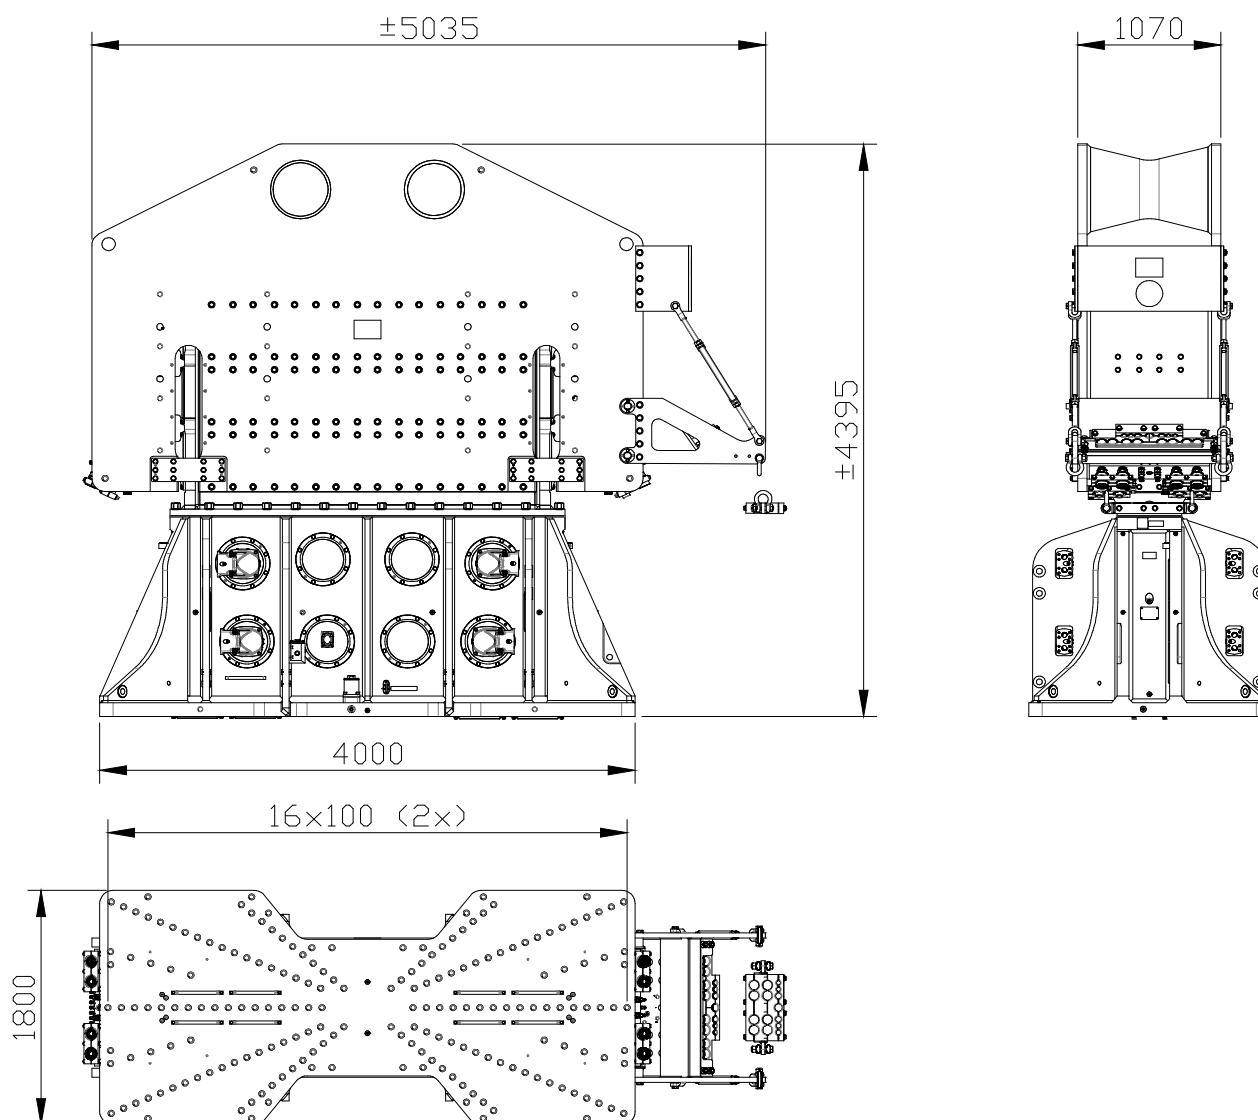

Spécifications

ICE 300NF


Moment excentrique	300 kgm	Pincés:	
Max. force centrifuge	6150 kN	Pince tube	210TC (4x)
Max. fréquence	1400 rpm	Poids de transport par pièce	1600 kg
Max. amplitude sans 210TC (4x)	21 mm		
Max. amplitude avec 210TC (4x)	17 mm		
Force de traction statique	4000 kN		
Pression de travail max.	350 bar	Groupe hydraulique:	
Débit d'huile max.	2800 l/min	Modèle	3200 series
Huile lubrifiante	oui		
Poids dynamique sans 210TC (4x)	27250 kg	Jeu de tuyau:	
Poids dynamique avec 210TC (4x)	33650 kg	Longueur	60 m
Poids total sans 210TC (4x) & tuyaux	47000 kg	Poids de transport (±)	5200 kg

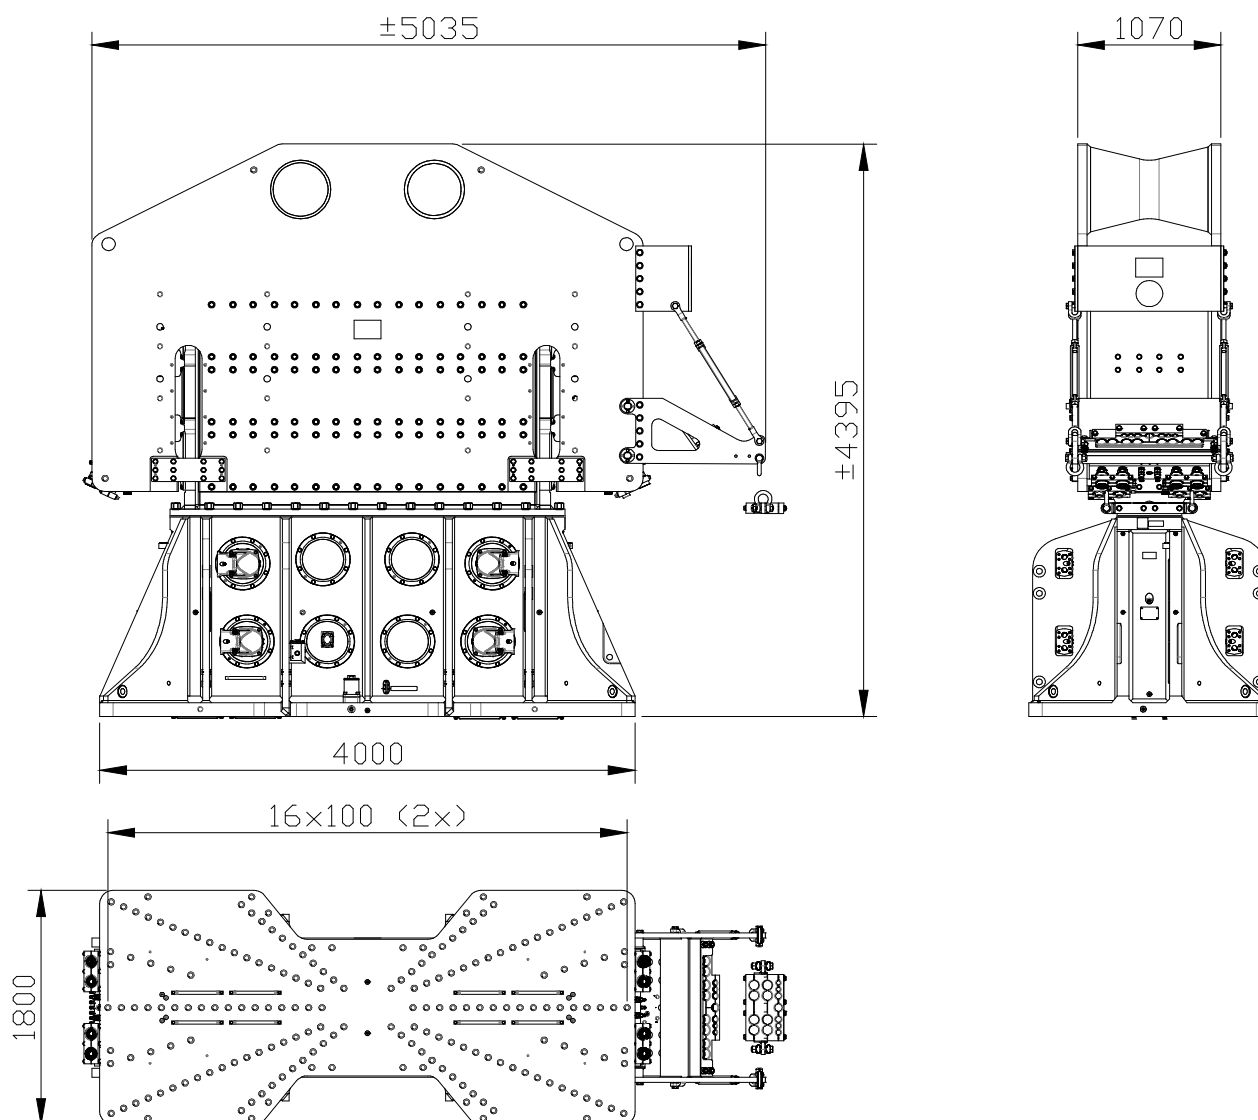


Specificaties

ICE 300NF

Excentrisch moment	300 kgm	Klemmen:	
Max. centrifugaalkracht	6150 kN	Pijpenklem	210TC (4x)
Max. toerental	1400 rpm	Transportgewicht per klem	1600 kg
Max. amplitude excl. 210TC (4x)	21 mm		
Max. amplitude incl. 210TC (4x)	17 mm		
Max. statische trekkracht	4000 kN		
Max. werkdruk	350 bar	Aggregaat:	
Max. oliedoorstroming	2800 l/min	Model	3200 series
Geforceerde smering	ja		
Dynamisch gewicht excl. 210TC (4x)	27250 kg	Slangenset:	
Dynamisch gewicht incl. 210TC (4x)	33650 kg	Lengte	60 m
Totaalgewicht excl. 210TC (4x) & slangen	47000 kg	Transportgewicht (±)	5200 kg

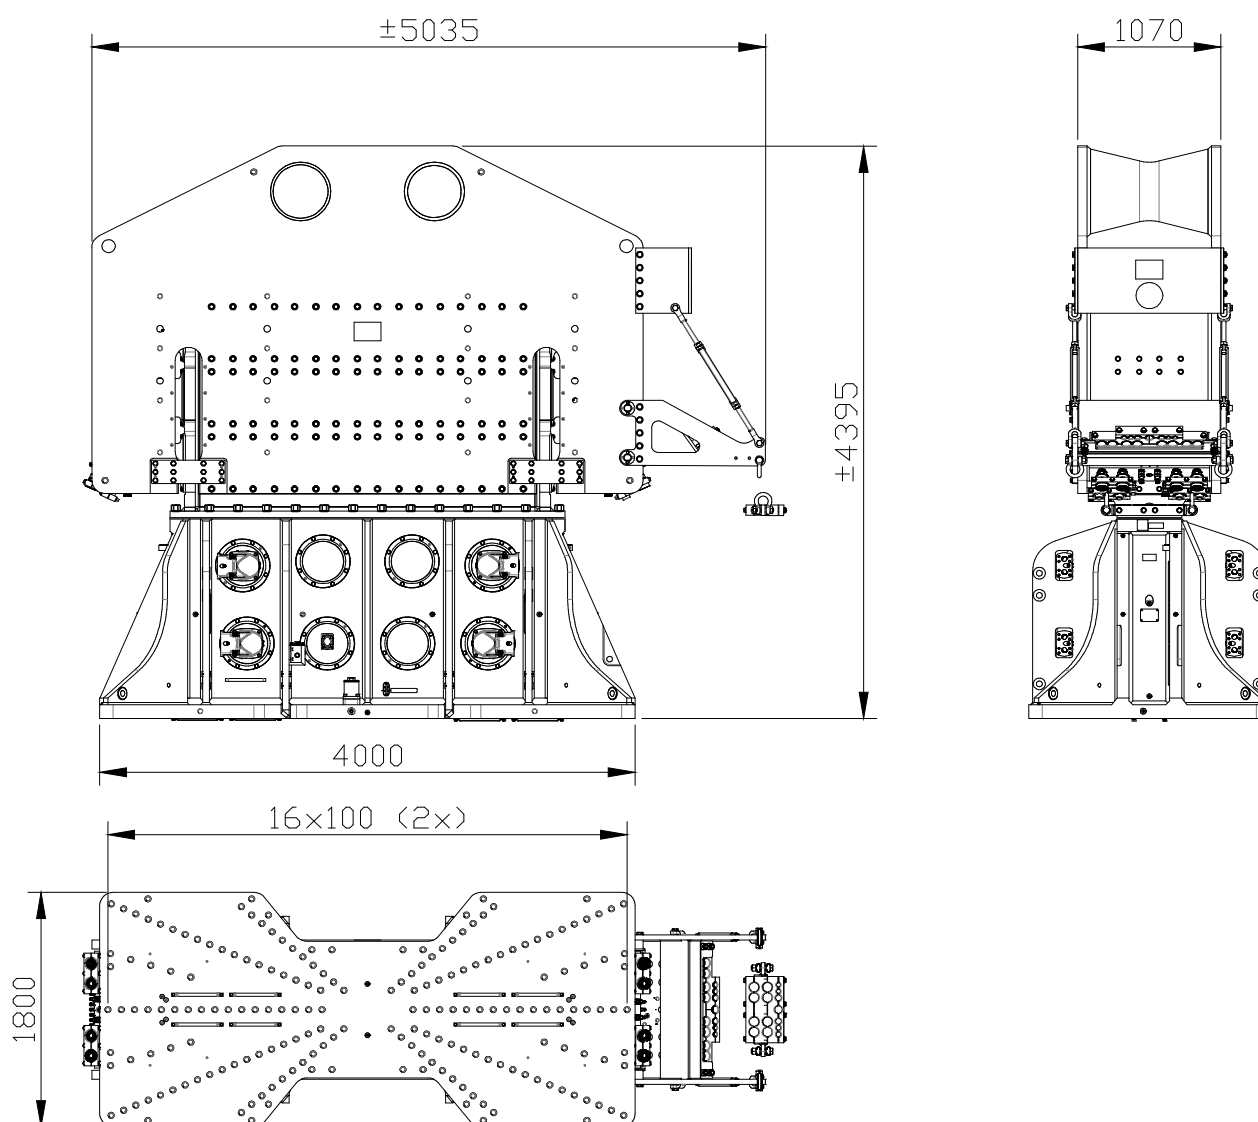
Specificatii
ICE 300NF

Moment excentric	300 kgm	Menghina:	
Forta centrifuga maxima	6150 kN	Menghina dubla	210TC (4x)
Frecventa maxima	1400 rpm	Greutatea transportului pe buc.	1600 kg
Amplitudinea maxima excluzand 210TC (4x)	21 mm		
Amplitudinea maxima inclusiv 210TC (4x)	17 mm		
Tractiune statica maxima	4000 kN		
Presiunea maxima de lucru	350 bar	Unitate de putere:	
Debit maxim de ulei	2800 l/min	Model	3200 series
Ungere fortata	da		
Greutate dinamica excluzand 210TC (4x)	27250 kg	Set furtun:	
Greutate dinamica inclusiv 210TC (4x)	33650 kg	Lungime	60 m
Greutate totala excl. 210TC (4x) & furtunuri	47000 kg	Greutatea transportului (±)	5200 kg

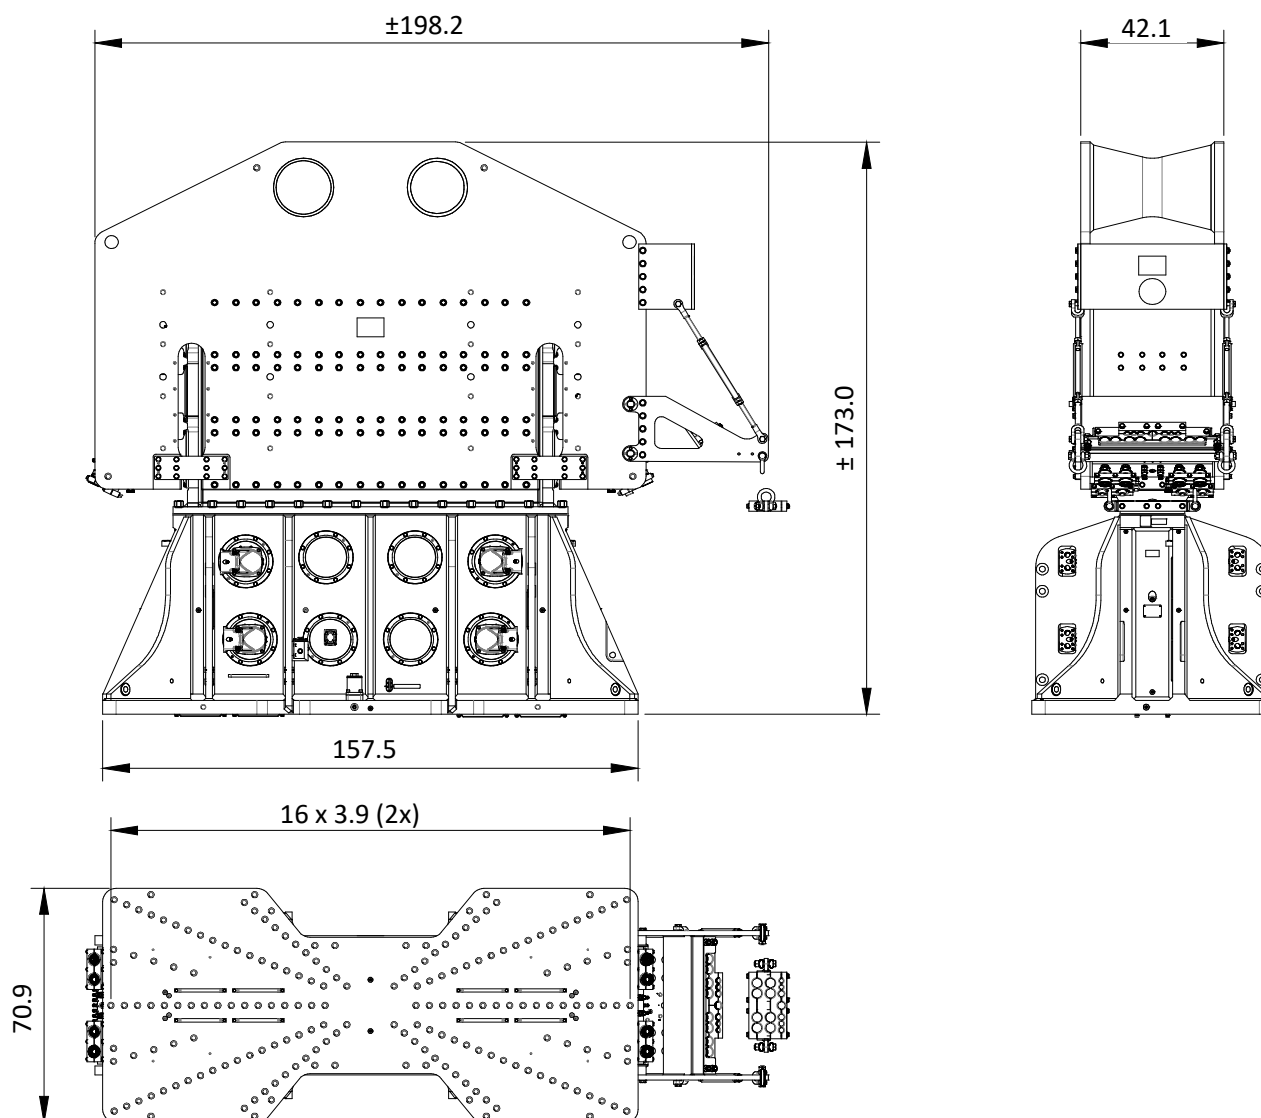

Specifications

ICE 300NF

Eccentric moment	0-26041.7 lbs in	Clamps:	
Max. centrifugal force	0-691.3 US tn	Double clamps	210TC (4x)
Max. frequency	1400 rpm	Transport weight per piece	3527 lbs
Max. amplitude excluding 210TC (4x)	0.83 in		
Max. amplitude including 210TC (4x)	0.67 in		
Max. static line-pull	407.9 US tn		
Max. operating pressure	5076 psi	Powerpack:	
Max. oil flow	740 gal/min	Model	3200 series
Forced lubrication	yes		
Dynamic weight excluding 210TC (4x)	60076 lbs	Hose set:	
Dynamic weight including 210TC (4x)	74186 lbs	Length	197 ft
Total weight excluding 210TC (4x) & hoses	1E+05 lbs	Transport weight (±)	11464 lbs