



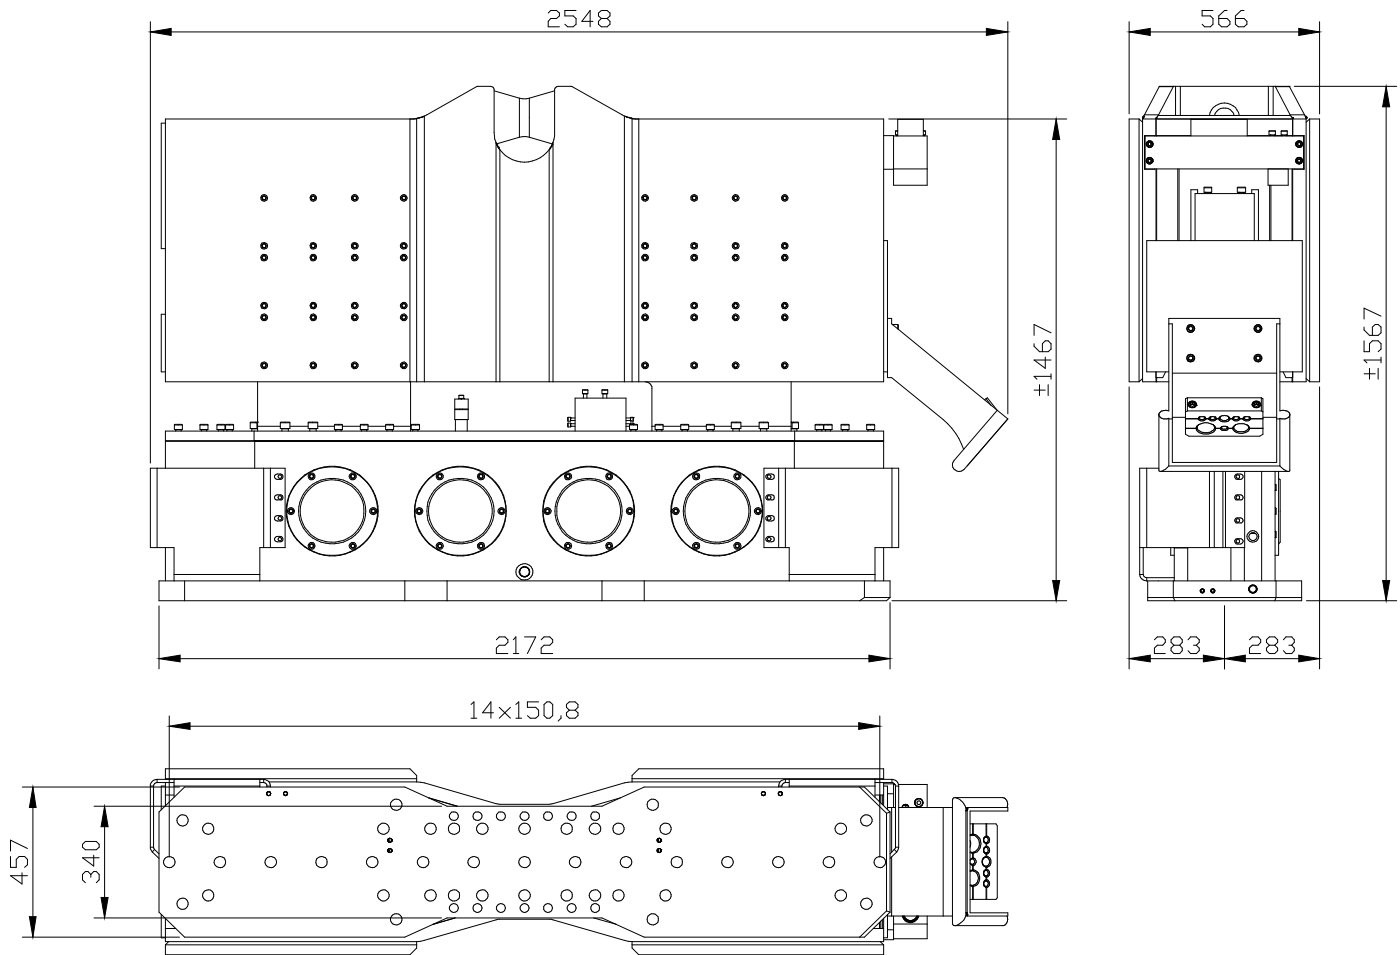

Specifications :

ICE 32NF


Eccentric moment	32 kgm	Clamps:	
Max. centrifugal force	955 kN	Sheet pile clamp	130TU
Max. frequency	1650 rpm	Transport weight per piece	610 kg
Max. amplitude excl. 130TU	27.2 mm	Double clamps	81TC
Max. amplitude incl. 130TU	21.6 mm	Transport weight per piece	480 kg
Max. static line-pull	400 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	370 l/min	Model	400 series
Forced lubrication	no		
Dynamic weight excl. 130TU	2350 kg	Hose set:	
Dynamic weight incl. 130TU	2960 kg	Length	30 m
Total weight excl. 130TU & hoses	4600 kg	Transport weight (±)	370 kg

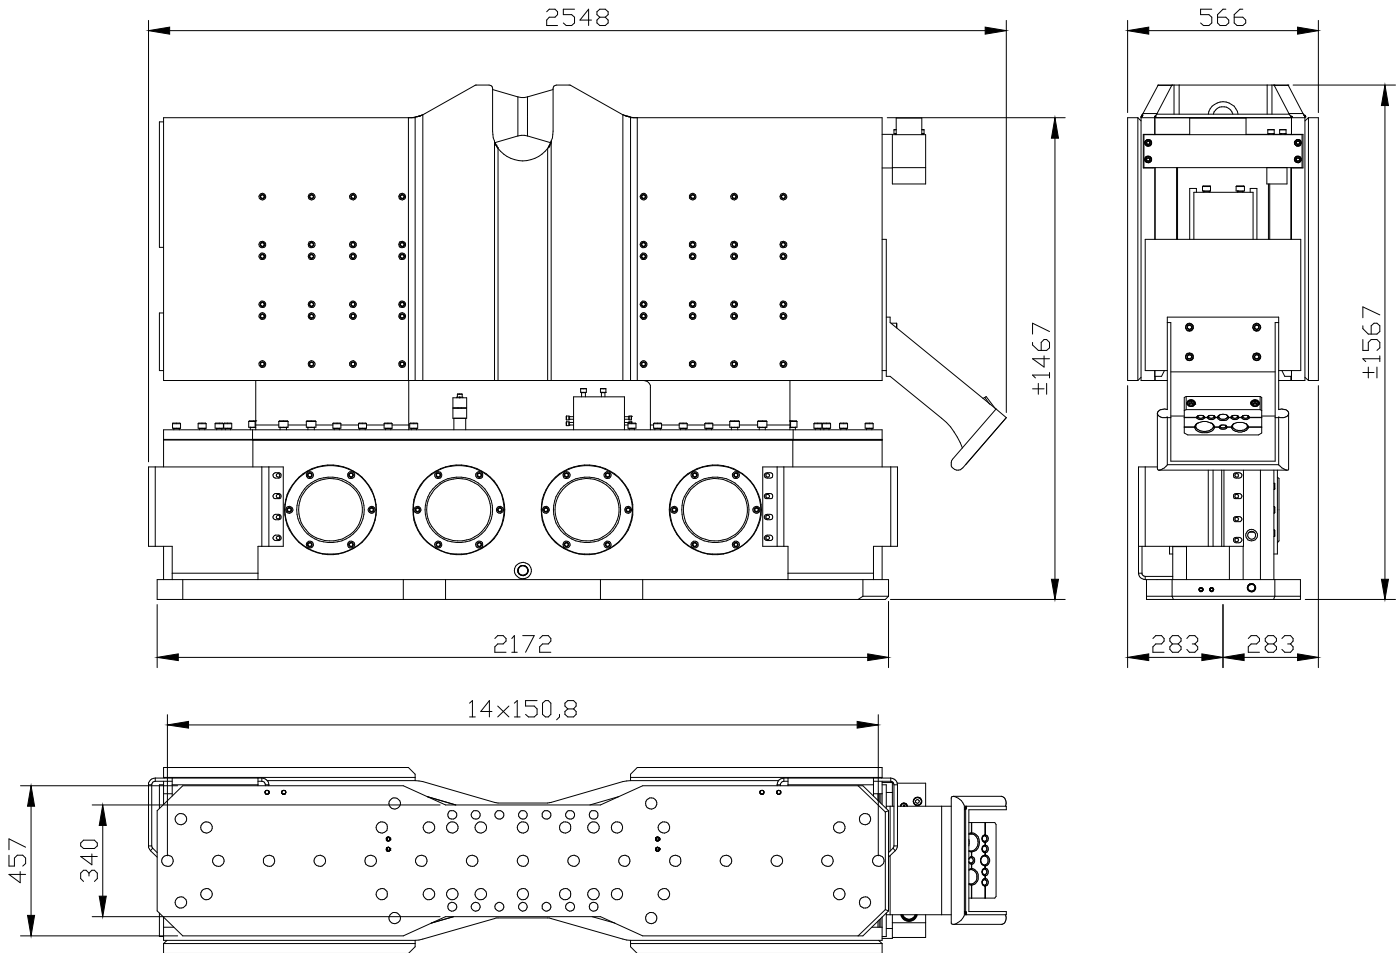

Technische Daten :

ICE 32NF


Statisches Moment	32 kgm	Klemmzange:	
Max. Fliehkraft	955 kN	Universalzange	130TU
Max. Drehzahl	1650 rpm	Transportgew. pro Stück	610 kg
Max. Amplitude ohne 130TU	27.2 mm	Rohrklemmzange	81TC
Max. Amplitude mit 130TU	21.6 mm	Transportgew. pro Stück	480 kg
Max. Statische Zugkraft	400 kN		
Max. Betriebsdruck	350 bar	Aggregat:	
Max. Fördermenge	370 l/min	Modell	400 series
Zwangsschmierung	nein		
Dyn. Gewicht ohne 130TU	2350 kg	Schlauchsatz:	
Dyn. Gewicht mit 130TU	2960 kg	Länge	30 m
Gesamtgew. ohne 130TU & Schläuche	4600 kg	Transportgewicht (±)	370 kg

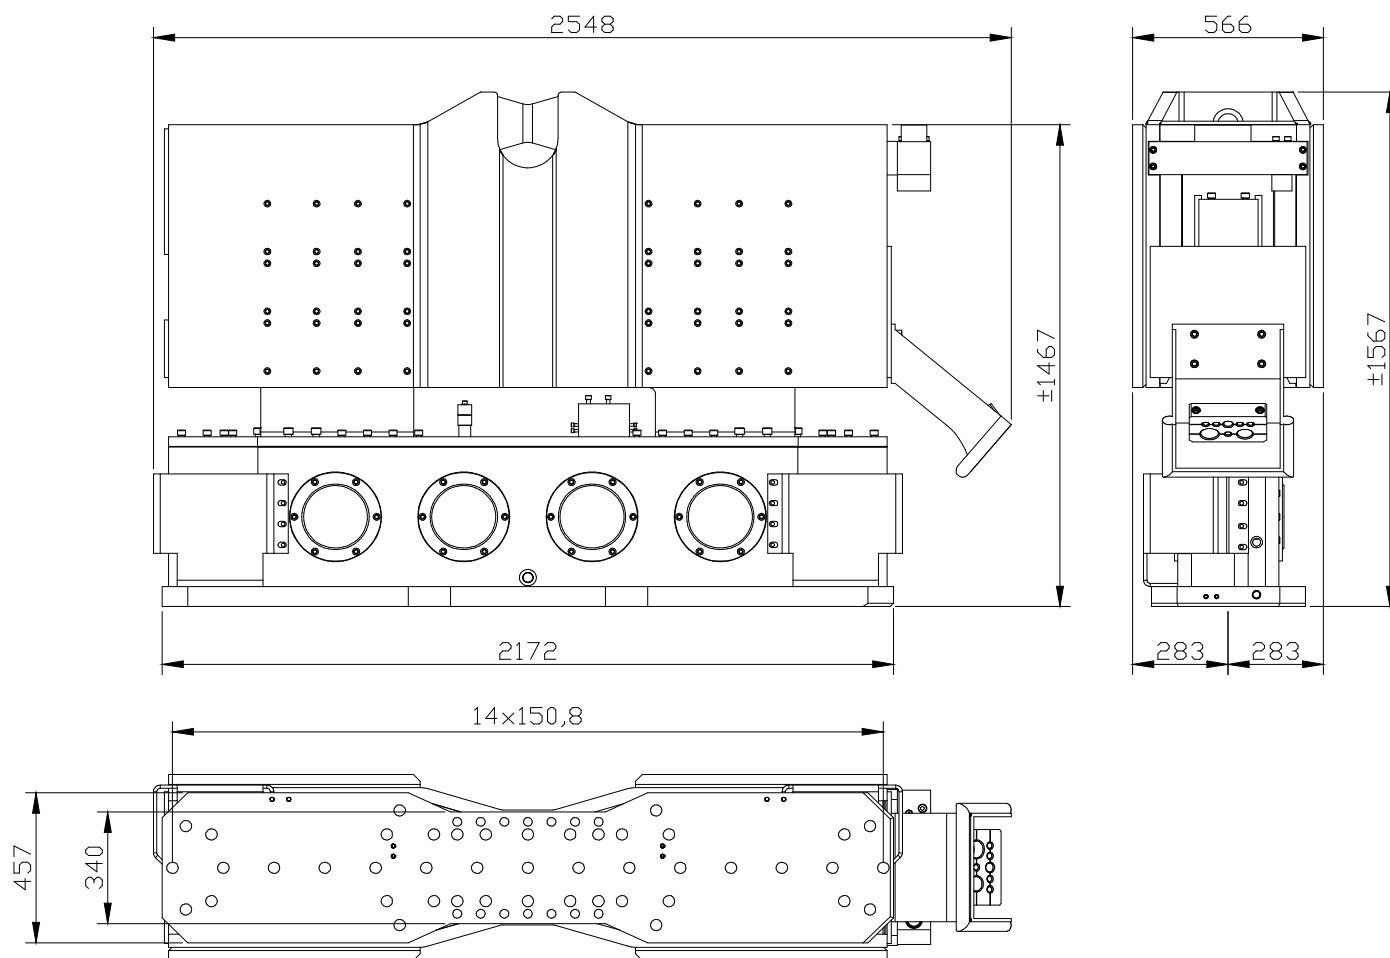

Spécifications

ICE 32NF


Moment excentrique	32 kgm	Pincas:	
Max. force centrifuge	955 kN	Pince palplanche	130TU
Max. fréquence	1650 rpm	Poids de transport par pièce	610 kg
Max. amplitude sans 130TU	27.2 mm	Pince tube	81TC
Max. amplitude avec 130TU	21.6 mm	Poids de transport par pièce	480 kg
Force de traction statique	400 kN		
Pression de travail max.	350 bar	Groupe hydraulique:	
Débit d'huile max.	370 l/min	Modèle	400 series
Huile lubrifiante	no		
Poids dynamique sans 130TU	2350 kg	Jeu de tuyau:	
Poids dynamique avec 130TU	2960 kg	Longueur	30 m
Poids total sans 130TU & tuyaux	4600 kg	Poids de transport (±)	370 kg

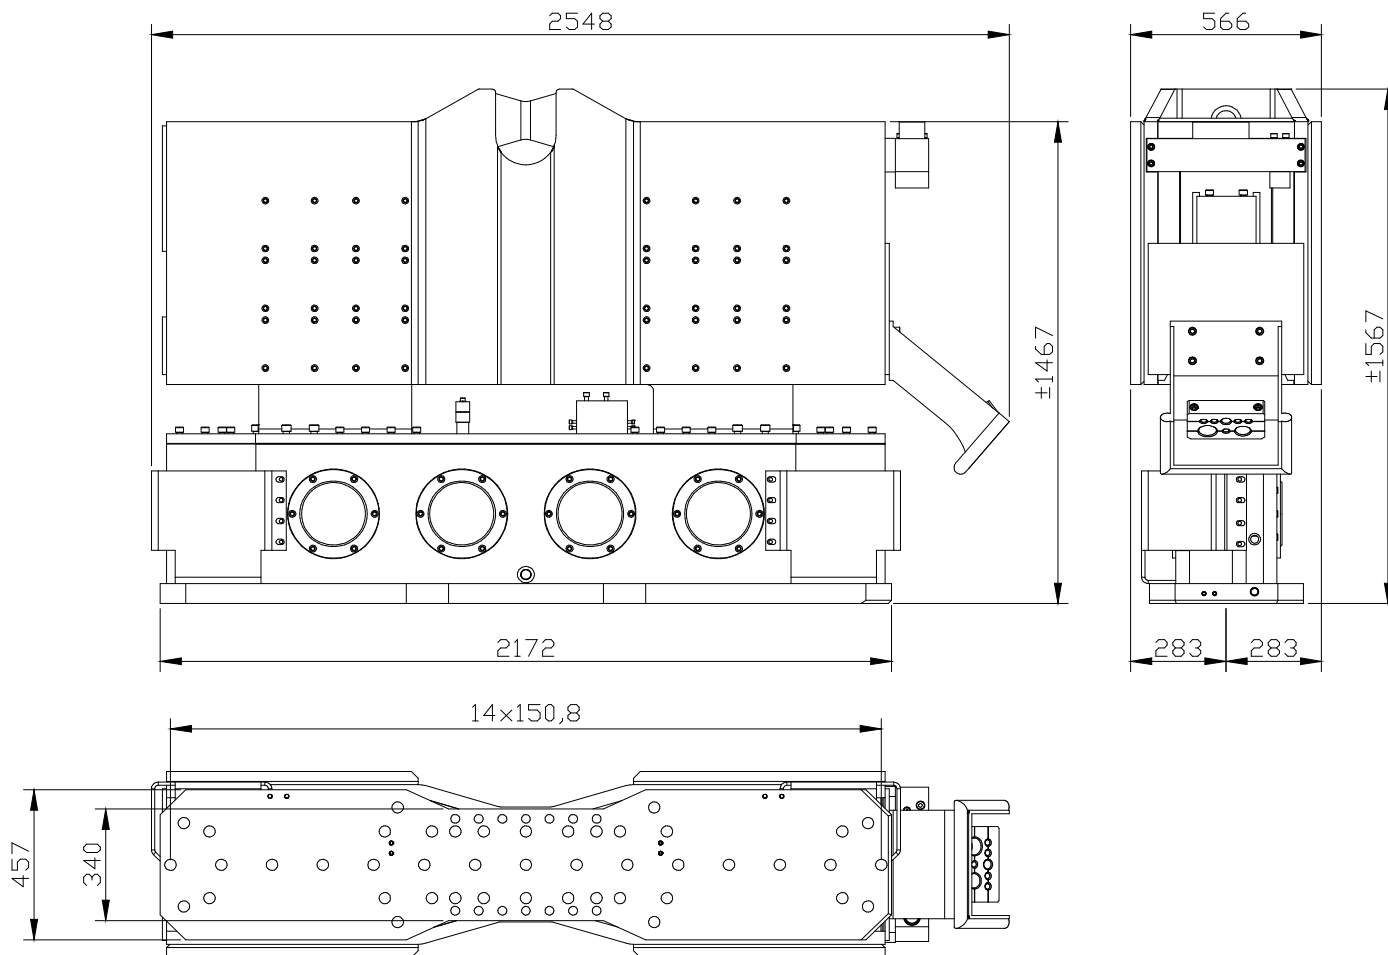

Specificaties

ICE 32NF


Excentrisch moment	32 kgm	Klemmen:	
Max. centrifugaalkracht	955 kN	Damwandklem	130TU
Max. toerental	1650 rpm	Transportgewicht per klem	610 kg
Max. amplitude excl. 130TU	27.2 mm	Pijpenklem	81TC
Max. amplitude incl. 130TU	21.6 mm	Transportgewicht per klem	480 kg
Max. statische trekkracht	400 kN		
Max. werkdruk	350 bar	Aggregaat:	
Max. oliedoorstroming	370 l/min	Model	400 series
Geforceerde smering	nee		
Dynamisch gewicht excl. 130TU	2350 kg	Slangenset:	
Dynamisch gewicht incl. 130TU	2960 kg	Lengte	30 m
Totaalgewicht excl. 130TU & slangen	4600 kg	Transportgewicht (±)	370 kg

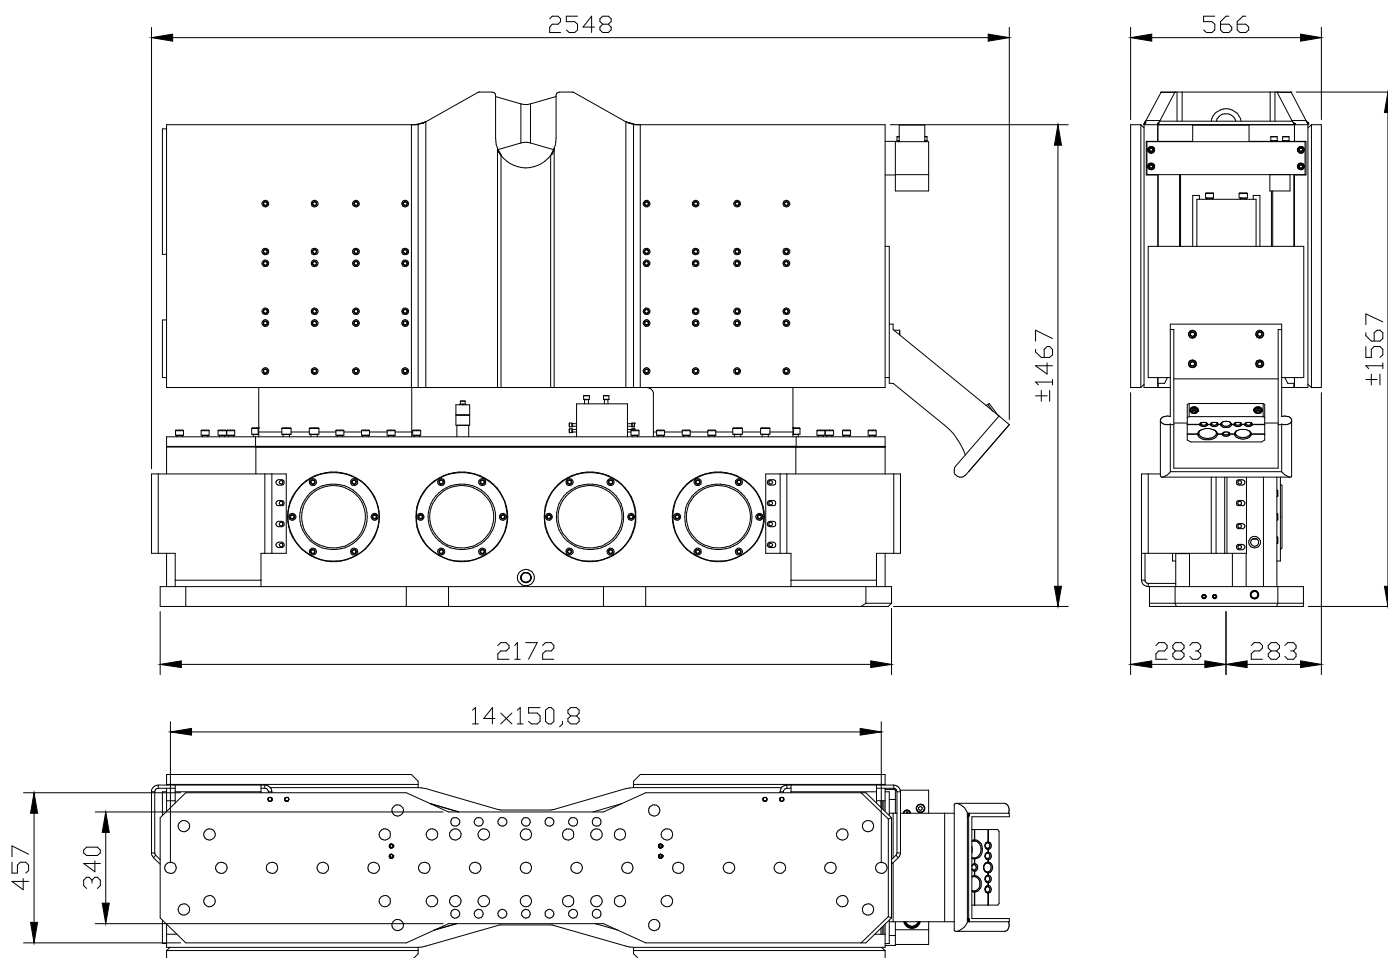

Specificatii

ICE 32NF

Moment excentric	32 kgm	Menghina:	
Forta centrifuga maxima	955 kN	Menghina pentru palplanse	130TU
Frecventa maxima	1650 rpm	Greutatea transportului pe buc.	610 kg
Amplitudinea maxima excluzand 130TU	27.2 mm	Menghina dubla	81TC
Amplitudinea maxima inclusiv 130TU	21.6 mm	Greutatea transportului pe buc.	480 kg
Tractiune statica maxima	400 kN	Unitate de putere:	
Presiunea maxima de lucru	350 bar	Model	400 series
Debit maxim de ulei	370 l/min	Set furtun:	
Ungere fortata	nu	Lungime	30 m
Greutate dinamica excluzand 130TU	2350 kg	Greutatea transportului (±)	370 kg
Greutate dinamica inclusiv 130TU	2960 kg		
Greutate totala excl. 130TU & furtunuri	4600 kg		

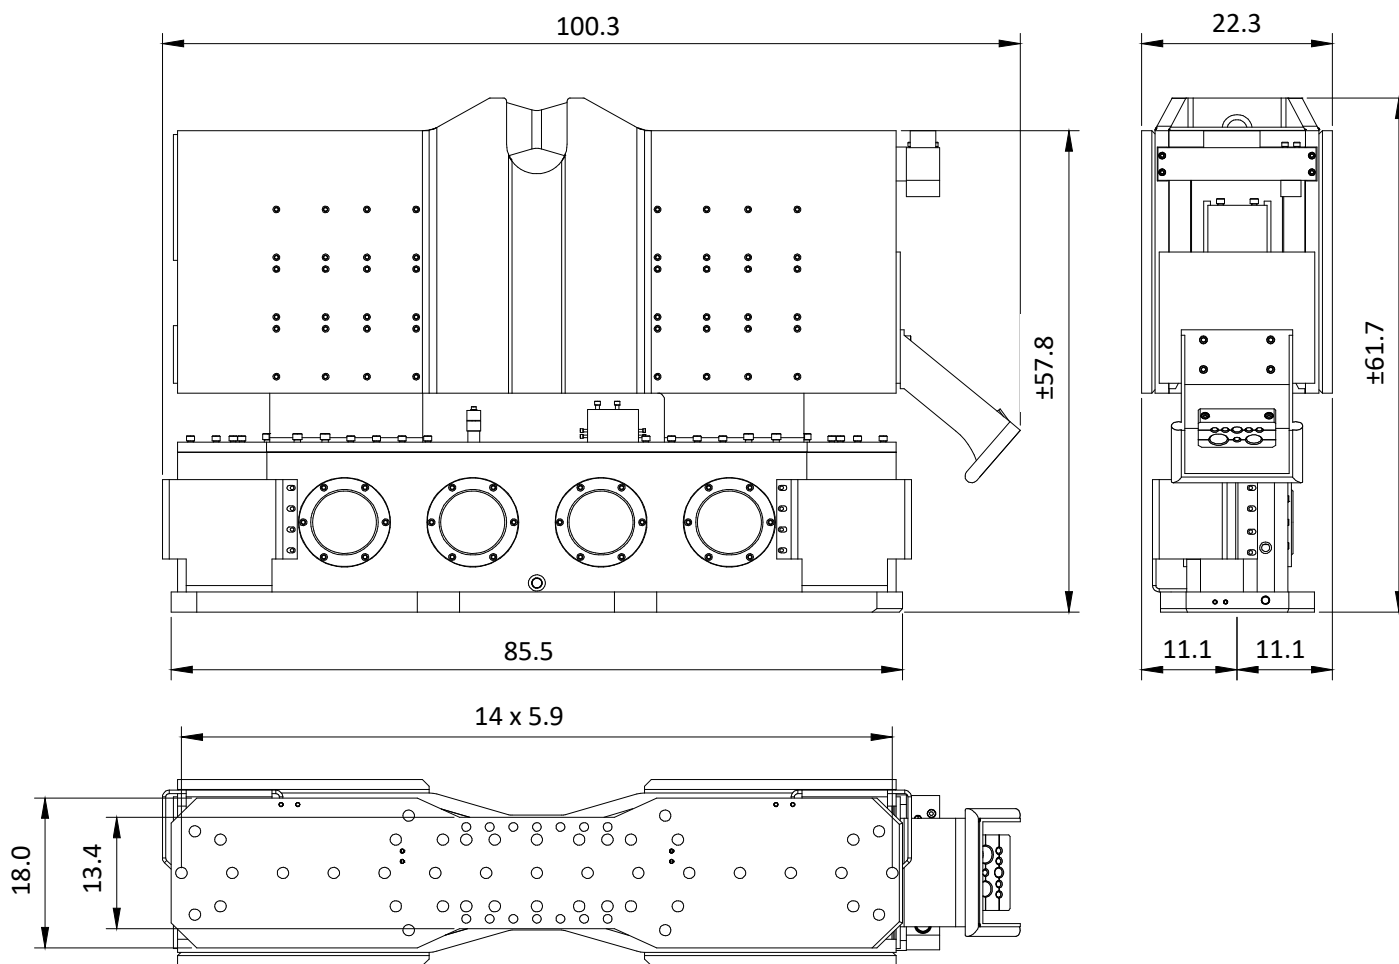

Specifications

ICE 32NF

Eccentric moment	0-2777.8 lbs in	Clamps:	
Max. centrifugal force	0-107.4 US tn	Sheet pile clamp	130TU
Max. frequency	1650 rpm	Transport weight per piece	1345 lbs
Max. amplitude excluding 130TU	1.07 in	Double clamps	81TC
Max. amplitude including 130TU	0.85 in	Transport weight per piece	1058 lbs
Max. static line-pull	40.8 US tn		
Max. operating pressure	5076 psi	Powerpack:	
Max. oil flow	98 gal/min	Model	400 series
Forced lubrication	no		
Dynamic weight excluding 130TU	5181 lbs	Hose set:	
Dynamic weight including 130TU	6526 lbs	Length	98 ft
Total weight excluding 130TU & hoses	10141 lbs	Transport weight (±)	816 lbs