
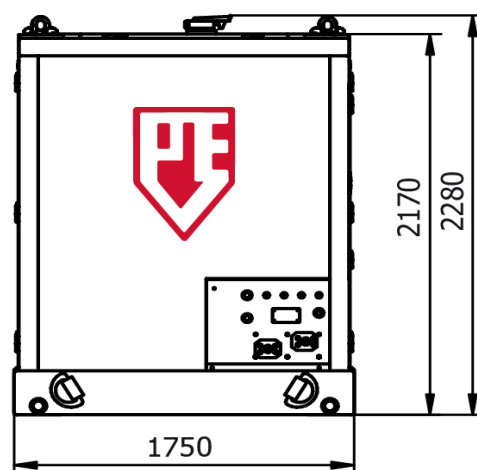
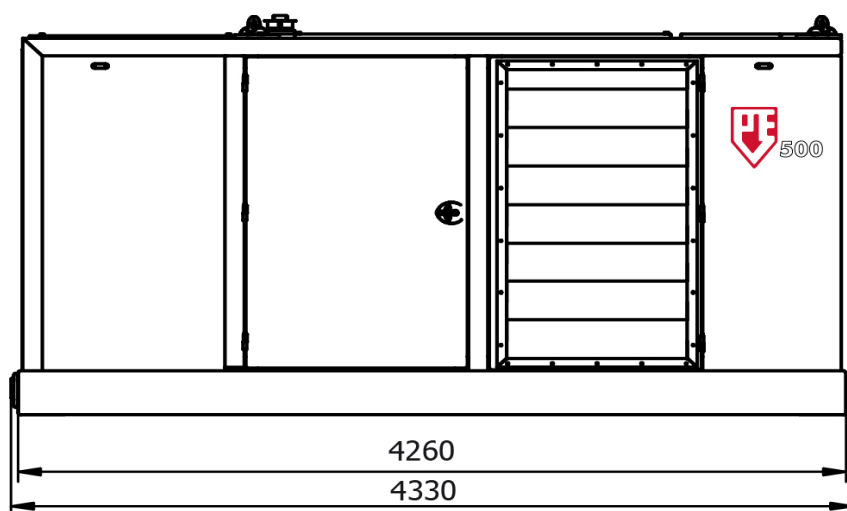


Specification sheet

PVE 500 STAGE IIIA / TIER 3

Hydraulic Power Pack

English

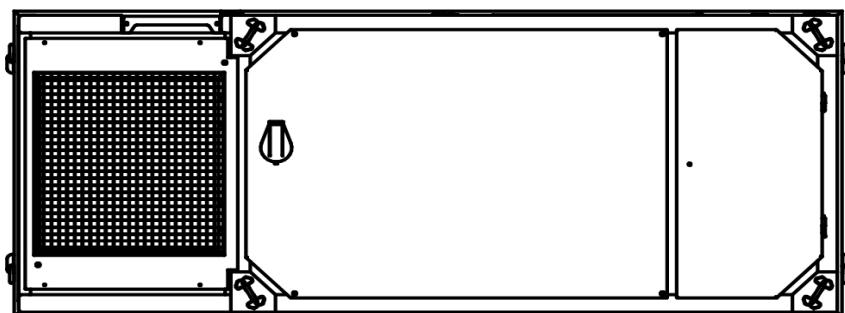

Specifications :

PVE 500 STAGE IIIA / TIER 3




Diesel Engine	Volvo TAD 1352 GE	
Max. theoretical power	363/494	kW/HP
Max. frequency	1800	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	520	L/min
Diesel oil	790	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	1345	L
Weight without fuel	6800	kg
Weight filled up	7500	kg



Technische Daten PVE 500 STAGE IIIA / TIER 3

Aggregat

Deutsch

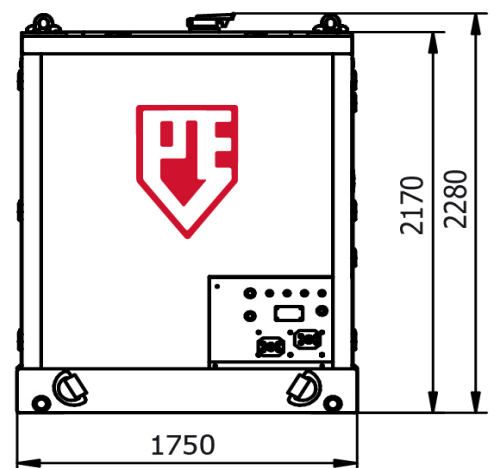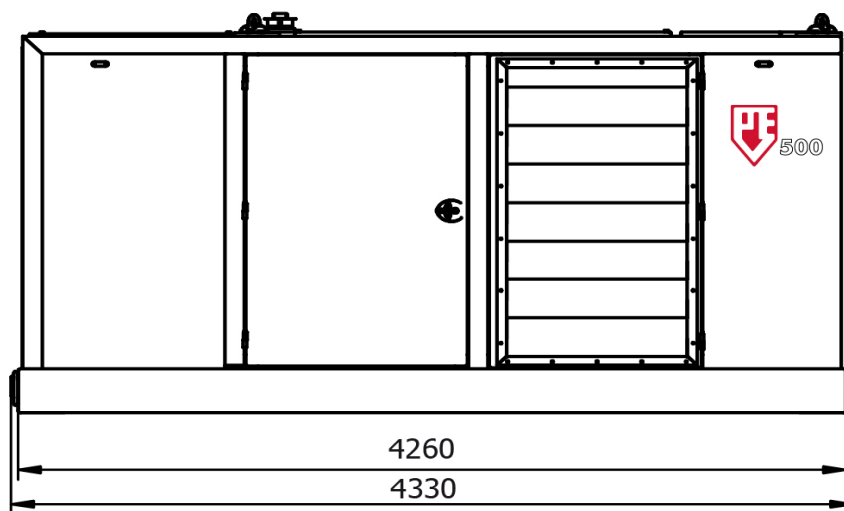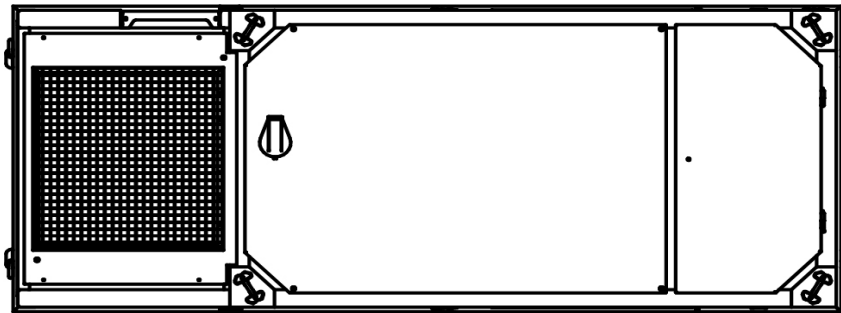

Technische Daten :

PVE 500 STAGE IIIA / TIER 3




Dieselmotor	Volvo TAD 1352 GE	
Max. theoretische Leistung	363/494	kW/HP
Max. Drehzahl	1800	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	520	L/min
Diesel Öl	790	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	1345	L
Gewicht ohne Diesel Öl	6800	kg
Gewicht	7500	kg

Spécifications

PVE 500 STAGE IIIA / TIER 3

Groupe hydraulique

Français

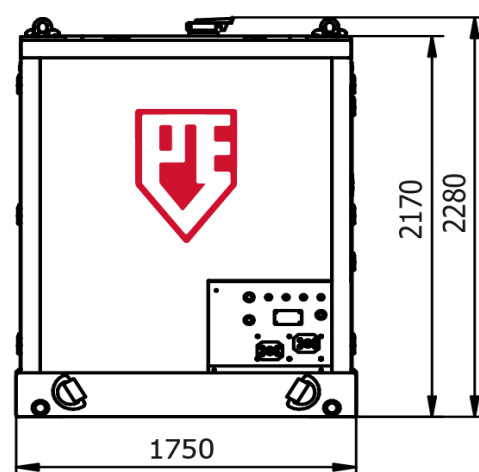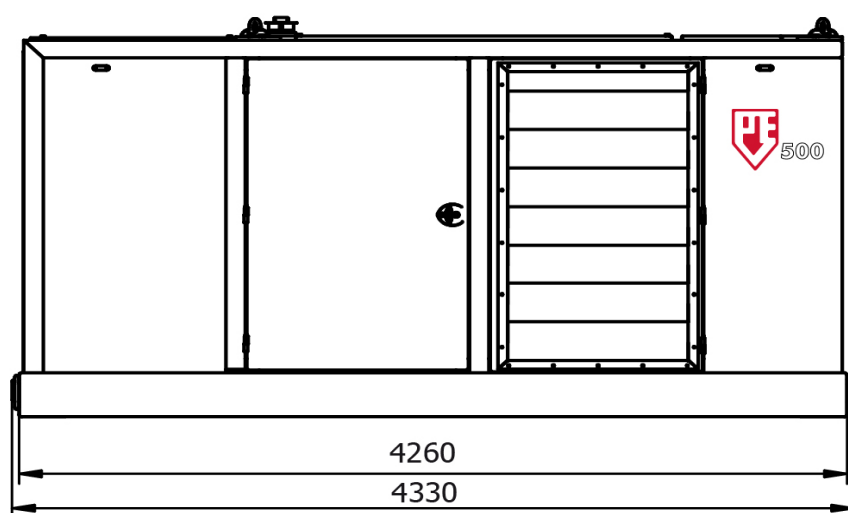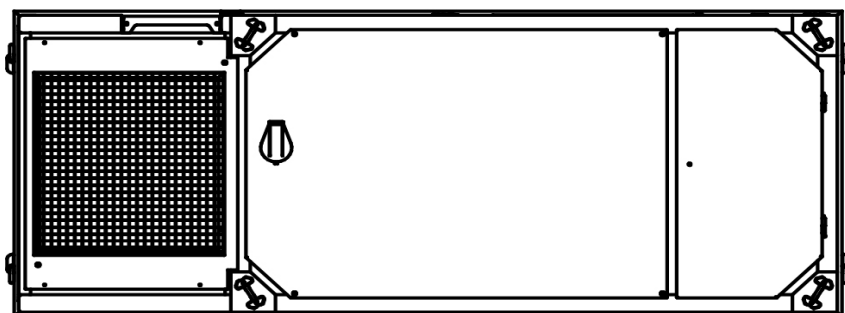

Spécifications

PVE 500 STAGE IIIA / TIER 3

Moteur Diesel	Volvo TAD 1352 GE	
Puissance théorique max.	363/494	kW/HP
Max. fréquence	1800	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	520	L/min
Huile diesel	790	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	1345	L
Poids sans huile diesel	6800	kg
Poids	7500	kg






Specificaties

PVE 500 STAGE IIIA / TIER 3

Hydraulisch aggregaat

Nederlands

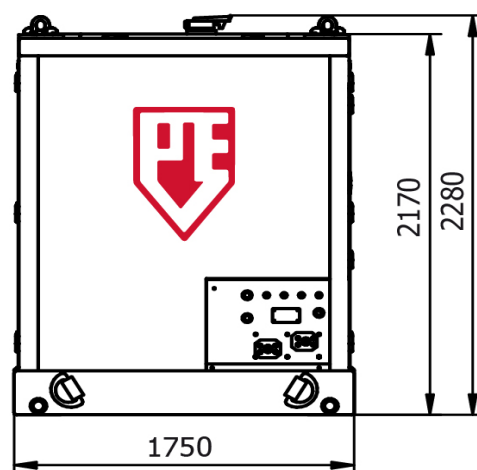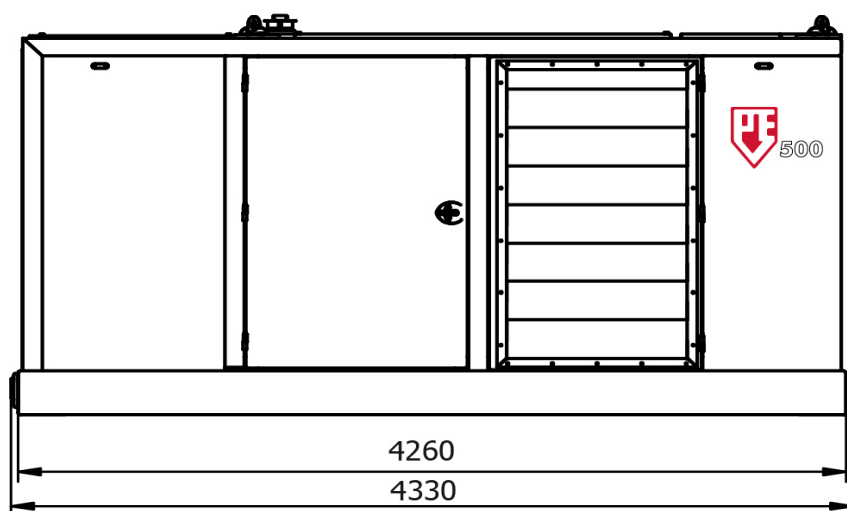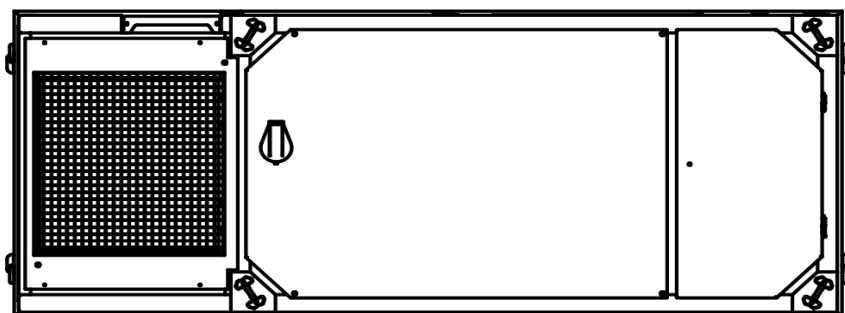

Specificaties




PVE 500 STAGE IIIA / TIER 3

Dieselmotor	Volvo TAD 1352 GE	
Max. theoretisch vermogen	363/494	kW/HP
Max. toerental	1800	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	520	L/min
Diesel olie	790	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	1345	L
Gewicht zonder diesel	6800	kg
Gewicht	7500	kg

Especificaciones PVE 500 STAGE IIIA / TIER 3

Unidad de potencia

Español

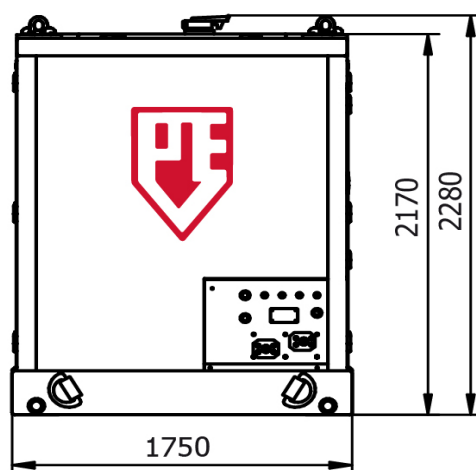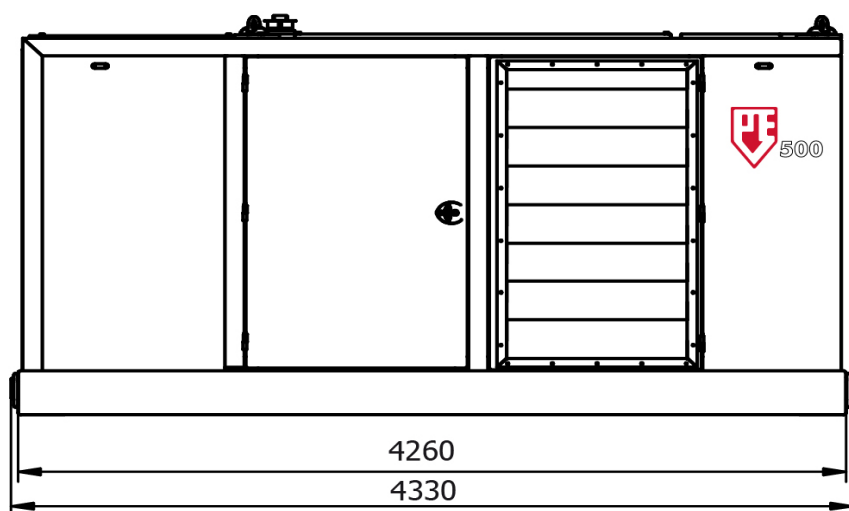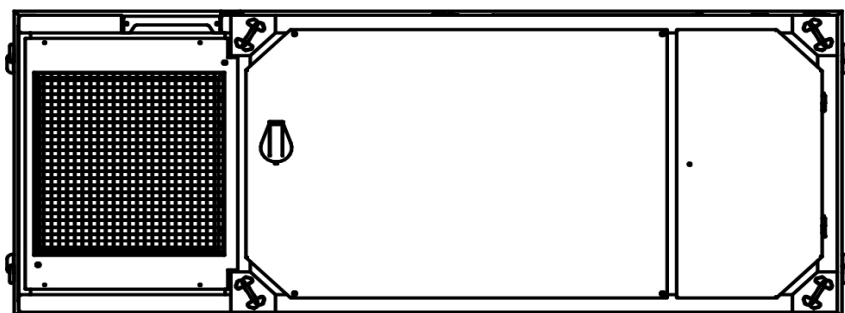

Especificaciones

PVE 500 STAGE IIIA / TIER 3

Motor de diesel	Volvo TAD 1352 GE	
Potencia Máxima teórica	363/494	kW/HP
Frecuencia máxima	1800	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	520	L/min
Gasóleo	790	L
Capacidad DEF (AdBlue)	N.A.	L
El aceite hidráulico	1345	L
Peso sin gasóleo	6800	kg
Peso	7500	kg






Specifications

PVE 500 STAGE IIIA / TIER 3

Hydraulic Power Pack

USA

Dimensions in inches

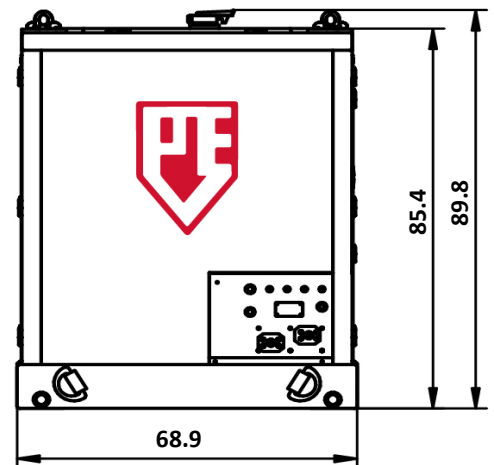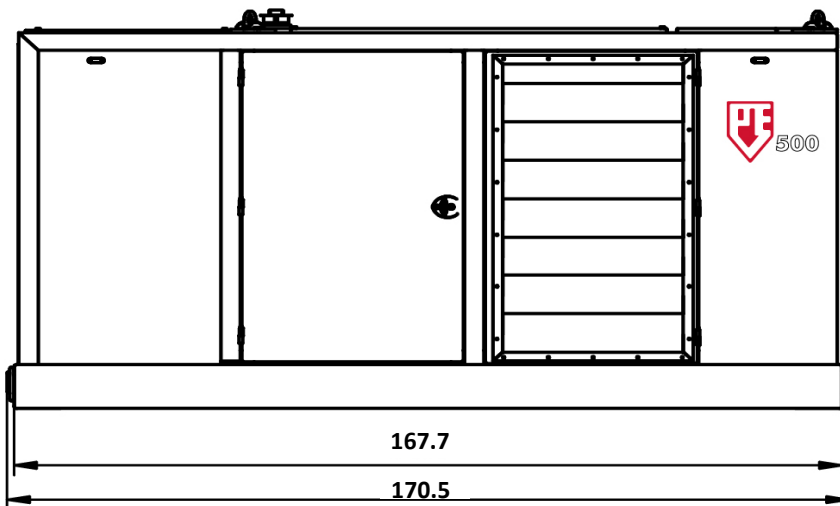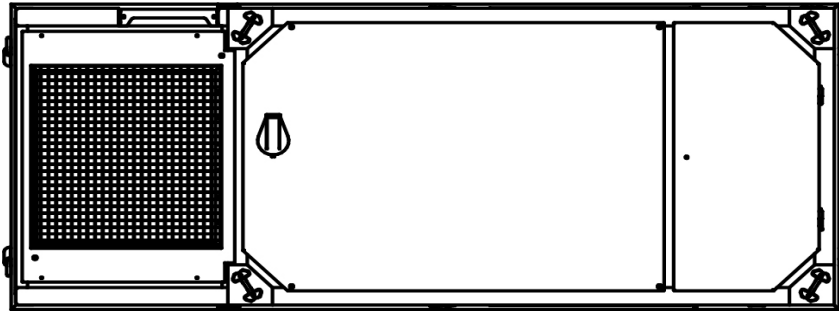

Specifications

PVE 500 STAGE IIIA / TIER 3

Diesel Engine	Volvo TAD 1352 GE	
Max. theoretical power	363/494	kW/HP
Max. frequency	1,800	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	137	gal/min
Diesel Fuel	209	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	355	gal
Weight without fuel	14,991	lbs
Weight with fuel	16,535	lbs