






Specification sheet

PVE 500 STAGE IV / TIER 4F

Hydraulic Power Pack

English

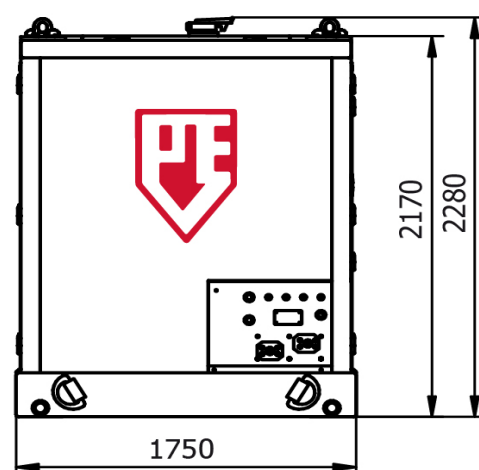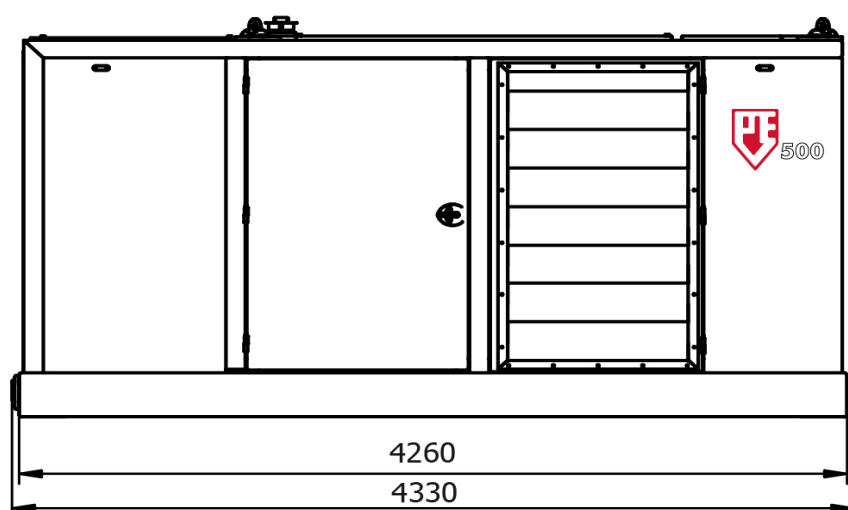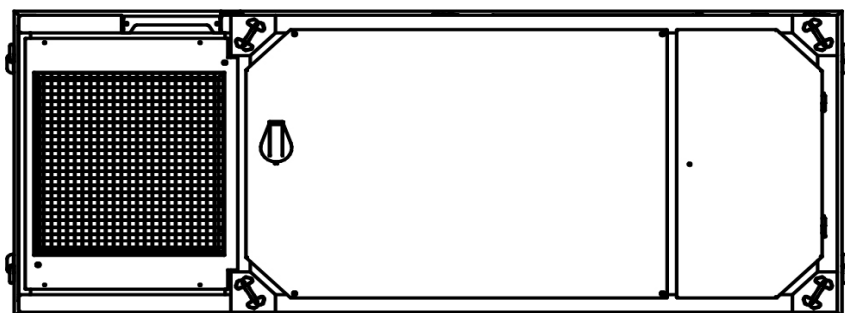

Specifications :

PVE 500 STAGE IV / TIER 4F




Diesel Engine	Volvo TAD 1374 VE	
Max. theoretical power	375/510	kW/HP
Max. frequency	1900	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	520	L/min
Diesel oil	790	L
DEF (AdBlue) capacity	45	L
Hydraulic oil	1345	L
Weight without fuel	6800	kg
Weight filled up	7500	kg



Technische Daten PVE 500 STAGE IV / TIER 4F

Aggregat

Deutsch

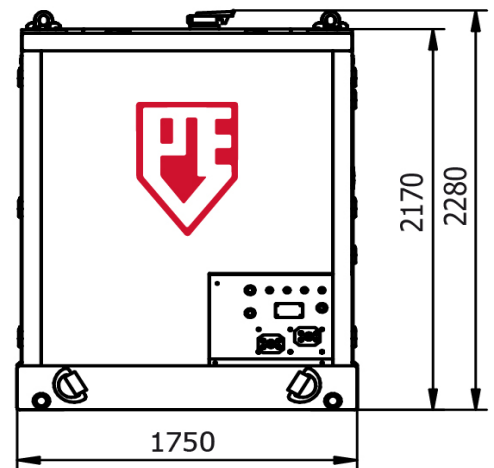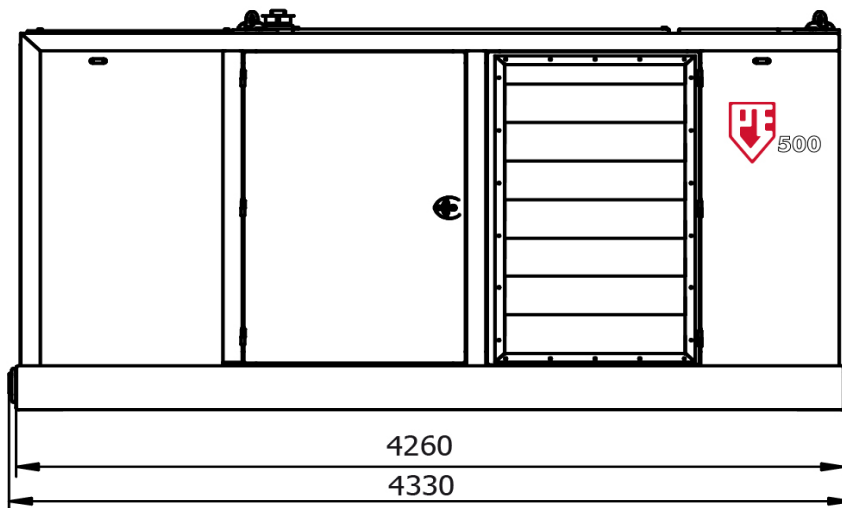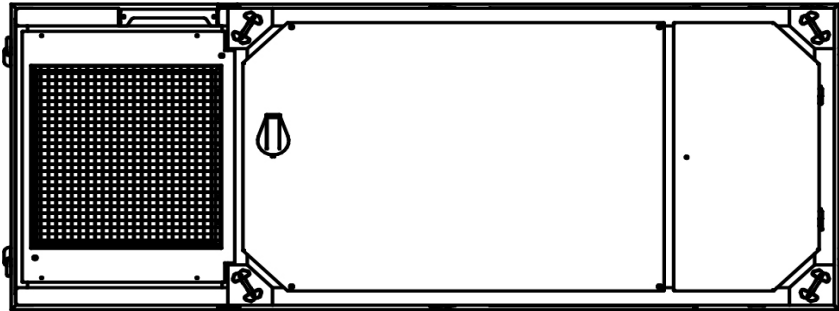

Technische Daten :

PVE 500 STAGE IV / TIER 4F




Dieselmotor	Volvo TAD 1374 VE	
Max. theoretische Leistung	375/510	kW/HP
Max. Drehzahl	1900	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	520	L/min
Diesel Öl	790	L
DAF (AdBlue) kapazität	45	L
Hydraulische Öl	1345	L
Gewicht ohne Diesel Öl	6800	kg
Gewicht	7500	kg

Spécifications

PVE 500 STAGE IV / TIER 4F

Groupe hydraulique

Français

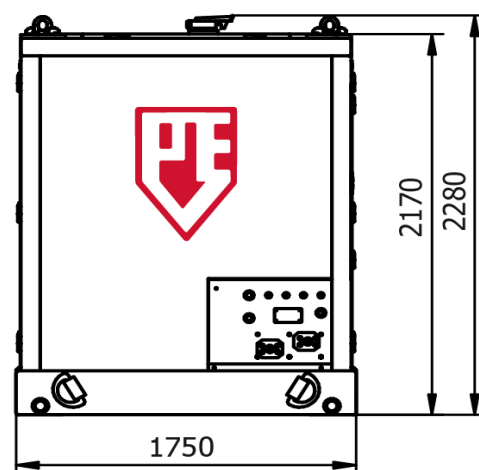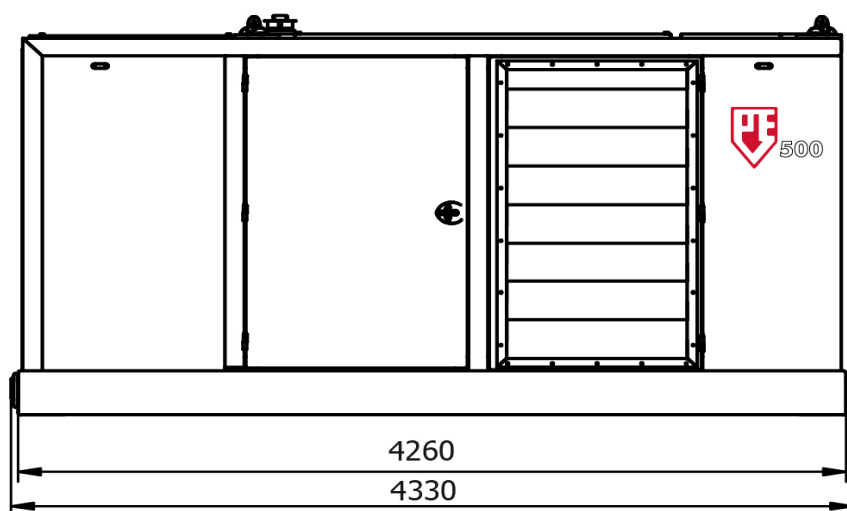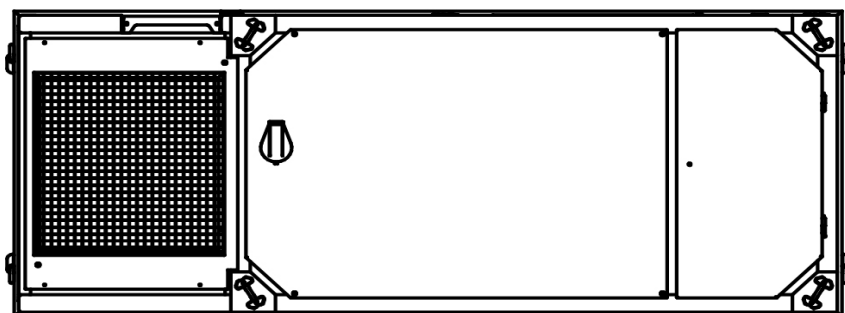

Spécifications

PVE 500 STAGE IV / TIER 4F

Moteur Diesel	Volvo TAD 1374 VE	
Puissance théorique max.	375/510	kW/HP
Max. fréquence	1900	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	520	L/min
Huile diesel	790	L
Capacité FED (AdBlue)	45	L
Huile hydraulique	1345	L
Poids sans huile diesel	6800	kg
Poids	7500	kg






Specificaties

PVE 500 STAGE IV / TIER 4F

Hydraulisch aggregaat

Nederlands

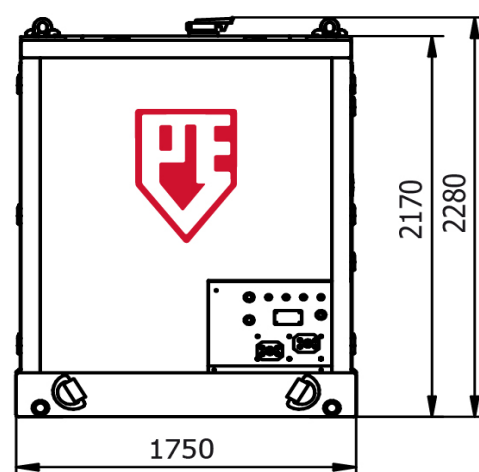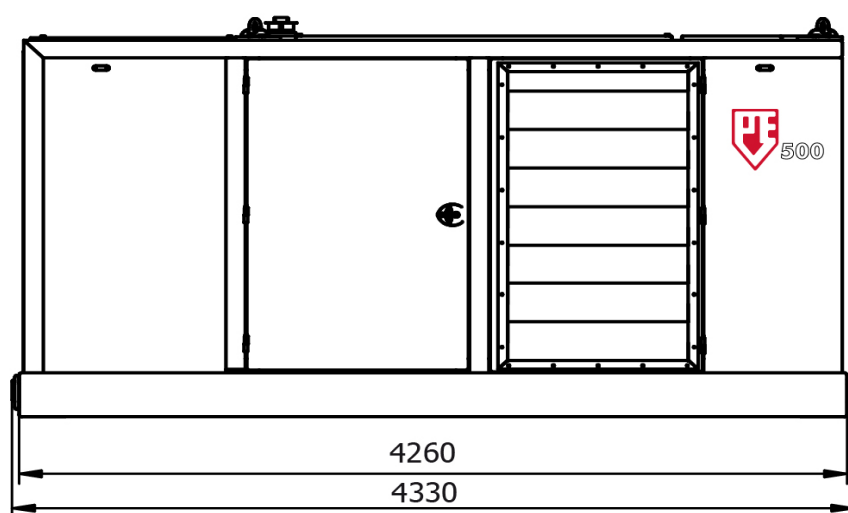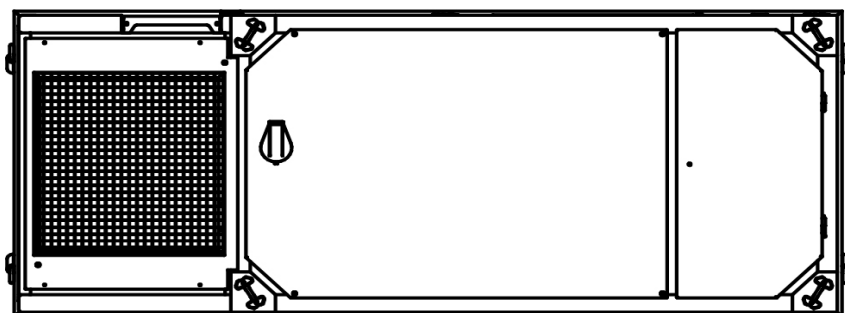

Specificaties

PVE 500 STAGE IV / TIER 4F




Dieselmotor	Volvo TAD 1374 VE	
Max. theoretisch vermogen	375/510	kW/HP
Max. toerental	1900	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	520	L/min
Diesel olie	790	L
DEF (AdBlue) capaciteit	45	L
Hydraulische olie	1345	L
Gewicht zonder diesel	6800	kg
Gewicht	7500	kg

Specificatii

PVE 500 STAGE IV / TIER 4F

Unitate de putere hidraulica

Español

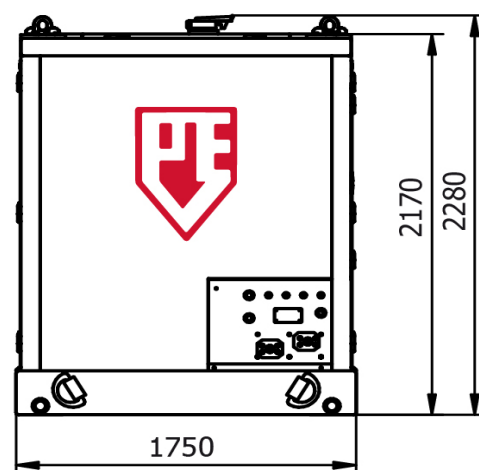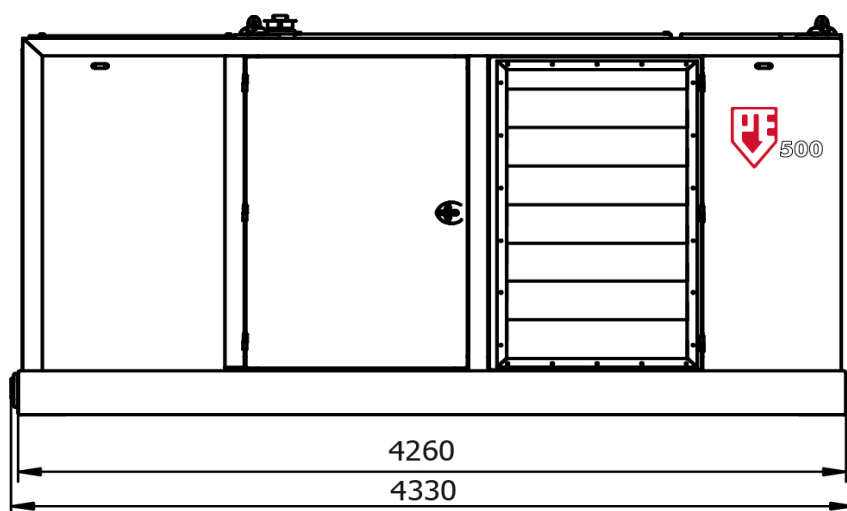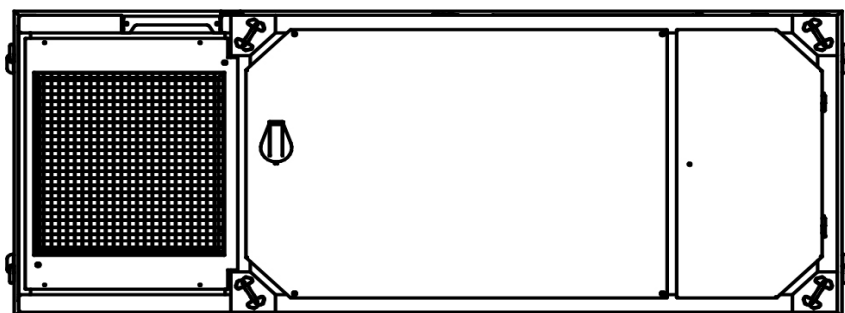

Specificatii

PVE 500 STAGE IV / TIER 4F

Motor Diesel	Volvo TAD 1374 VE	
Putere max. teoretica	375/510	kW/HP
Frecventa max.	1900	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit max. de ulei	520	L/min
Ulei Diesel	790	L
Capacitate rezervor aditiv AdBlue	45	L
Ulei hidraulic	1345	L
Greutate fara ulei	6800	kg
Greutate	7500	kg






Specifications

PVE 500 STAGE IV / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

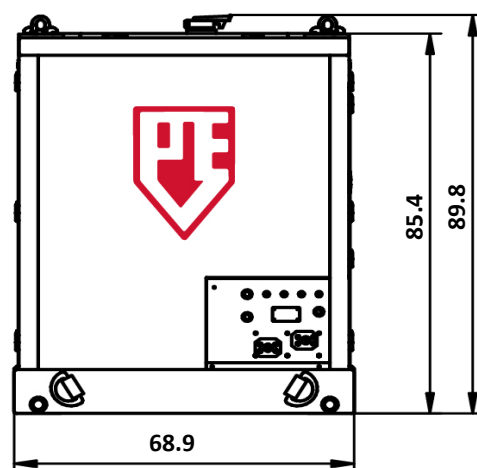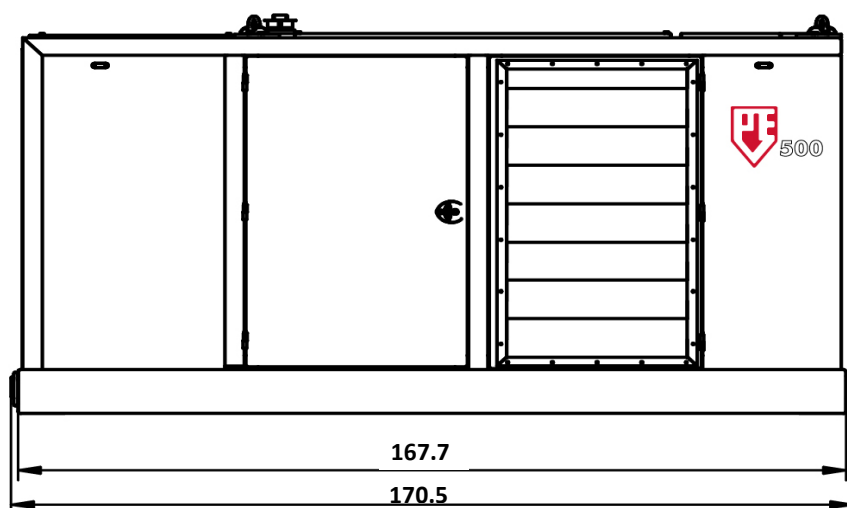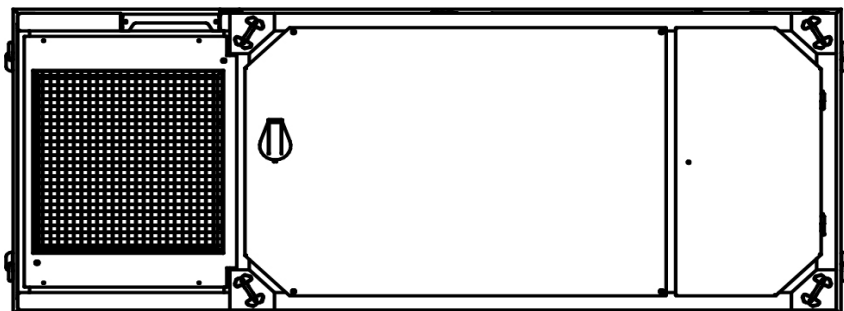

Specifications

PVE 500 STAGE IV / TIER 4F

Diesel Engine	Volvo TAD 1374 VE	
Max. theoretical power	375/510	kW/HP
Max. frequency	1,900	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	137	gal/min
Diesel Fuel	209	gal
DEF (AdBlue) capacity	12	gal
Hydraulic oil	355	gal
Weight without fuel	14,991	lbs
Weight with fuel	16,535	lbs