






Specification sheet

PVE 800 STAGE V / TIER 4F

Hydraulic Power Pack

English

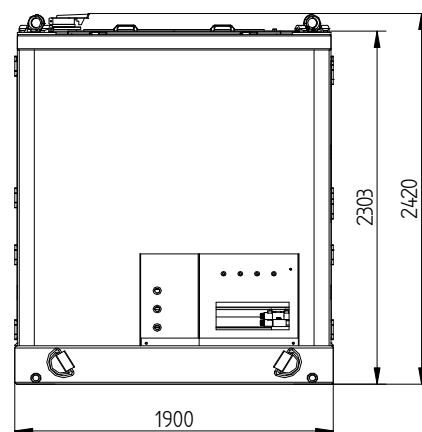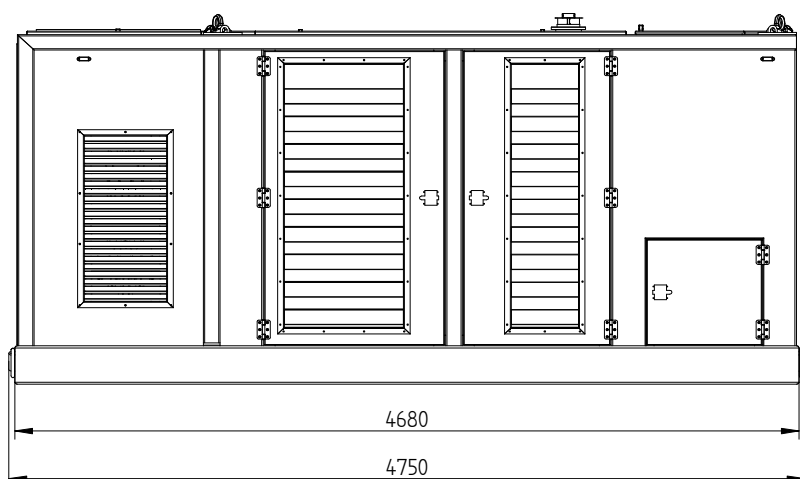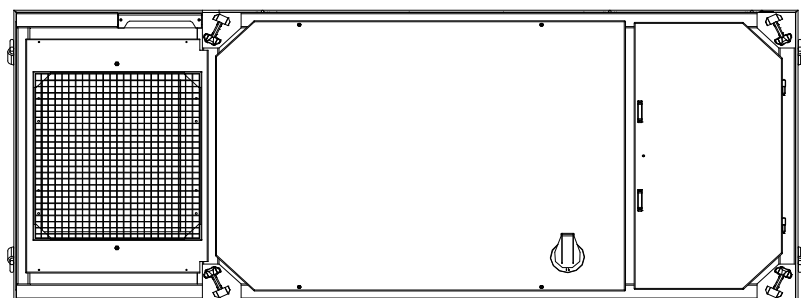

Specifications :

PVE 800 STAGE V / TIER 4F

Diesel Engine	CAT C18	
Max. theoretical power	563/755	kW/HP
Max. frequency	1800	rpm
Max. operating pressure	350	bar
Hydraulic pump	Rexroth	
Max. oil flow	810	L/min
Diesel oil	755	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	1600	L
Weight without fuel	8060	kg
Weight filled up	8700	kg






Technische Daten

PVE 800 STAGE V / TIER 4F

Aggregat

Deutsch

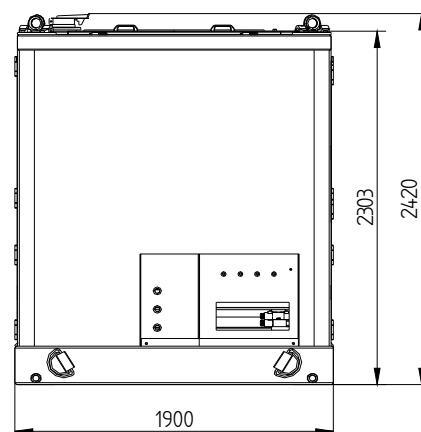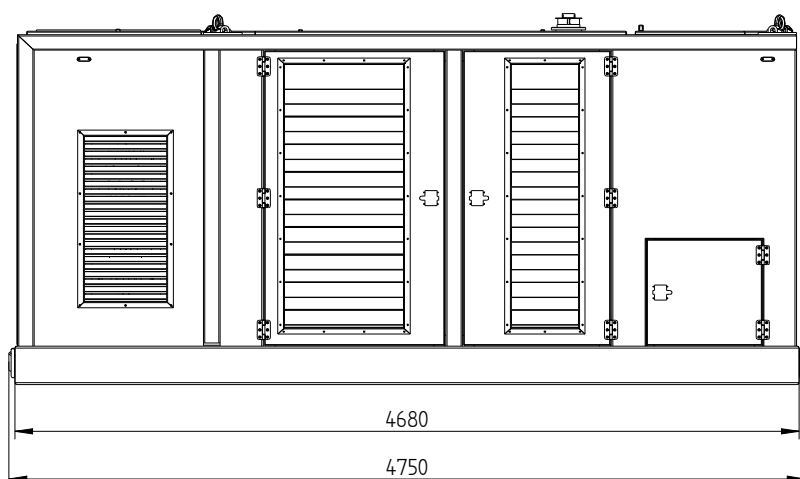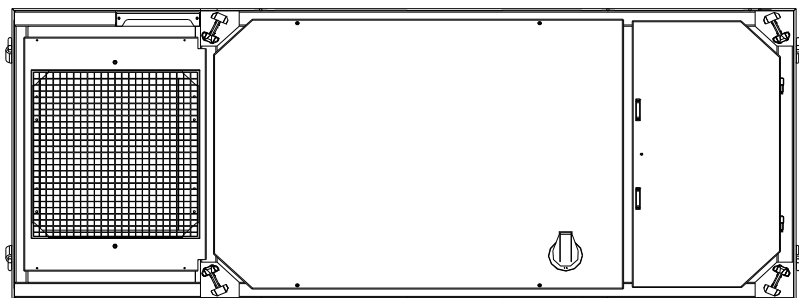

Technische Daten :

PVE 800 STAGE V / TIER 4F




Dieselmotor	CAT C18	
Max. theoretische Leistung	563/755	kW/HP
Max. Drehzahl	1800	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Rexroth	
Max. Fördermenge	810	L/min
Diesel Öl	755	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	1600	L
Gewicht ohne Diesel Öl	8060	kg
Gewicht	8700	kg

Spécifications

PVE 800 STAGE V / TIER 4F

Groupe hydraulique

Français

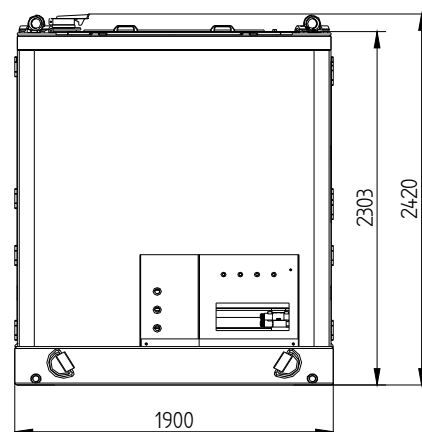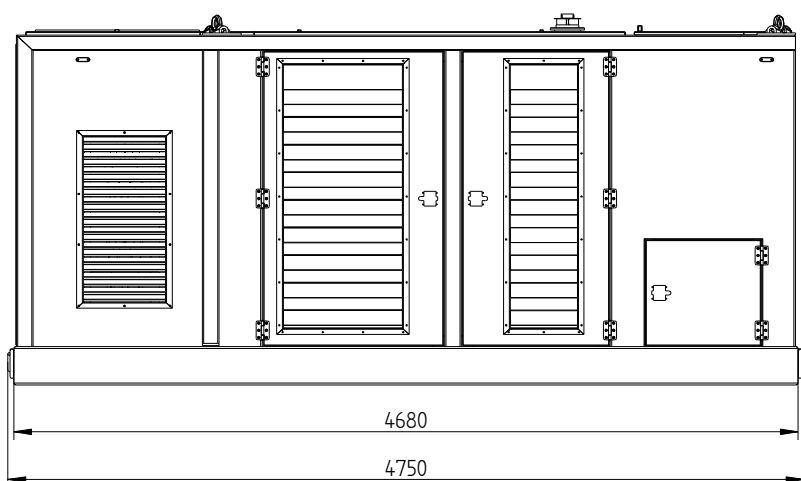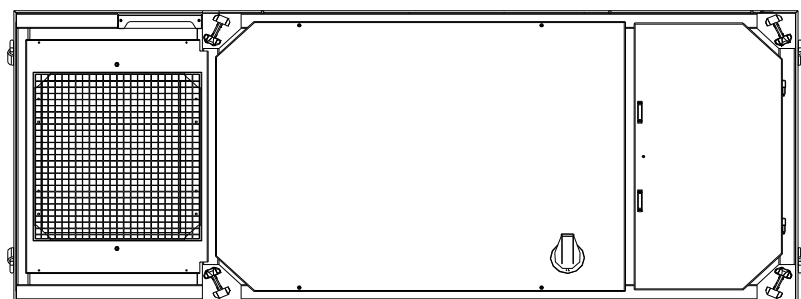

Spécifications

PVE 800 STAGE V / TIER 4F

Moteur Diesel	CAT C18	
Puissance théorique max.	563/755	kW/HP
Max. fréquence	1800	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Rexroth	
Débit d'huile max.	810	L/min
Huile diesel	755	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	1600	L
Poids sans huile diesel	8060	kg
Poids	8700	kg






Specificaties

PVE 800 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

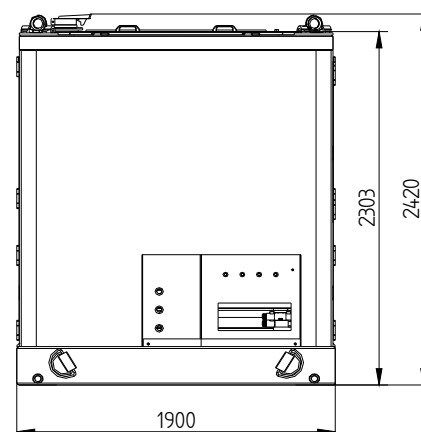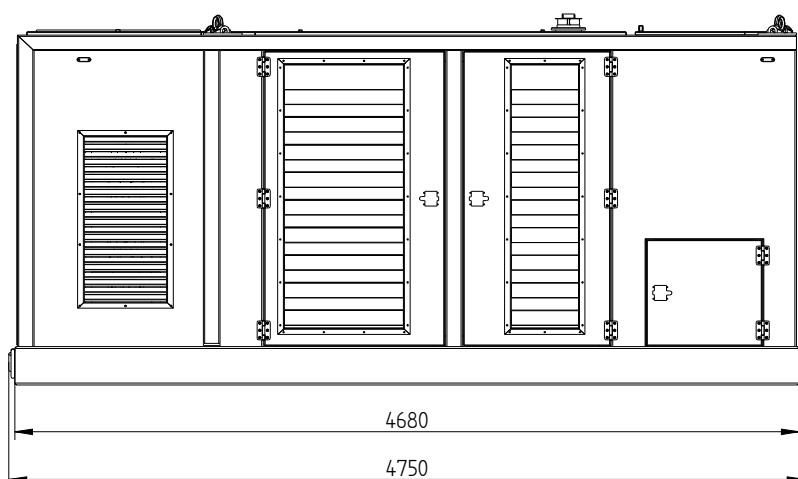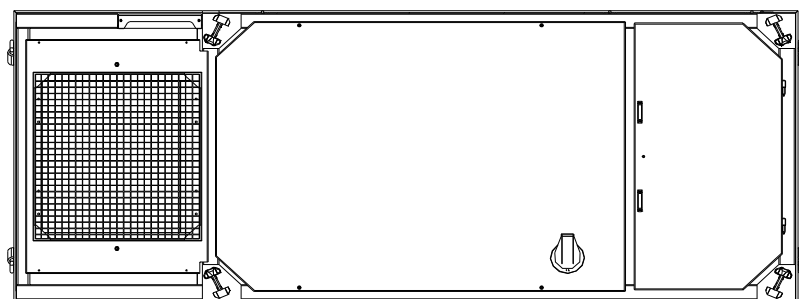

Specificaties

PVE 800 STAGE V / TIER 4F

Dieselmotor	CAT C18	
Max. theoretisch vermogen	563/755	kW/HP
Max. toerental	1800	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Rexroth	
Max. olie doorstroming	810	L/min
Diesel olie	755	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	1600	L
Gewicht zonder diesel	8060	kg
Gewicht	8700	kg






Specificatii

PVE 800 STAGE V / TIER 4F

Unitate de alimentare

Español

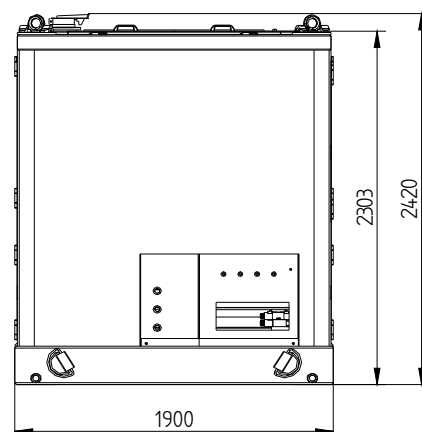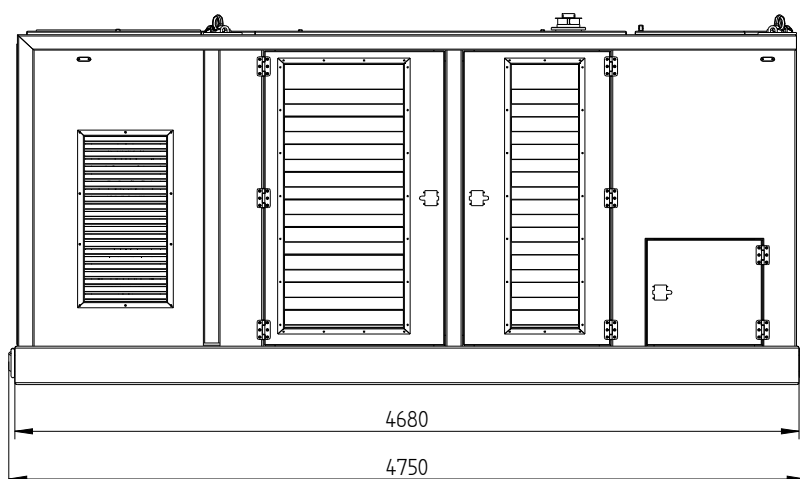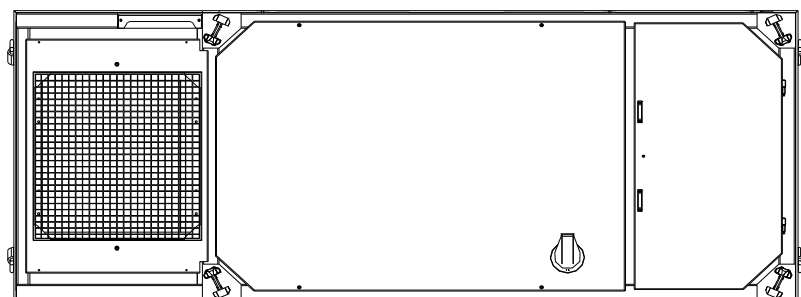

Specificatii

PVE 800 STAGE V / TIER 4F

Motor diesel	CAT C18	
Putere max. teoretica	563/755	kW/HP
Frecventa max.	1800	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Rexroth	
Debit max. de ulei	810	L/min
Ulei Diesel	755	L
Capacitate DEF (AdBlue)	N.A.	L
Ulei hidraulic	1600	L
Greutate fara ulei	8060	kg
Greutate	8700	kg






Specifications

PVE 800 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

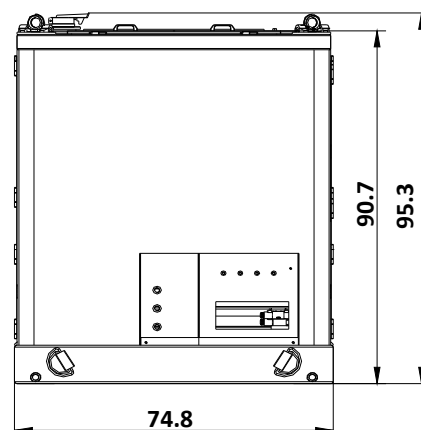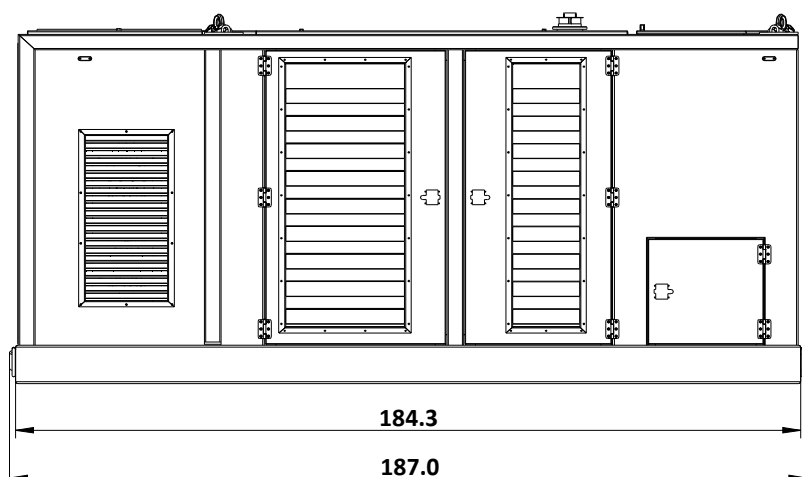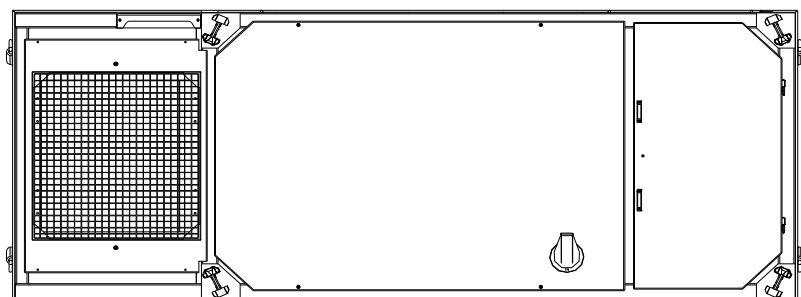

Specifications

PVE 800 STAGE V / TIER 4F

Diesel Engine	CAT C18	
Max. theoretical power	563/755	kW/HP
Max. frequency	1,800	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Rexroth	
Max. oil flow	214	gal/min
Diesel Fuel	199	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	423	gal
Weight without fuel	17,769	lbs
Weight with fuel	19,180	lbs