






Specification sheet

PVE 200 XS STAGE IV / TIER 4F

Hydraulic Power Pack

English

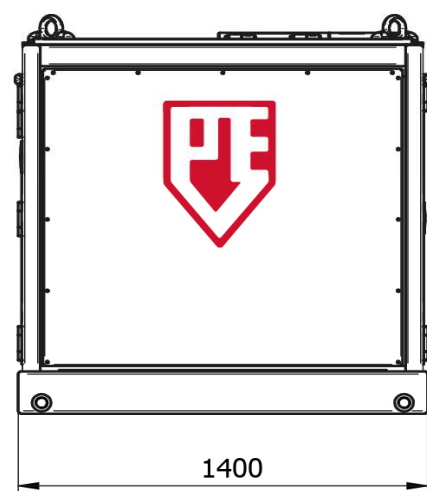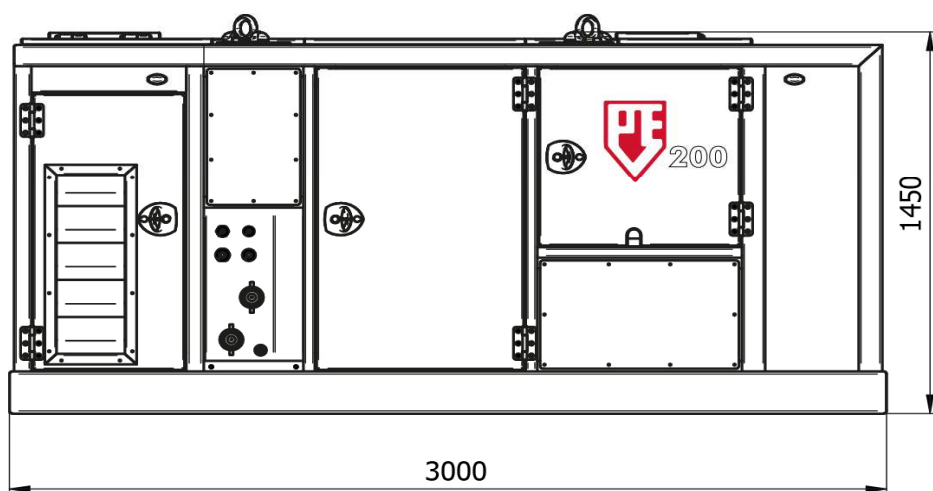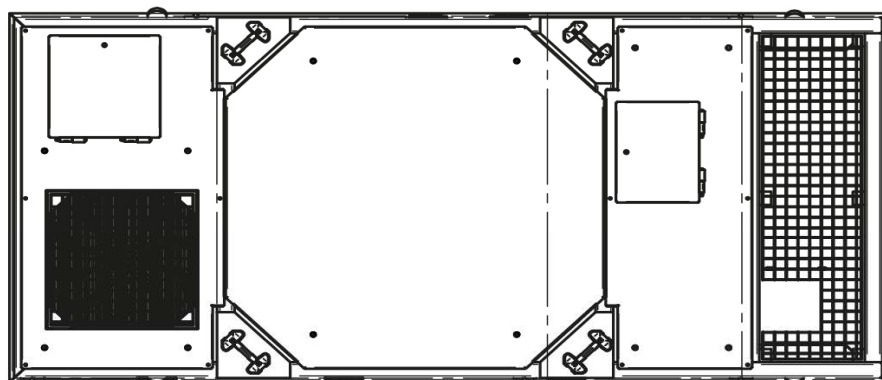

Specifications :

PVE 200 XS STAGE IV / TIER 4F

Diesel Engine	Volvo TAD 572 VE	
Max. theoretical power	160/218	kW/HP
Max. frequency	2300	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	212	L/min
Diesel oil	340	L
DEF (AdBlue) capacity	25	L
Hydraulic oil	400	L
Weight without fuel	2910	kg
Weight filled up	3200	kg






Technische Daten

PVE 200 XS STAGE IV / TIER 4F

Aggregat

Deutsch

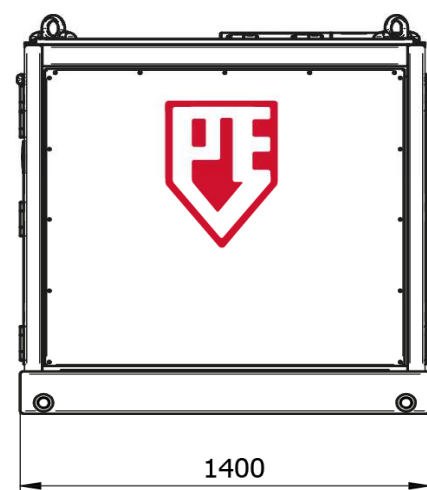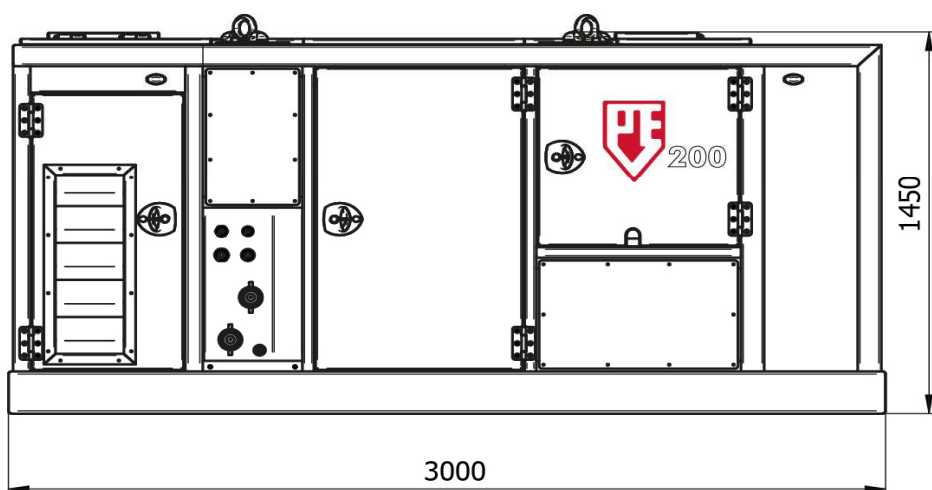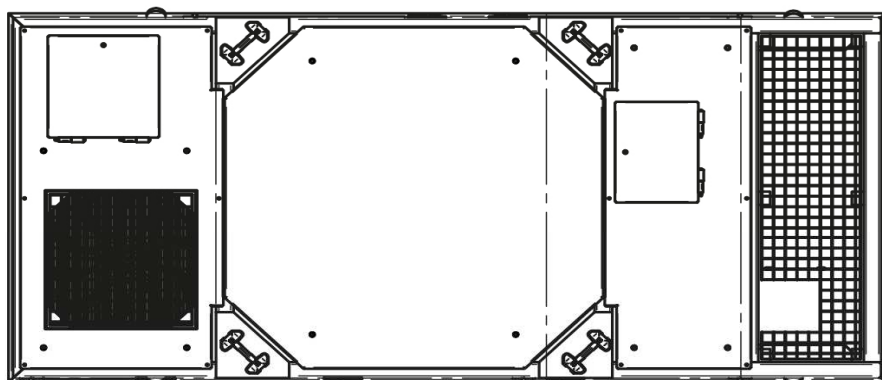

Technische Daten :

PVE 200 XS STAGE IV / TIER 4F

Dieselmotor	Volvo TAD 572 VE	
Max. theoretische Leistung	160/218	kW/HP
Max. Drehzahl	2300	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	212	L/min
Diesel Öl	340	L
DAF (AdBlue) kapazität	25	L
Hydraulische Öl	400	L
Gewicht ohne Diesel Öl	2910	kg
Gewicht	3200	kg






Spécifications

PVE 200 XS STAGE IV / TIER 4F

Groupe hydraulique

Français

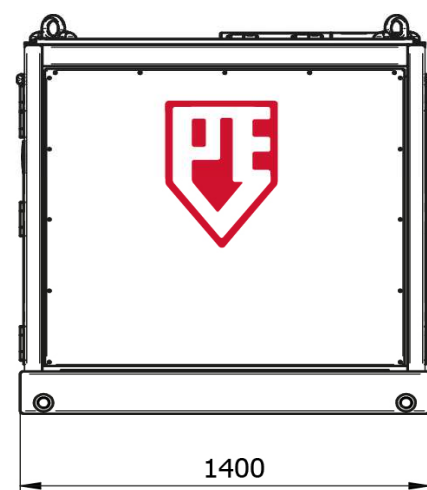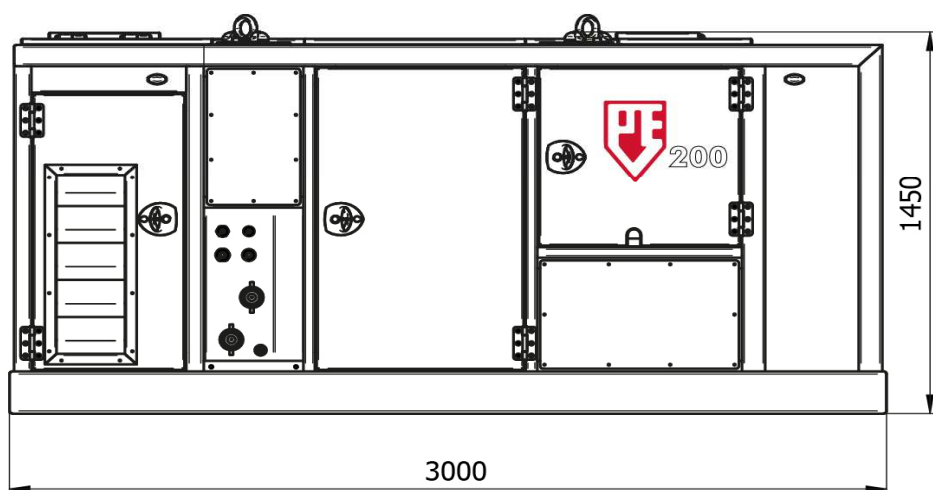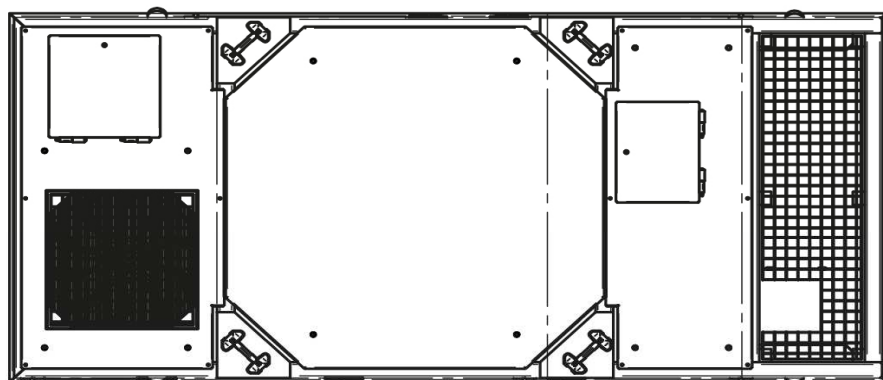

Spécifications

PVE 200 XS STAGE IV / TIER 4F

Moteur Diesel	Volvo TAD 572 VE	
Puissance théorique max.	160/218	kW/HP
Max. fréquence	2300	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	212	L/min
Huile diesel	340	L
Capacité FED (AdBlue)	25	L
Huile hydraulique	400	L
Poids sans huile diesel	2910	kg
Poids	3200	kg






Specificaties

PVE 200 XS STAGE IV / TIER 4F

Hydraulisch aggregaat

Nederlands

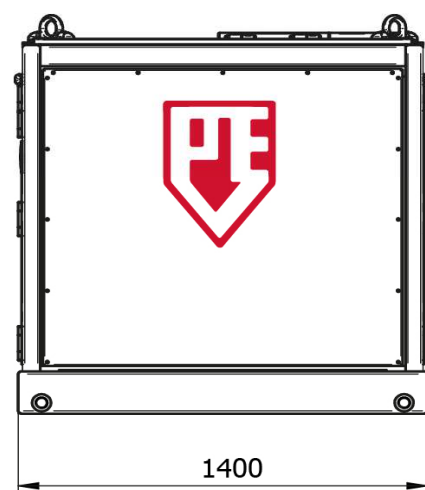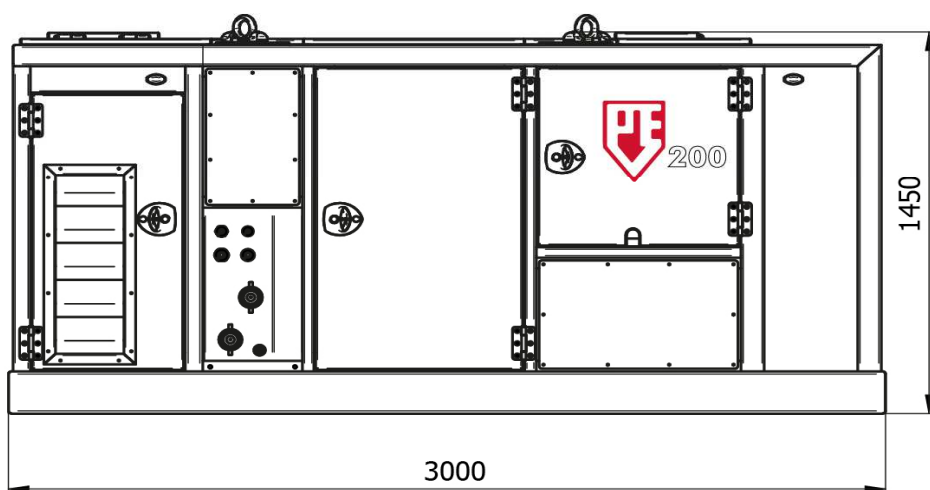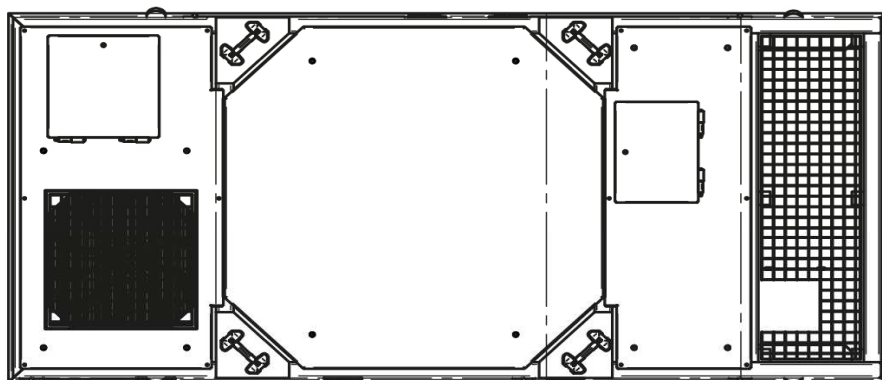

Specificaties

PVE 200 XS STAGE IV / TIER 4F

Dieselmotor	Volvo TAD 572 VE	
Max. theoretisch vermogen	160/218	kW/HP
Max. toerental	2300	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	212	L/min
Diesel olie	340	L
DEF (AdBlue) capaciteit	25	L
Hydraulische olie	400	L
Gewicht zonder diesel	2910	kg
Gewicht	3200	kg






Specificatii

PVE 200 XS STAGE IV / TIER 4F

Unitate de putere hidraulica

Español

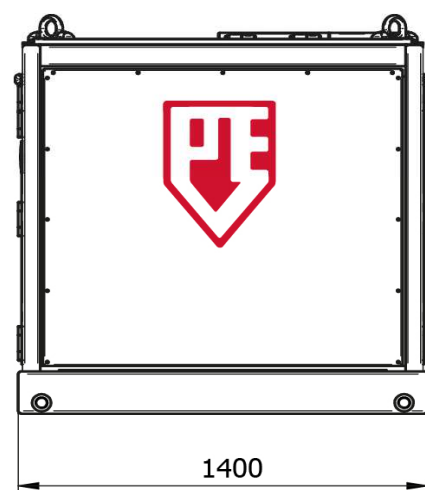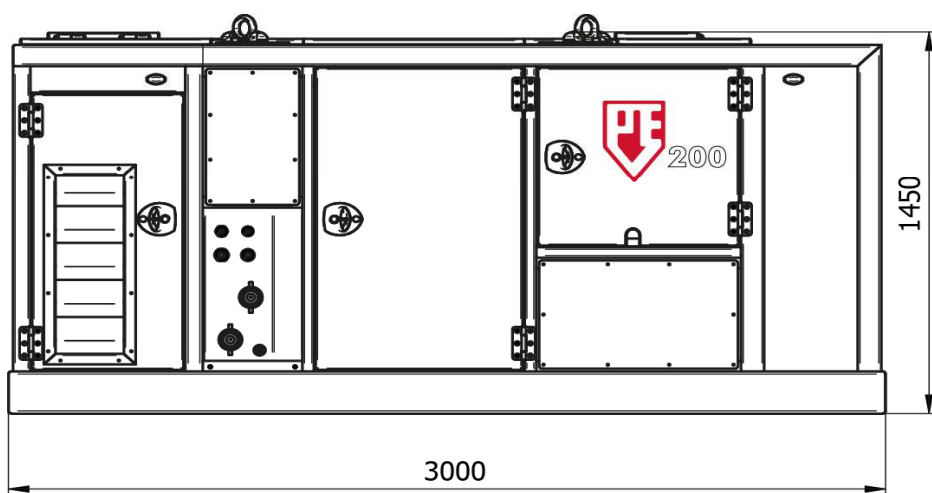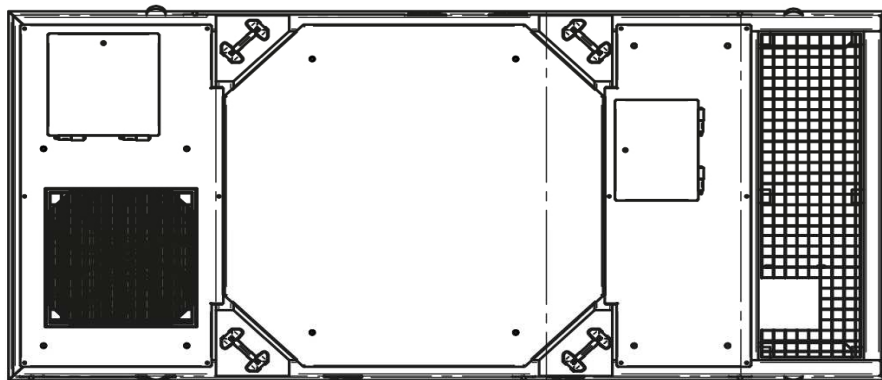

Specificatii

PVE 200 XS STAGE IV / TIER 4F

Motor Diesel	Volvo TAD 572 VE	
Putere max. teoretica	160/218	kW/HP
Frecventa max.	2300	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit max. de ulei	212	L/min
Ulei Diesel	340	L
Capacitate rezervor aditiv AdBlue	25	L
Ulei hidraulic	400	L
Greutate fara ulei	2910	kg
Greutate	3200	kg






Specifications

PVE 200 XS STAGE IV / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

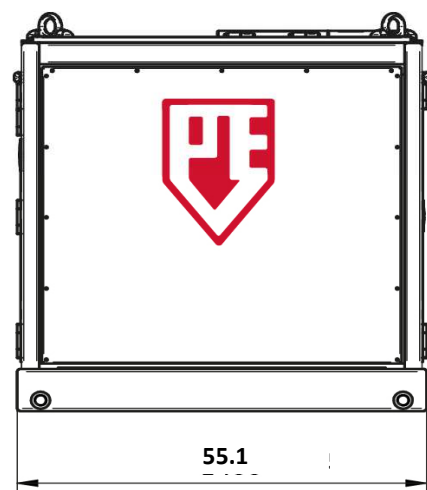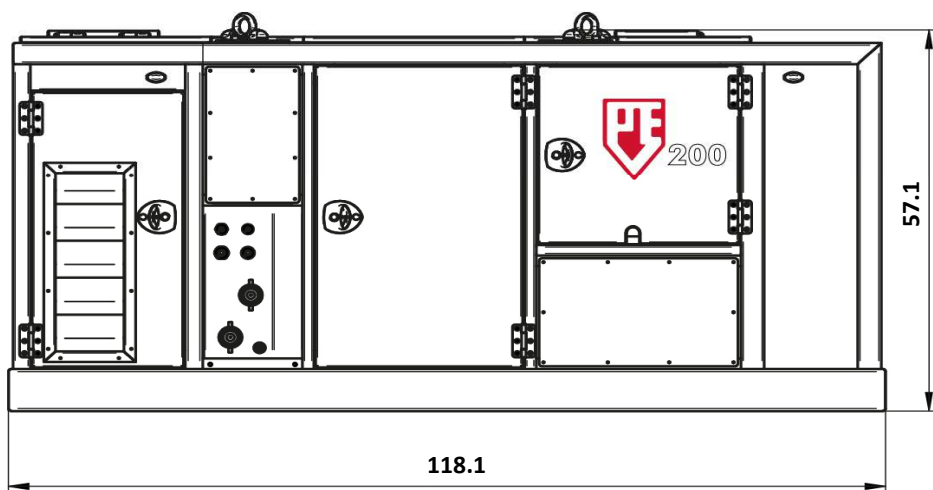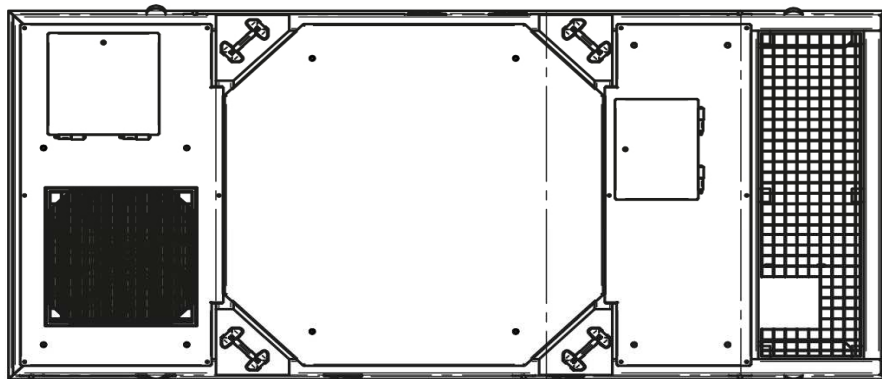

Specifications

PVE 200 XS STAGE IV / TIER 4F

Diesel Engine	Volvo TAD 572 VE	
Max. theoretical power	160/218	kW/HP
Max. frequency	2,300	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	56	gal/min
Diesel Fuel	90	gal
DEF (AdBlue) capacity	7	gal
Hydraulic oil	106	gal
Weight without fuel	6,415	lbs
Weight with fuel	7,055	lbs