






Specification sheet

PVE 300 STAGE IIIA / TIER 3

Hydraulic Power Pack

English

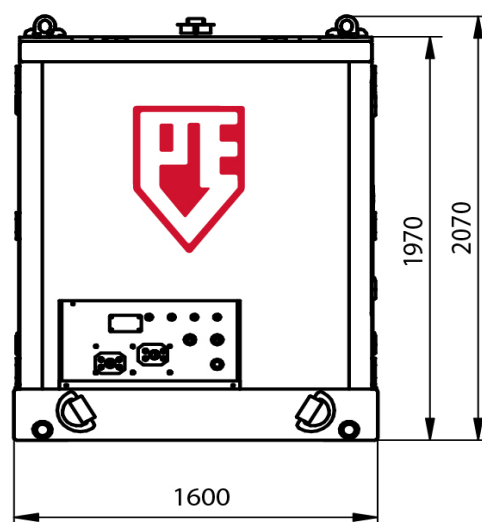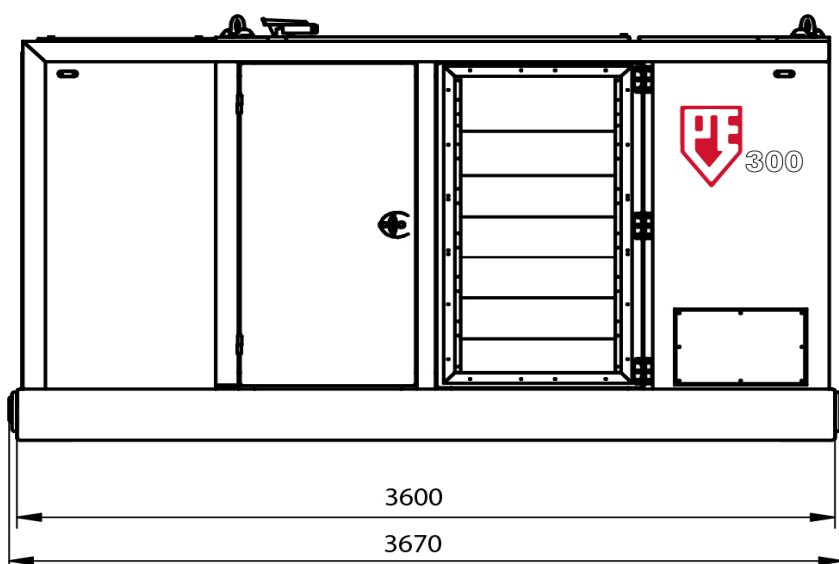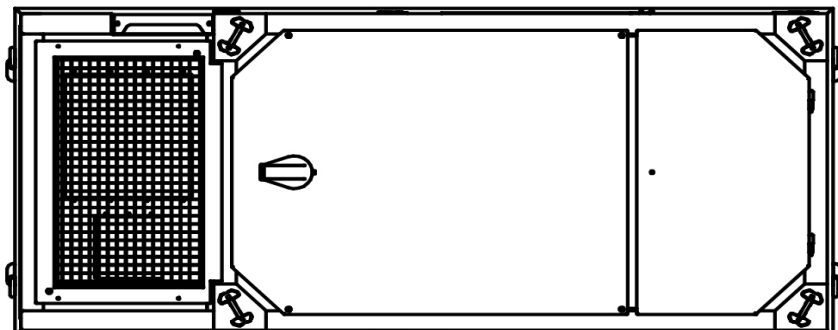

Specifications :

PVE 300 STAGE IIIA / TIER 3




Diesel Engine	Volvo TAD 753 GE	
Max. theoretical power	212/288	kW/HP
Max. frequency	1800	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	324	L/min
Diesel oil	530	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	800	L
Weight without fuel	4700	kg
Weight filled up	5150	kg



Technische Daten PVE 300 STAGE IIIA / TIER 3

Aggregat

Deutsch

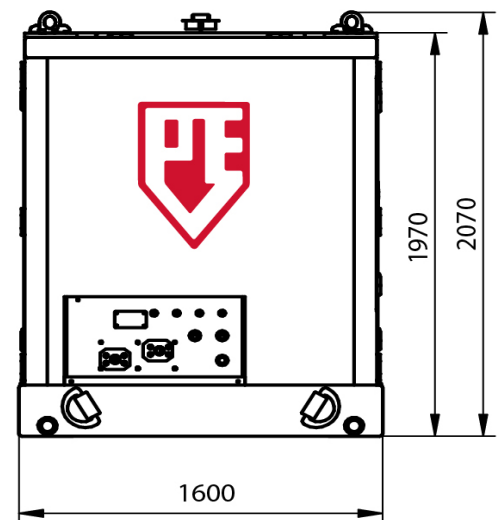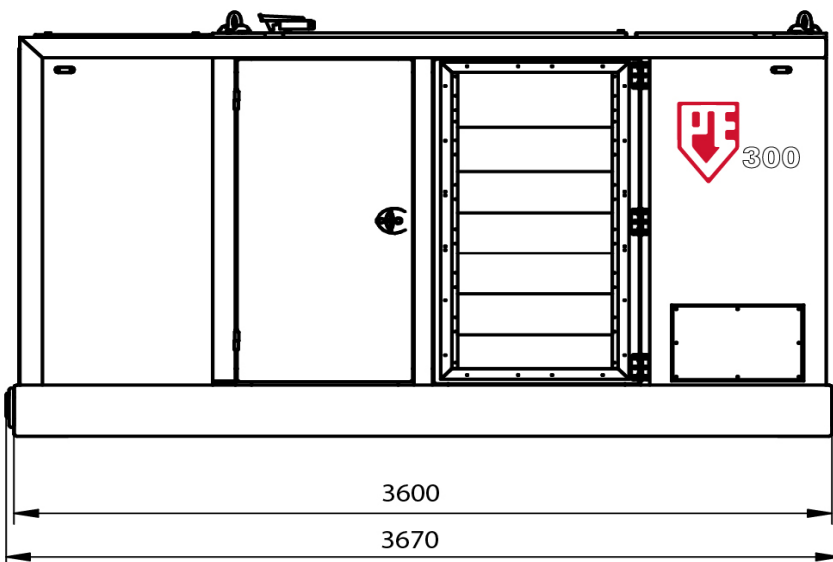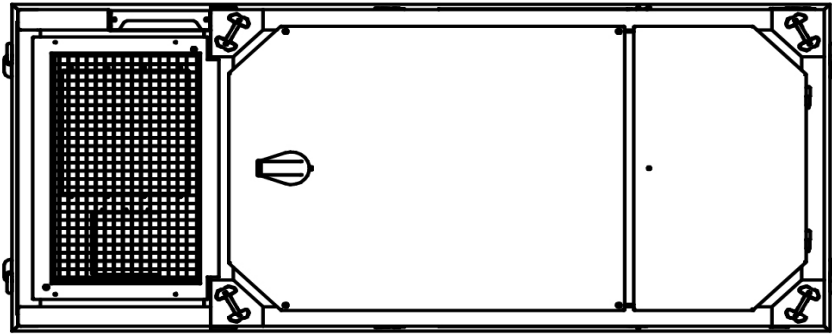

Technische Daten :

PVE 300 STAGE IIIA / TIER 3

Dieselmotor	Volvo TAD 753 GE	
Max. theoretische Leistung	212/288	kW/HP
Max. Drehzahl	1800	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	324	L/min
Diesel Öl	530	L
DAF (AdBlue) kapazität	N.A.	L
Hydraulische Öl	800	L
Gewicht ohne Diesel Öl	4700	kg
Gewicht	5150	kg






Spécifications

PVE 300 STAGE IIIA / TIER 3

Groupe hydraulique

Français

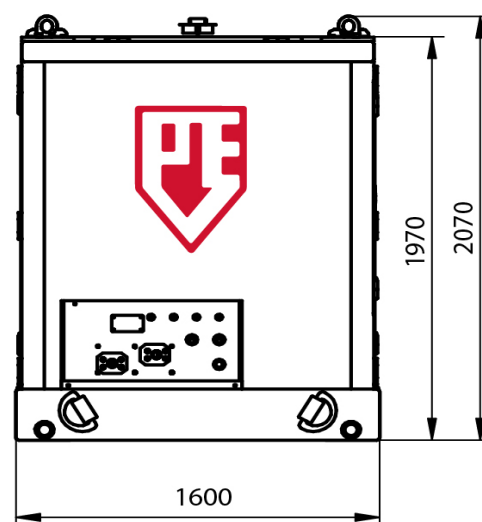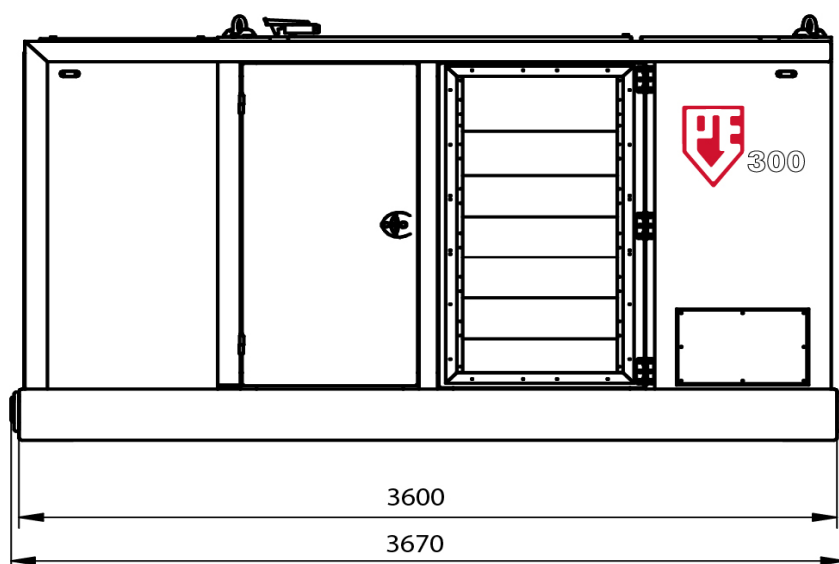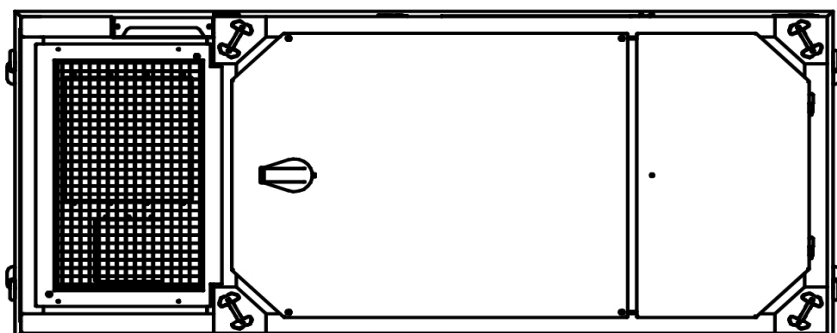

Spécifications

PVE 300 STAGE IIIA / TIER 3

Moteur Diesel	Volvo TAD 753 GE	
Puissance théorique max.	212/288	kW/HP
Max. fréquence	1800	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Parker	
Débit d'huile max.	324	L/min
Huile diesel	530	L
Capacité FED (AdBlue)	N.A.	L
Huile hydraulique	800	L
Poids sans huile diesel	4700	kg
Poids	5150	kg






Specificaties

PVE 300 STAGE IIIA / TIER 3

Hydraulisch aggregaat

Nederlands

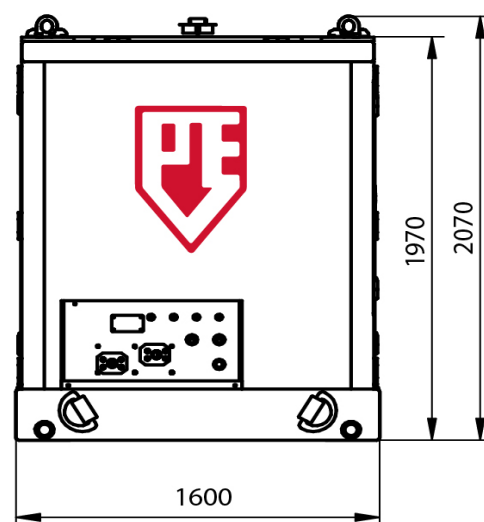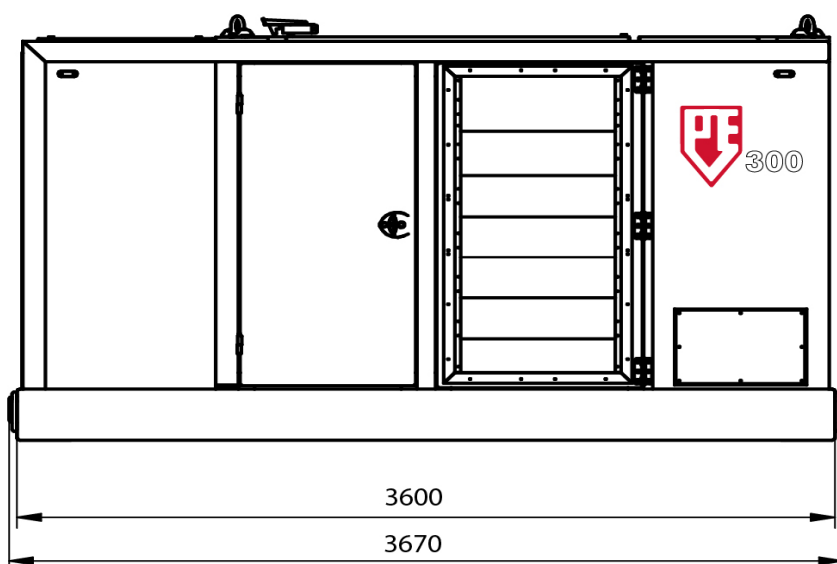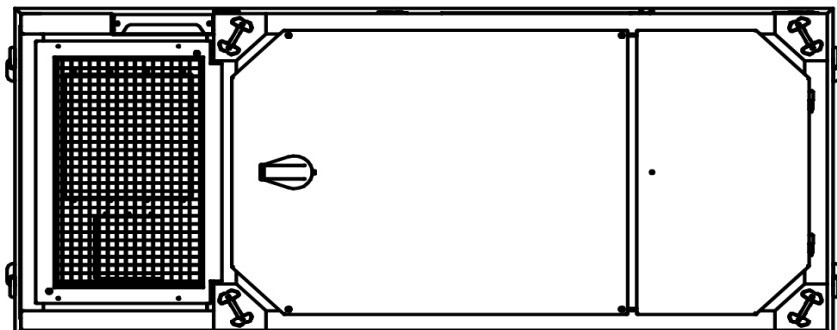

Specificaties

PVE 300 STAGE IIIA / TIER 3

Dieselmotor	Volvo TAD 753 GE	
Max. theoretisch vermogen	212/288	kW/HP
Max. toerental	1800	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	324	L/min
Diesel olie	530	L
DEF (AdBlue) capaciteit	N.A.	L
Hydraulische olie	800	L
Gewicht zonder diesel	4700	kg
Gewicht	5150	kg






Specificatii

PVE 300 STAGE IIIA / TIER 3

Unitate de putere hidraulica

Español

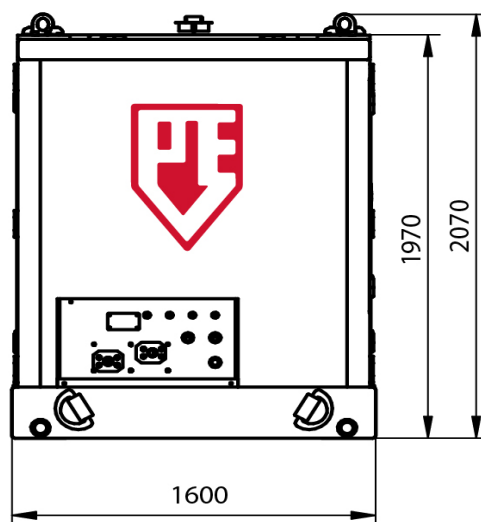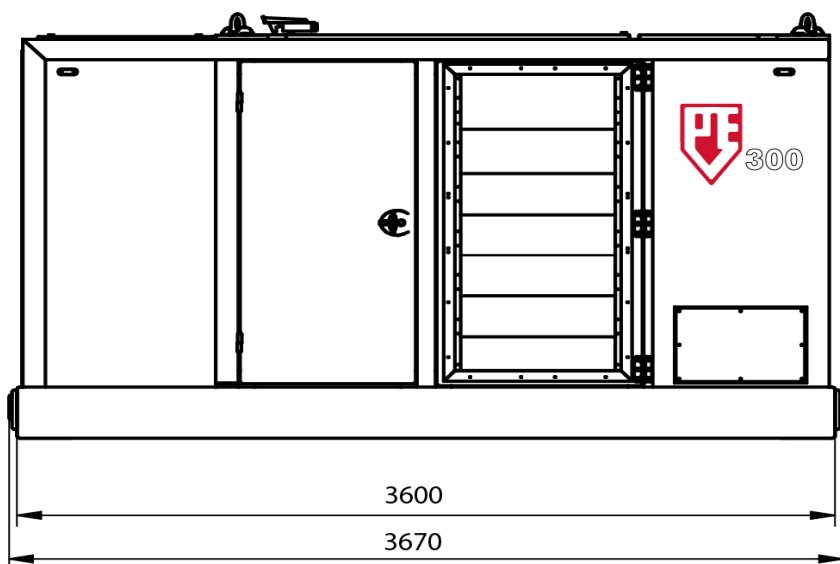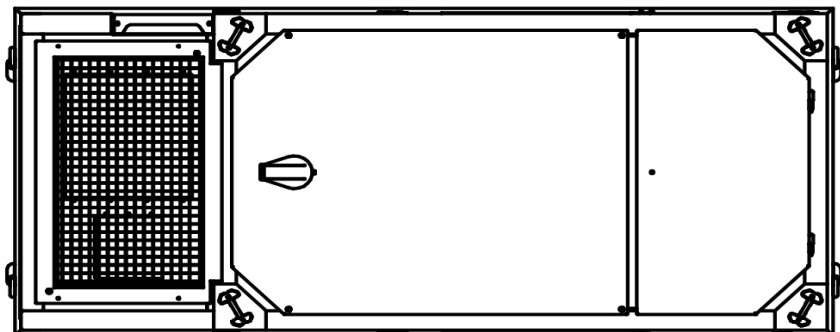

Specificatii

PVE 300 STAGE IIIA / TIER 3

Motor Diesel	Volvo TAD 753 GE	
Putere max. teoretica	212/288	kW/HP
Frecventa max.	1800	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit max. de ulei	324	L/min
Ulei Diesel	530	L
Capacitate rezervor aditiv AdBlue	N.A.	L
Ulei hidraulic	800	L
Greutate fara ulei	4700	kg
Greutate	5150	kg






Specifications

PVE 300 STAGE IIIA / TIER 3

Hydraulic Power Pack

USA

Dimensions in inches

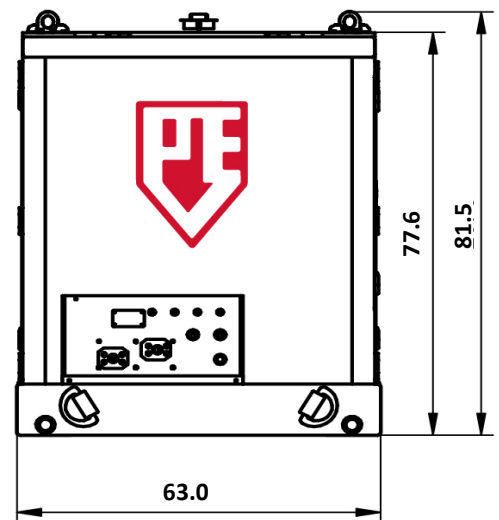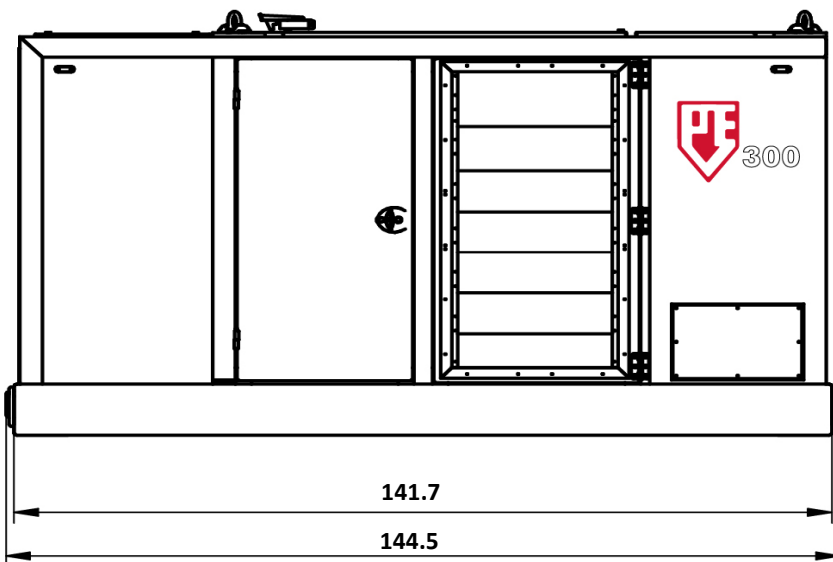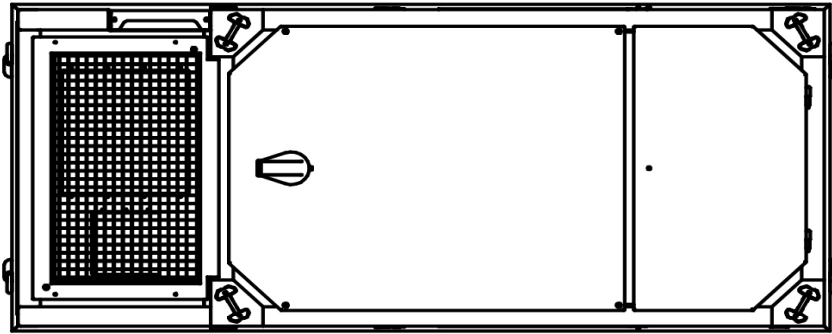

Specifications

PVE 300 STAGE IIIA / TIER 3

Diesel Engine	Volvo TAD 753 GE	
Max. theoretical power	212/288	kW/HP
Max. frequency	1,800	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	86	gal/min
Diesel Fuel	140	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	211	gal
Weight without fuel	10,362	lbs
Weight with fuel	11,354	lbs