
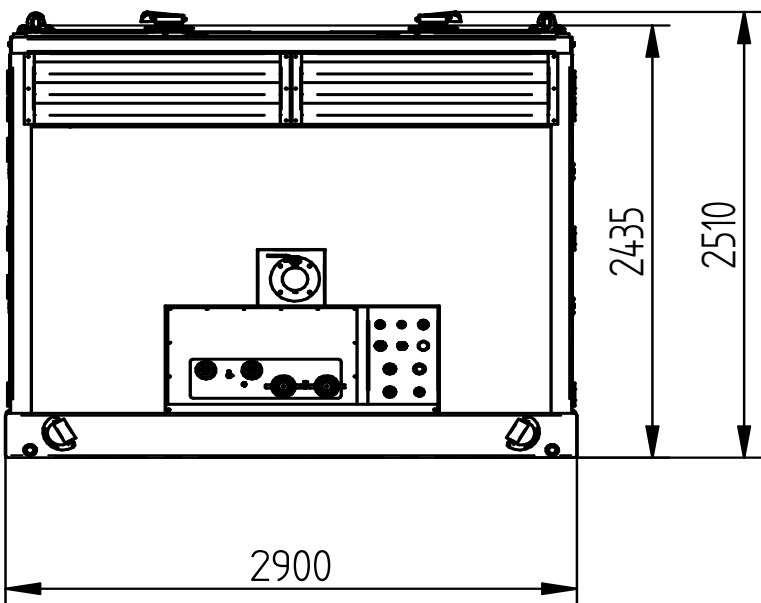
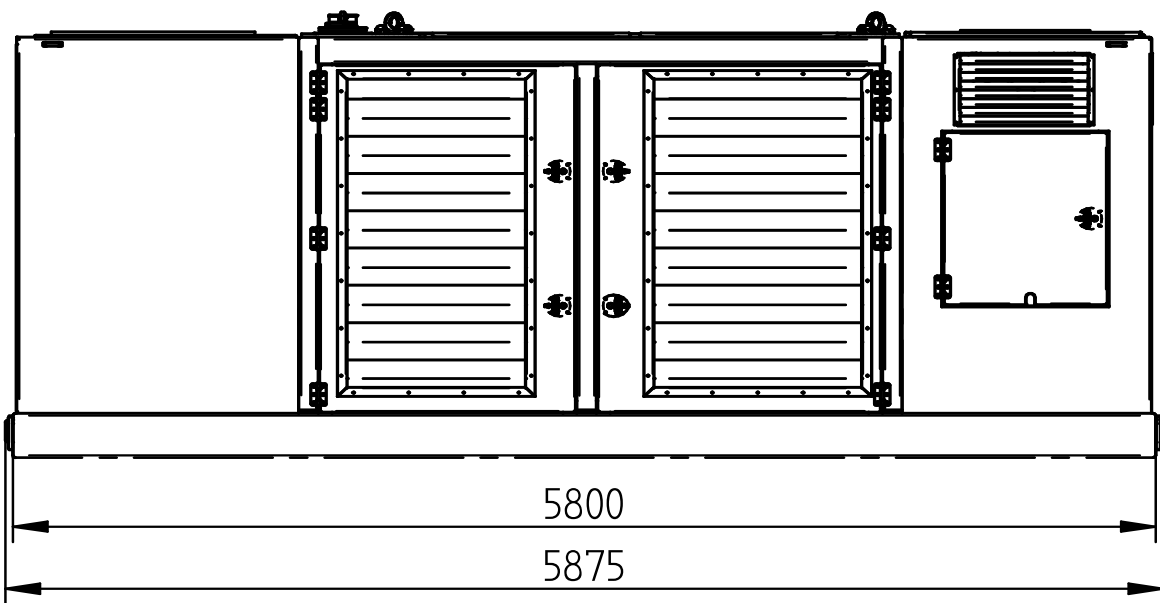


Specification sheet




ICE 1600 STAGE V / TIER 4F

Hydraulic Power Pack




English

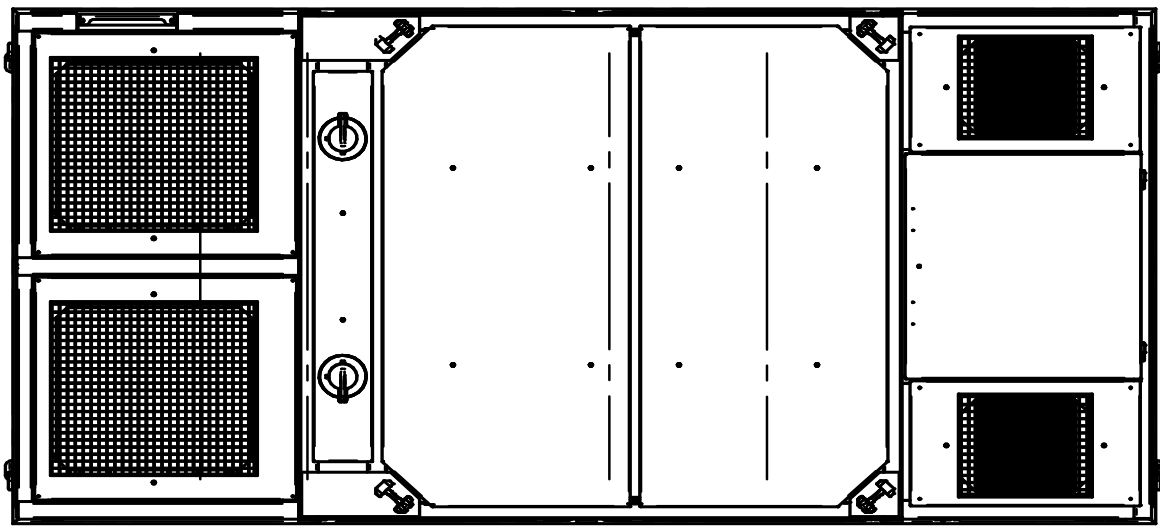

Specifications :		ICE 1600 STAGE V / TIER 4F	
Diesel Engine	Volvo Penta TWD 1683 VE (2x)		
Max. theoretical power	1170/1592		kW/HP
Max. frequency	1900		rpm
Max. operating pressure	350		bar
Hydraulic pump	Rexroth		
Max. oil flow	1710		L/min
Diesel oil	2130		L
DEF (AdBlue) capacity	140		L
Hydraulic oil	3300		L
Weight without fuel	17100		kg
Weight filled up	18900		kg

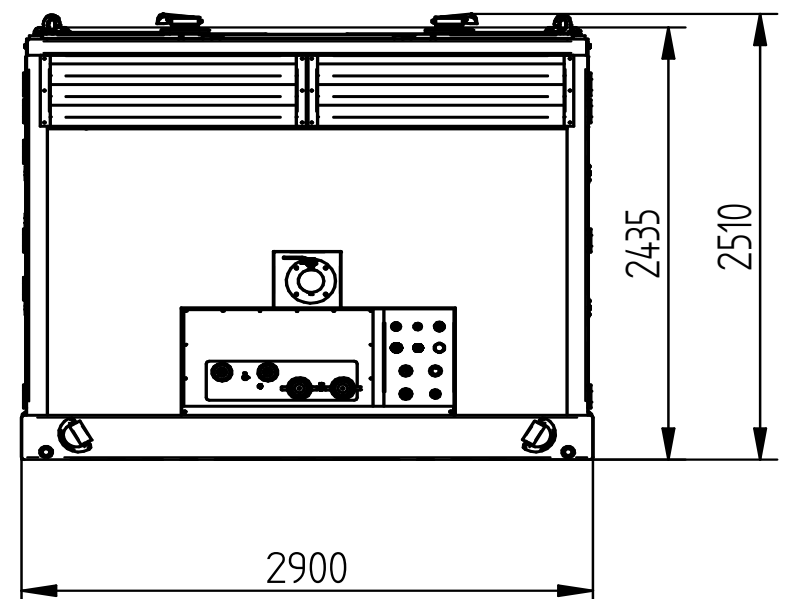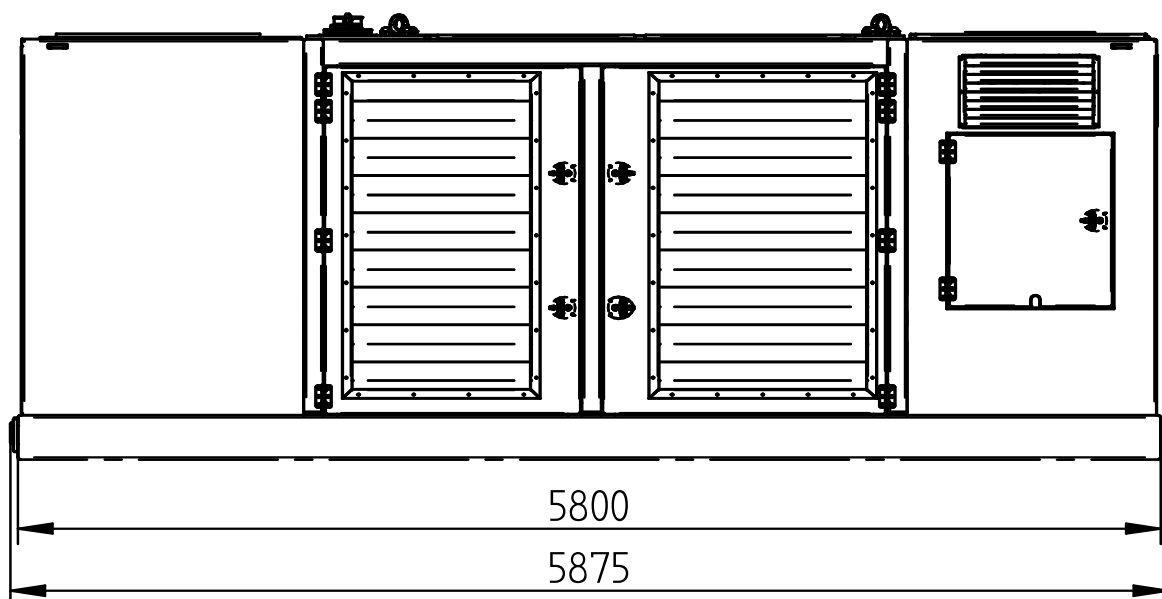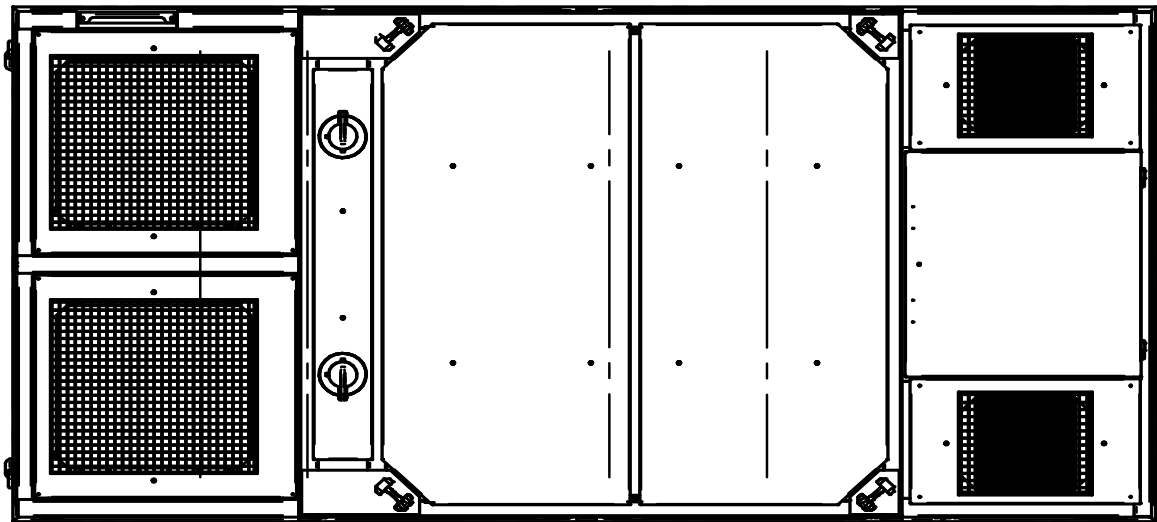

Technische Daten :		ICE 1600 STAGE V / TIER 4F	
Dieselmotor	Volvo Penta TWD 1683 VE (2x)		
Max. theoretische Leistung	1170/1592		kW/HP
Max. Drehzahl	1900		rpm
Max. Betriebsdruck	350		bar
Hydraulische Pumpe	Rexroth		
Max. Fördermenge	1710		L/min
Diesel Öl	2130		L
DAF (AdBlue) kapazität	140		L
Hydraulische Öl	3300		L
Gewicht ohne Diesel Öl	17100		kg
Gewicht	18900		kg

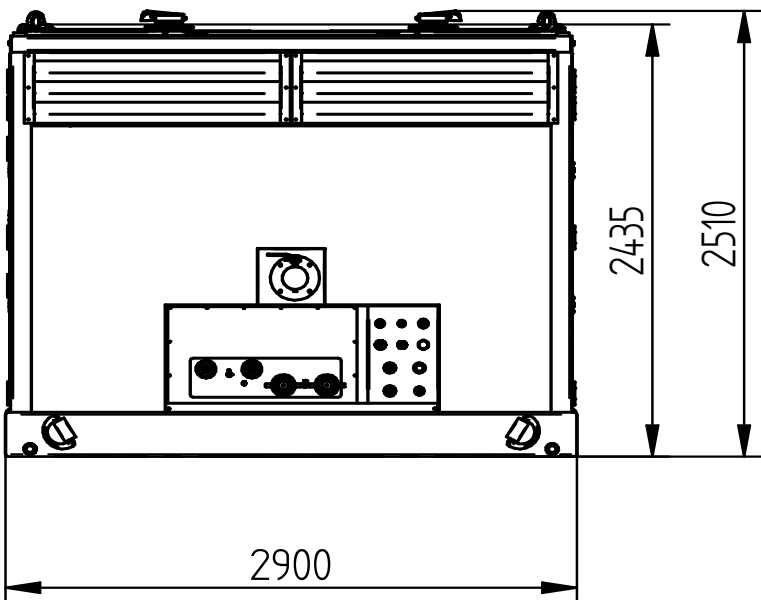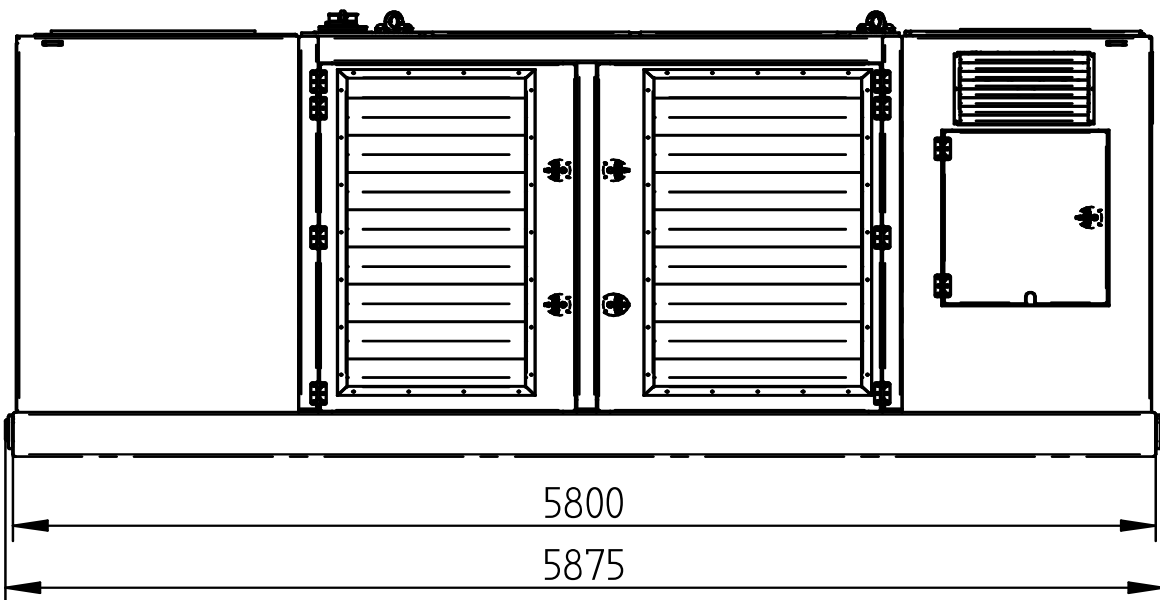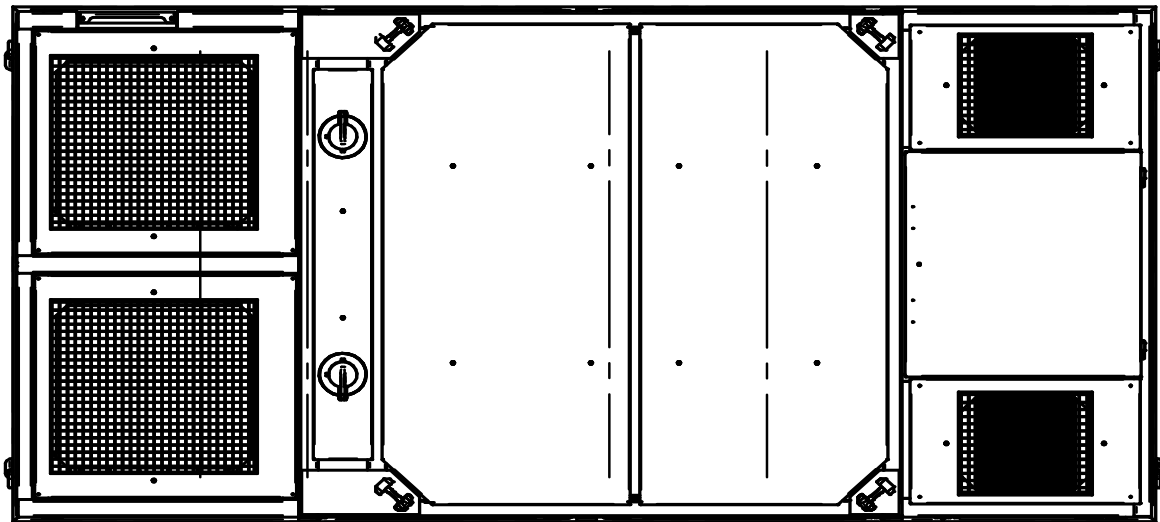

Spécifications

ICE 1600 STAGE V / TIER 4F




Moteur Diesel	Volvo Penta TWD 1683 VE (2x)	
Puissanse théorique max.	1170/1592	kW/HP
Max. fréquence	1900	rpm
Pression de travail max.	350	bar
Pompe hydraulique	Rexroth	
Débit d'huile max.	1710	L/min
Huile diesel	2130	L
Capacité FED (AdBlue)	140	L
Huile hydraulique	3300	L
Poids sans huile diesel	17100	kg
Poids	18900	kg

Specificaties

ICE 1600 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

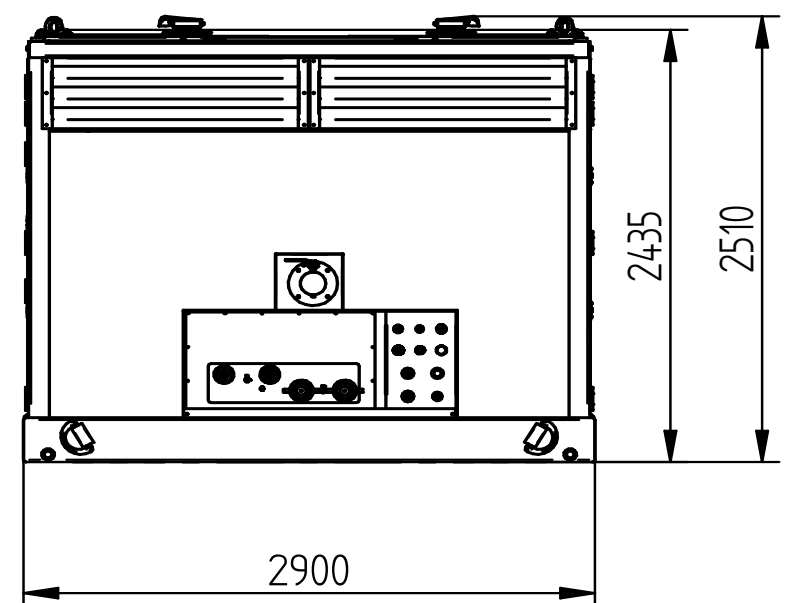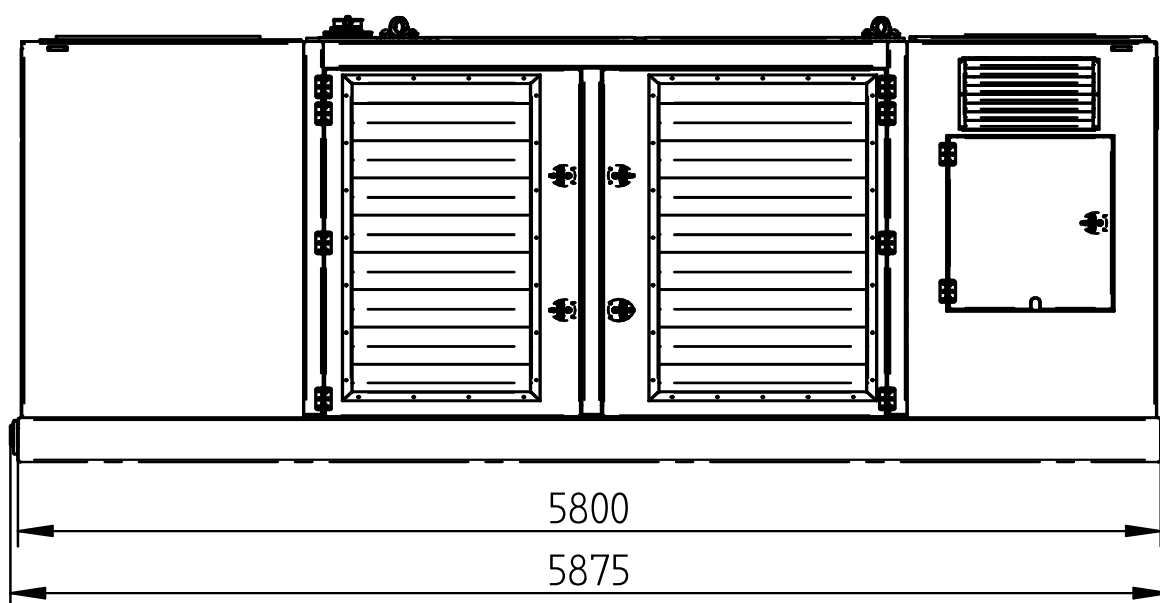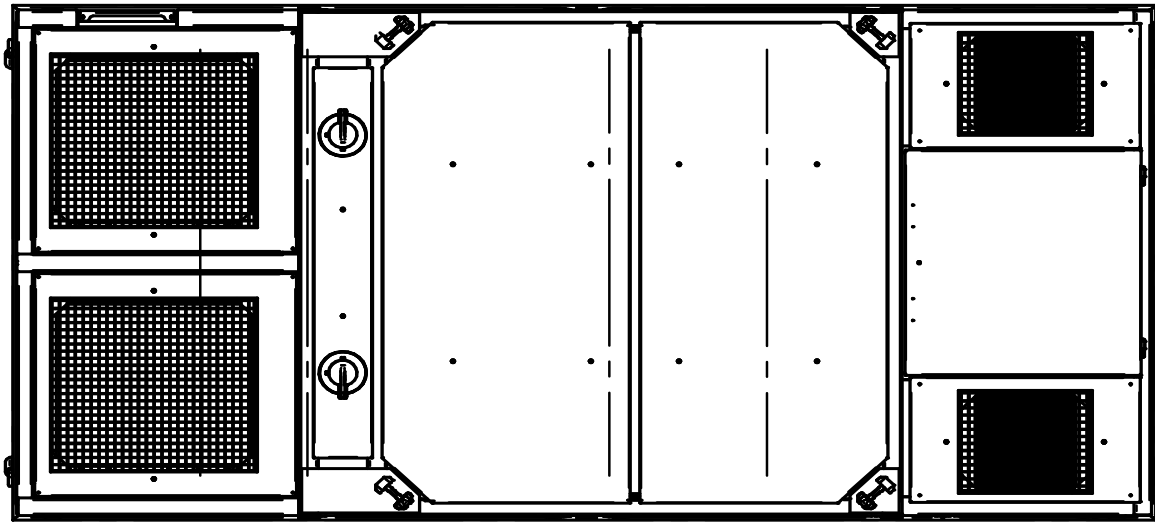

Specificaties		ICE 1600 STAGE V / TIER 4F	
Dieselmotor	Volvo Penta TWD 1683 VE (2x)		
Max. theoretisch vermogen	1170/1592		kW/HP
Max. toerental	1900		rpm
Max. werkdruk	350		bar
Hydraulische pomp	Rexroth		
Max. olie doorstroming	1710		L/min
Diesel olie	2130		L
DEF (AdBlue) capaciteit	140		L
Hydraulische olie	3300		L
Gewicht zonder diesel	17100		kg
Gewicht	18900		kg




Specifications

ICE 1600 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

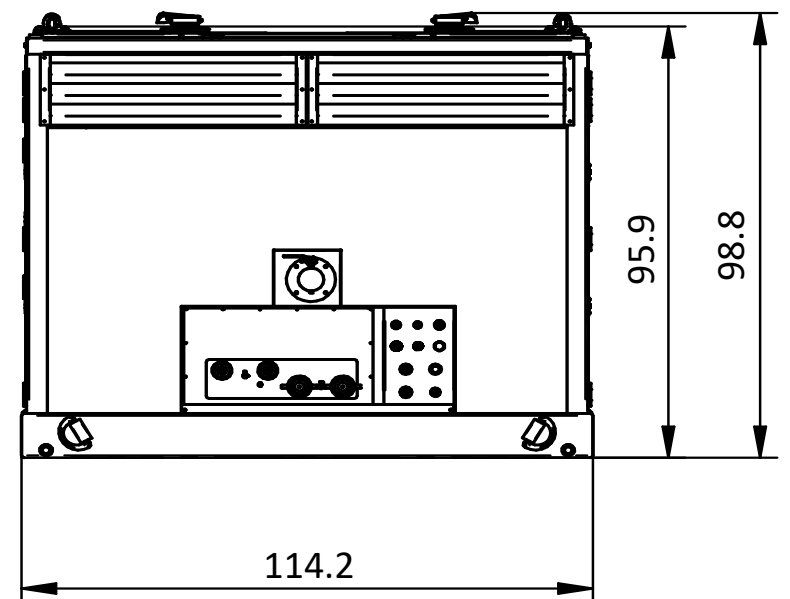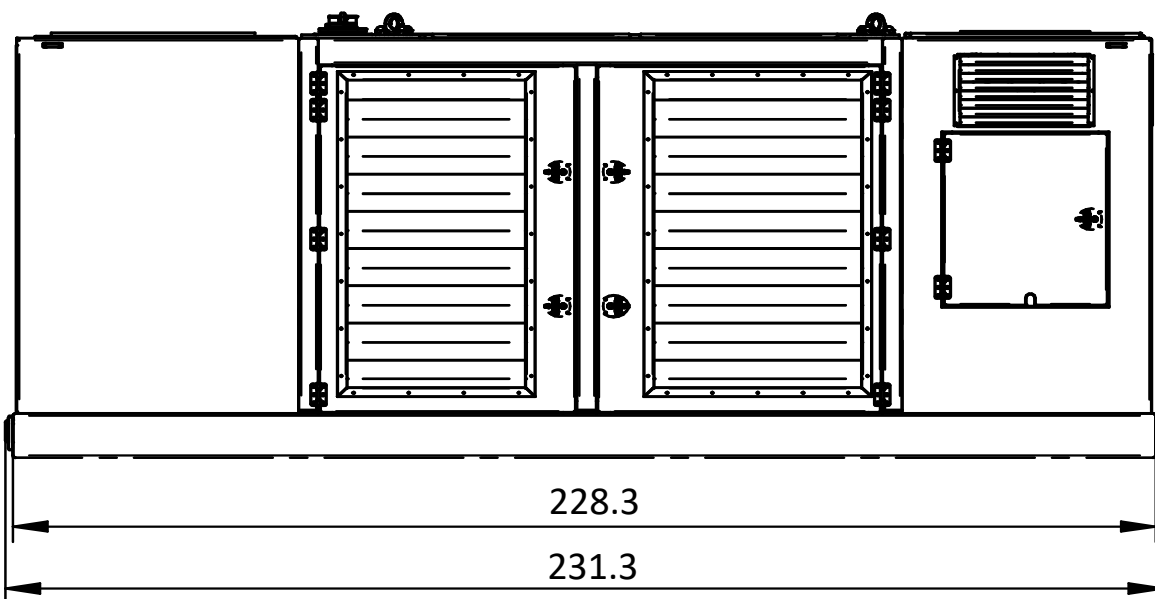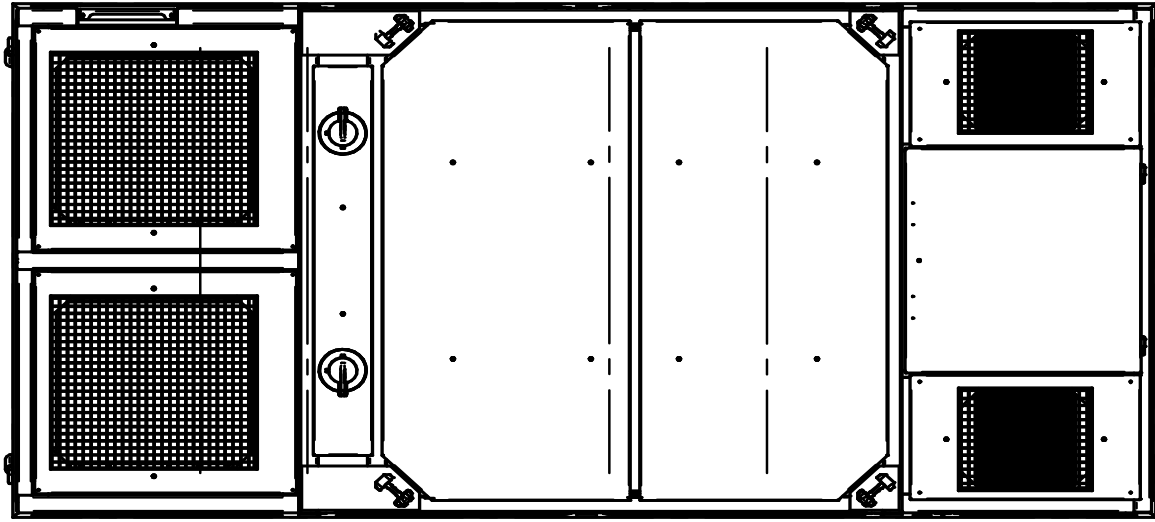




Specifications	ICE 1600 STAGE V / TIER 4F	
Diesel Engine	Volvo Penta TWD 1683 VE (2x)	
Max. theoretical power	1,170/1,592	kW/HP
Max. frequency	1,900	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Rexroth	
Max. oil flow	452	gal/min
Diesel Fuel	563	gal
DEF (AdBlue) capacity	37	gal
Hydraulic oil	872	gal
Weight without fuel	37,699	lbs
Weight with fuel	41,667	lbs

Specificatii

ICE 1600 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

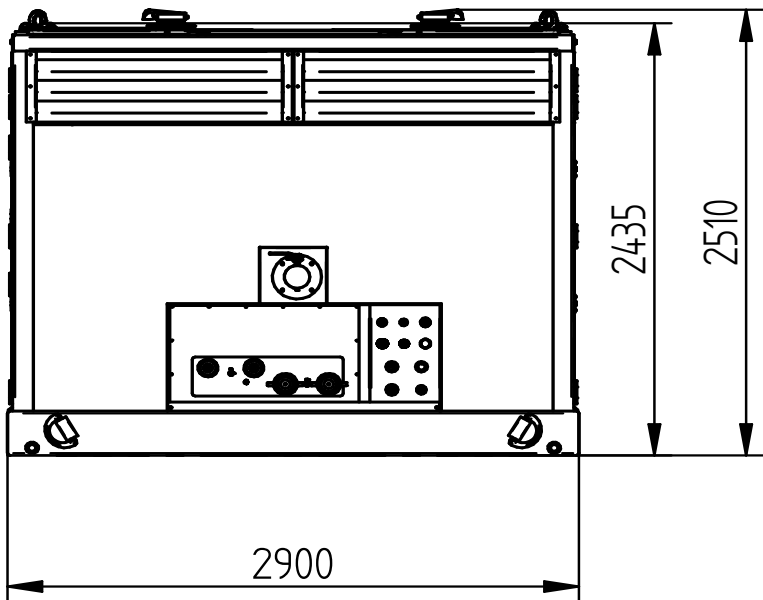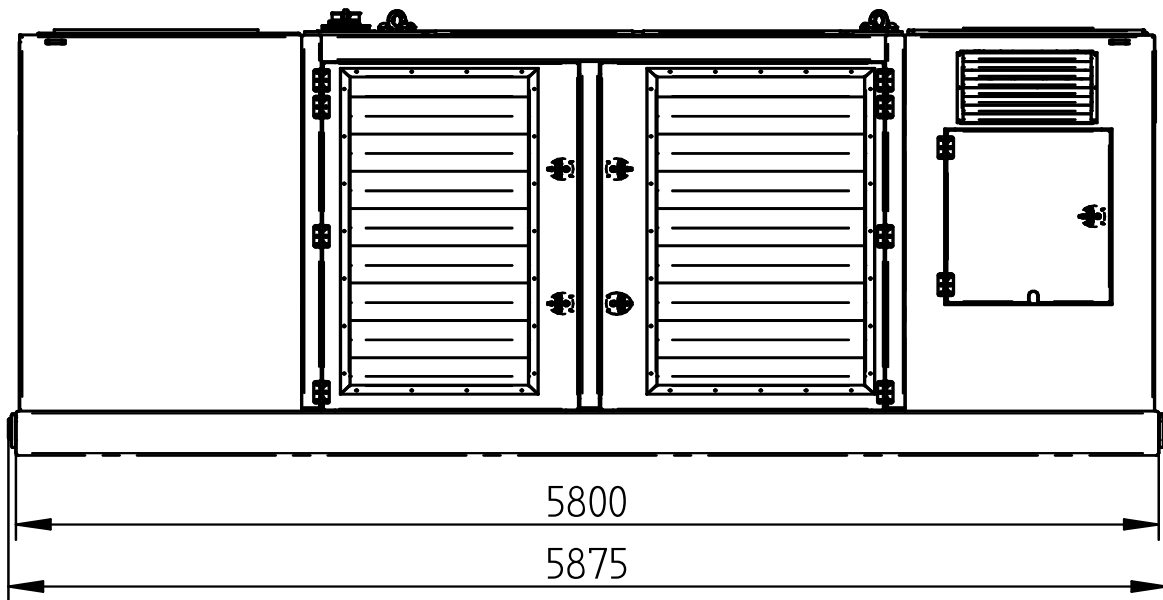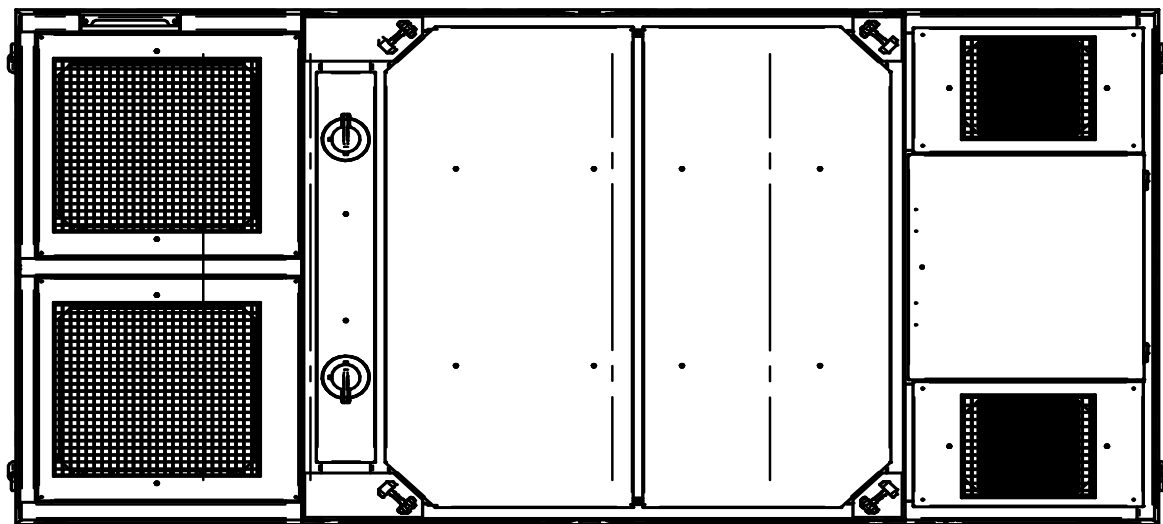

Specificatii :			ICE 1600 STAGE V / TIER 4F
Motor diesel	Volvo Penta TWD 1683 VE (2x)		
Puterea maxima teoretica	1170/1592		kW/HP
Frecventa maxima	1900		rpm
Presiune maxima de lucru	350		bar
Pompa hidraulica	Rexroth		
Debit maxim de ulei	1710		L/min
motorină	2130		L
Capacitate rezervor aditiv AdBlue	140		L
Ulei hidraulic	3300		L
Greutatea fara combustibil	17100		kg
Greutatea cu combustibil	18900		kg