





Specification sheet


PVE 38VMR

Vibro Hammer

English

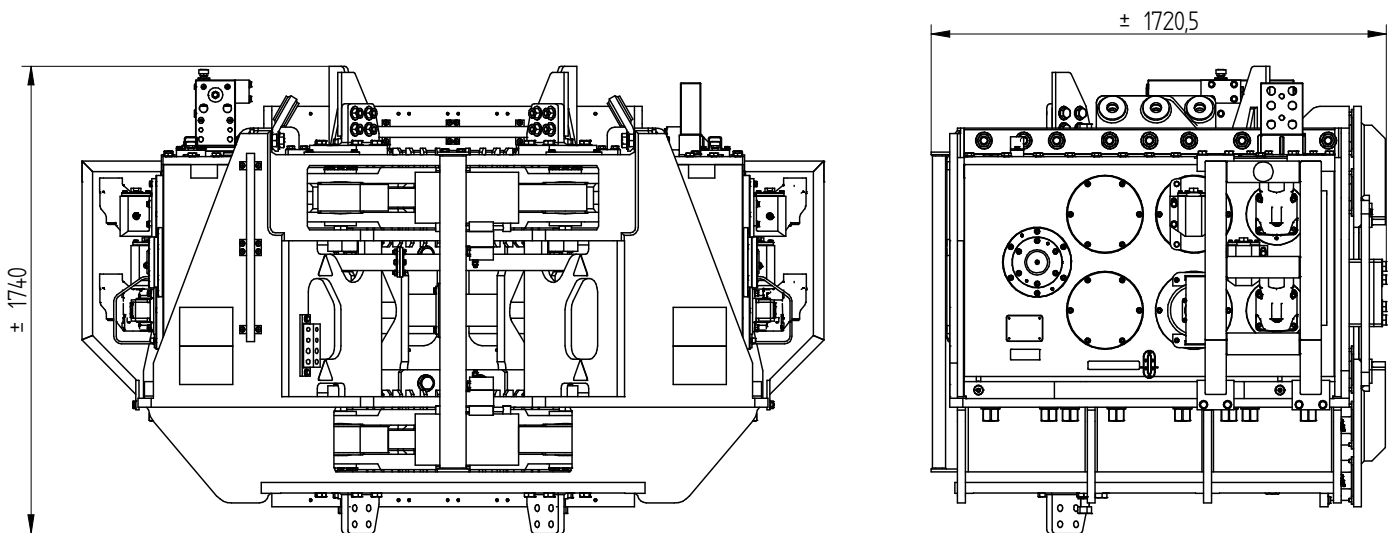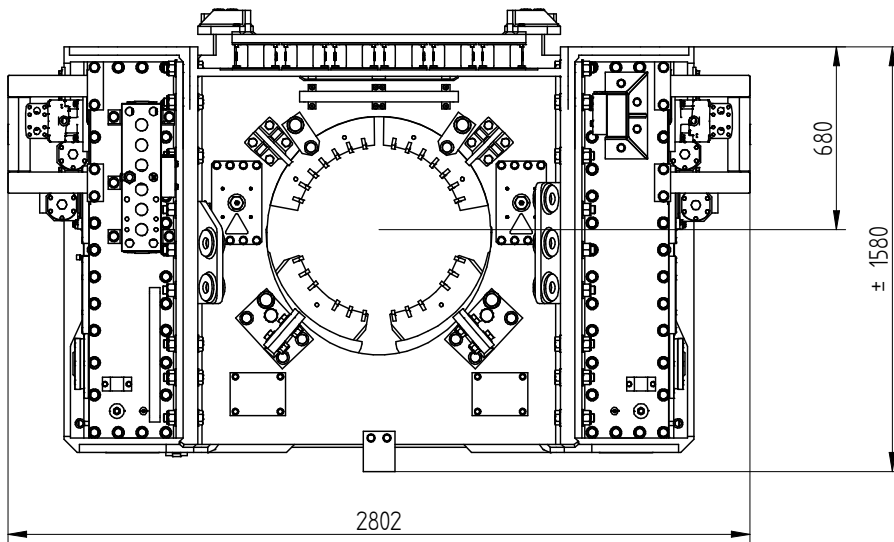**Specifications :****PVE 38VMR**


Eccentric moment	38 kgm	Clamps:	
Max. centrifugal force	2200 kN	Sheet pile clamp	N/A
Max. frequency	2300 rpm	Transport weight per piece	N/A kg
Max. amplitude	6 mm	Double clamps	N/A
Max. amplitude incl. clamp	N/A mm	Transport weight per piece	N/A kg
Max. static line-pull	400 kN	Powerpack:	
Max. operating pressure	350 bar	Model	1000 series
Max. oil flow	960 l/min	Hose set:	
Forced lubrication	yes	Length	N/A m
Dynamic weight	12400 kg	Transport weight (±)	N/A kg
Dynamic weight incl. clamp	N/A kg		
Total weight excl. hoses	12900 kg		

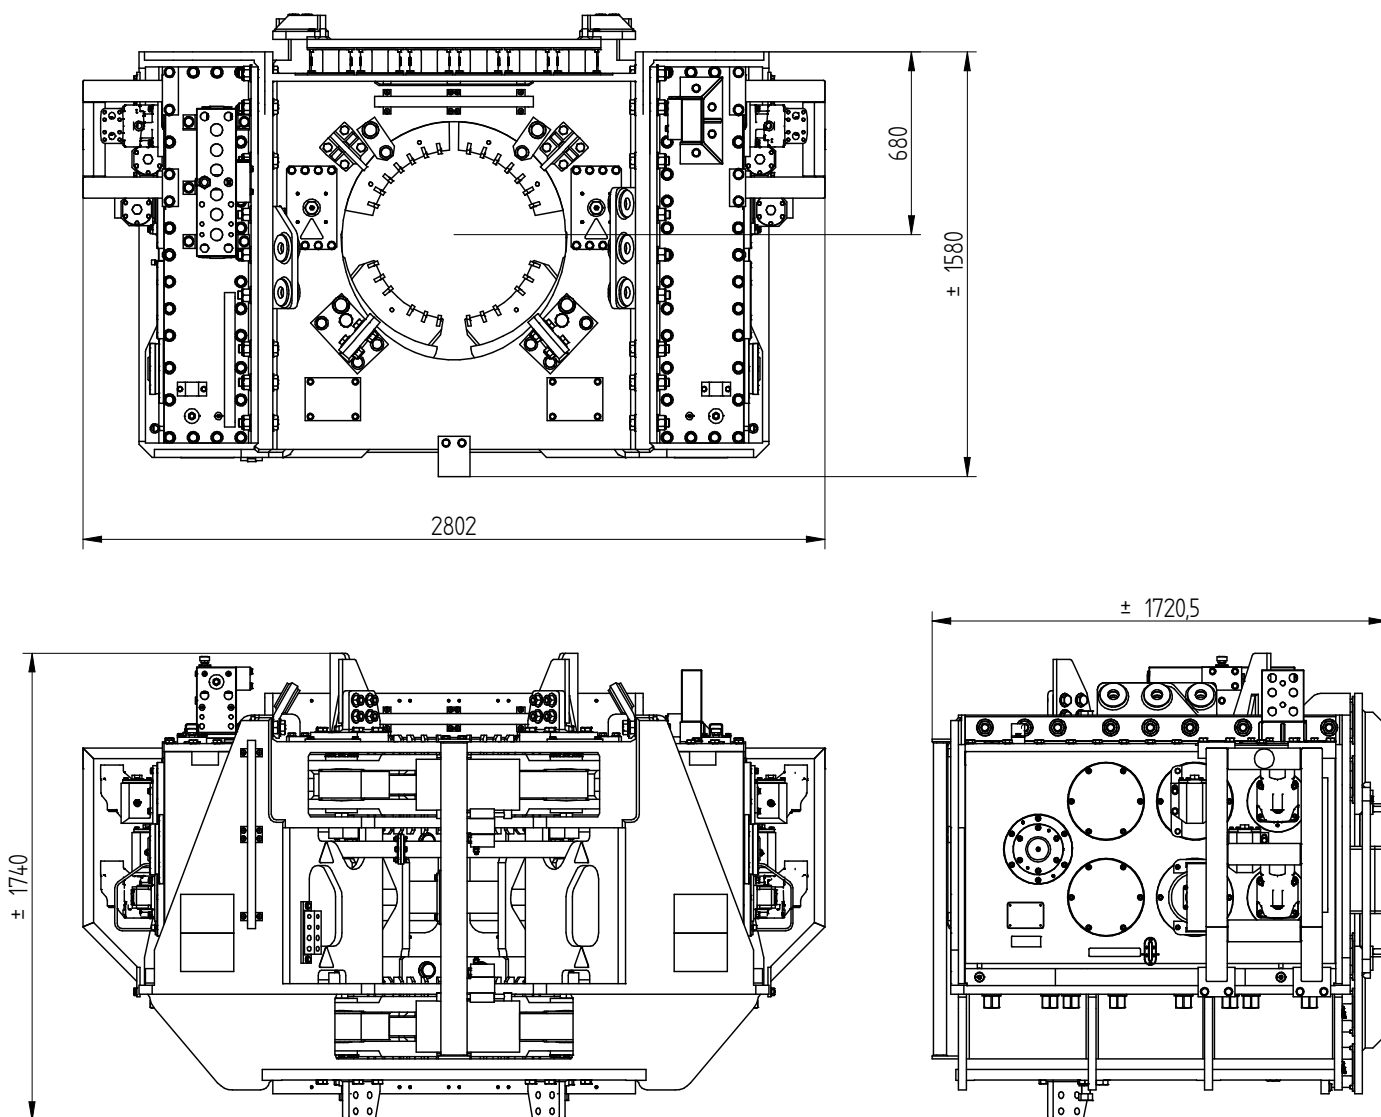


Technische Daten :

PVE 38VMR

Statisches Moment	38 kgm	Klemmzange:	
Max. Fliehkraft	2200 kN	Universalzange	N/A
Max. Drehzahl	2300 rpm	Transportgew. pro Stück	N/A kg
Max. Amplitude	6 mm	Rohrklemmzange	N/A
Max. Amplitude mit klemme	N/A mm	Transportgew. pro Stück	N/A kg
Max. Statische Zugkraft	400 kN	Aggregat:	
Max. Betriebsdruck	350 bar	Modell	1000 series
Max. Fördermenge	960 l/min	Schlauchsatz:	
Zwangsschmierung	ja	Länge	N/A m
Dyn. Gewicht	12400 kg	Transportgewicht (±)	N/A kg
Dyn. Gewicht mit klemme	N/A kg		
Gesamtgew. Ohne Schläuche	12900 kg		

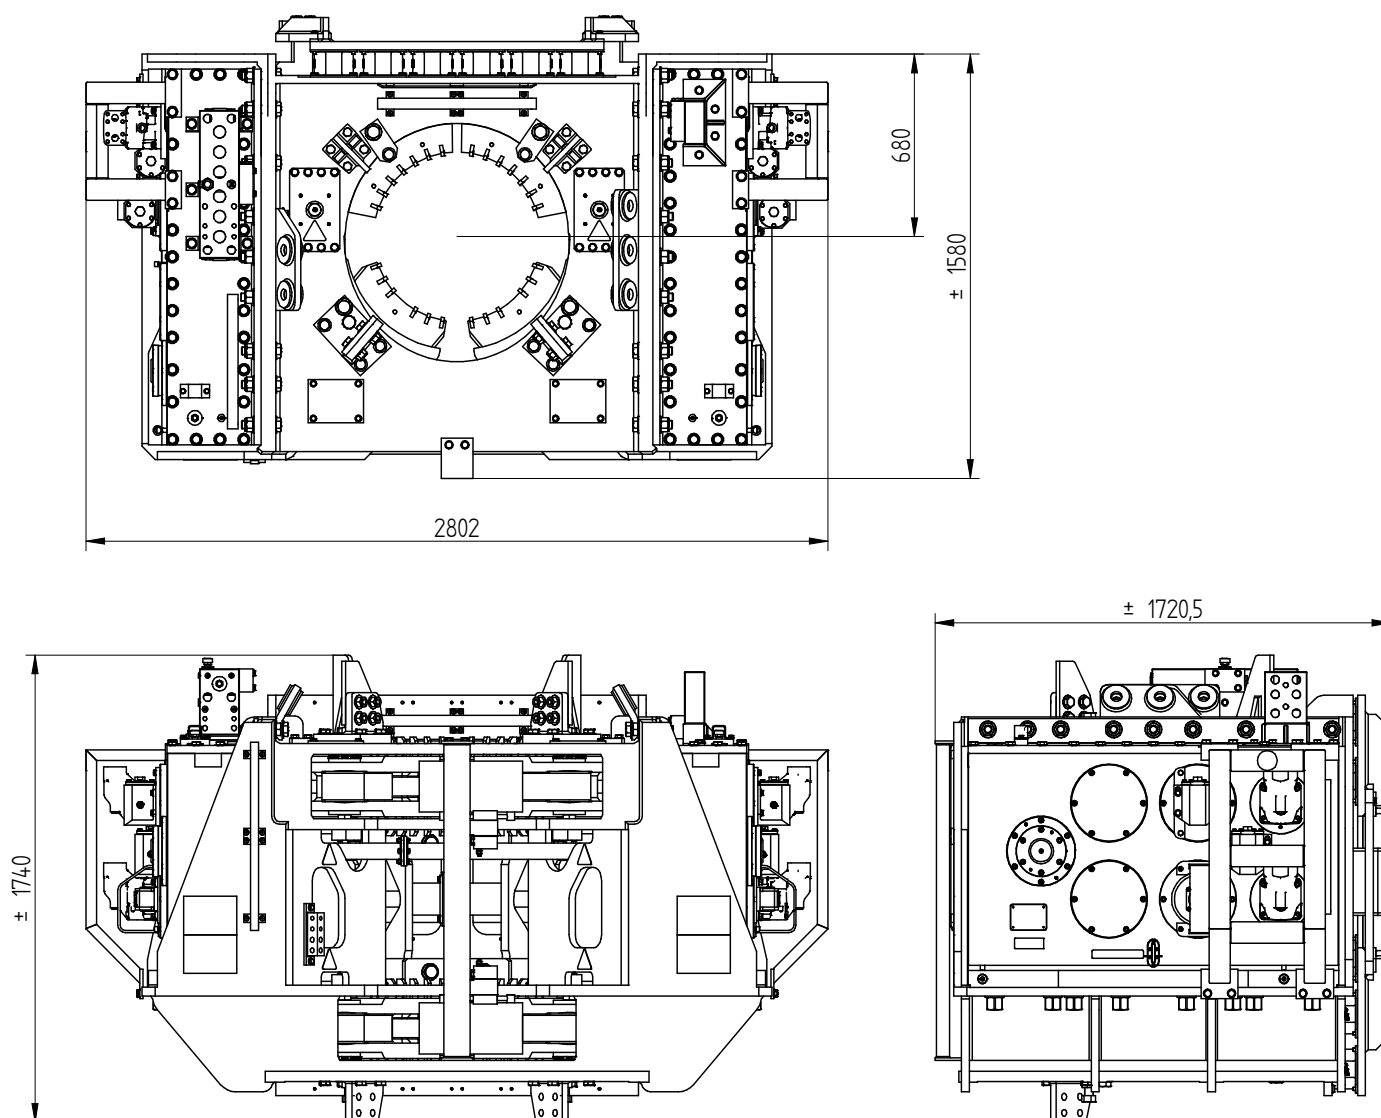**Spécifications****PVE 38VMR**

Moment excentrique	38 kgm	Pincés:	
Max. force centrifuge	2200 kN	Pince palplanche	N/A
Max. fréquence	2300 rpm	Poids de transport par pièce	N/A kg
Max. amplitude	6 mm	Pince tube	N/A
Max. amplitude avec pince	N/A mm	Poids de transport par pièce	N/A kg
Force de traction statique	400 kN	Groupe hydraulique:	
Pression de travail max.	350 bar	Modèle	1000 series
Débit d'huile max.	960 l/min	Jeu de tuyau:	
Huile lubrifiante	oui	Longueur	N/A m
Poids dynamique	12400 kg	Poids de transport (±)	N/A kg
Poids dynamique avec pince	N/A kg		
Poids total sans tuyaux	12900 kg		

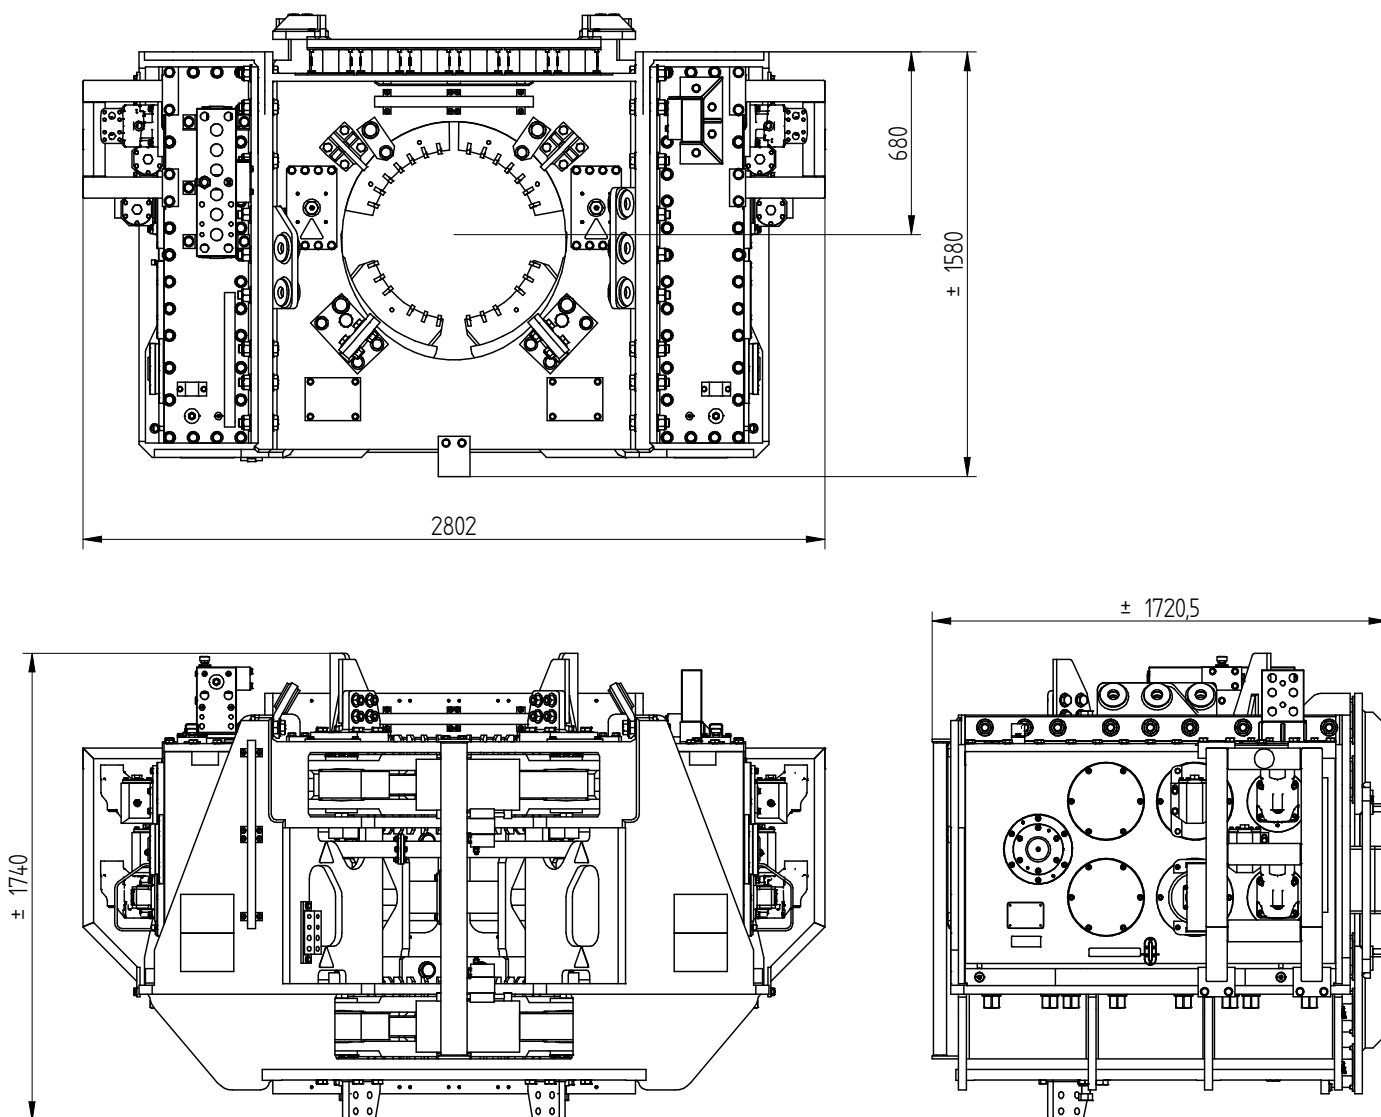**Specificaties****PVE 38VMR**

Excentrisch moment	38 kgm	Klemmen:	
Max. centrifugaalkracht	2200 kN	Damwandklem	N/A
Max. toerental	2300 rpm	Transportgewicht per klem	N/A kg
Max. amplitude	6 mm	Pijpenklem	N/A
Max. amplitude incl. klem	N/A mm	Transportgewicht per klem	N/A kg
Max. statische trekkracht	400 kN	Aggregaat:	
Max. werkdruk	350 bar	Model	1000 series
Max. oliedoorstroming	960 l/min	Slangenset:	
Geforceerde smering	ja	Lengte	N/A m
Dynamisch gewicht	12400 kg	Transportgewicht (±)	N/A kg
Dynamisch gewicht incl. klem	N/A kg		
Totaalgewicht excl. slangen	12900 kg		





Specificatii

PVE 38VMR

Ciocan vibrator

Español

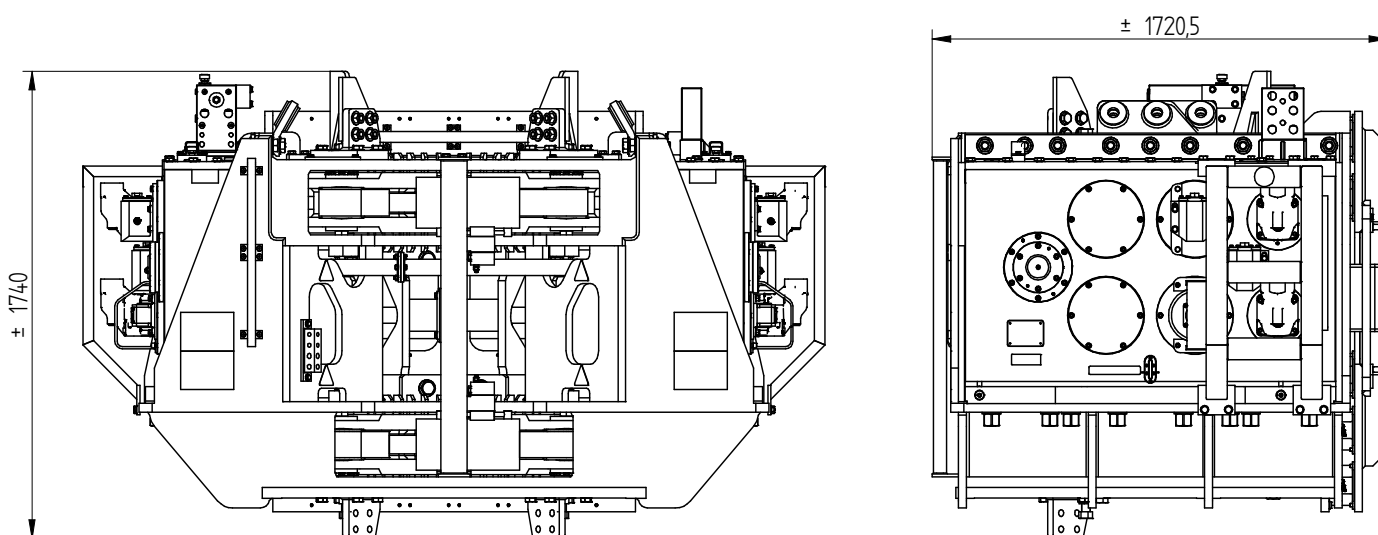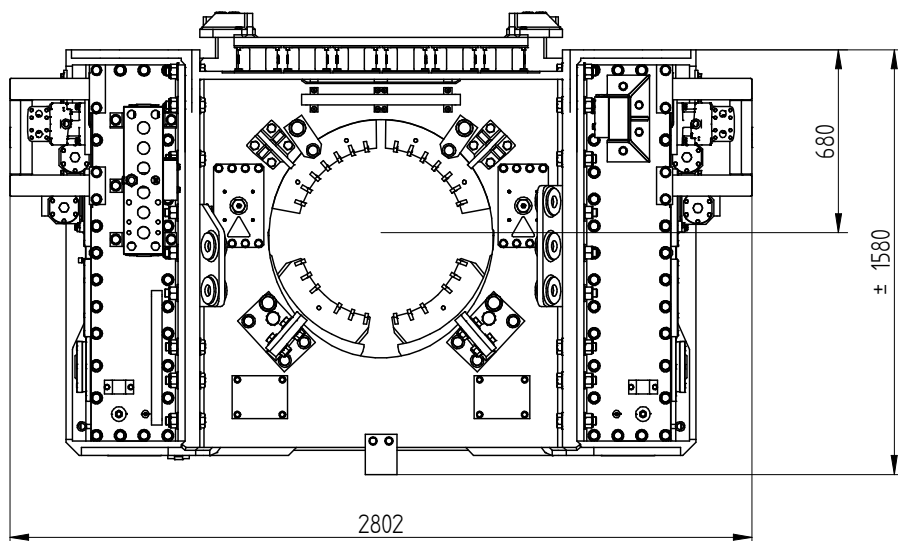

Specificatii

PVE 38VMR

Moment excentric	38 kgm	Menghina:	
Forta centrifuga maxima	2200 kN	Menghina pentru palplanse	N/A
Frecventa maxima	2300 rpm	Greutatea transportului pe buc.	N/A kg
Amplitudinea maxima	6 mm	Menghina dubla	N/A
Amplitudinea maxima inclusiv menghina	N/A mm	Greutatea transportului pe buc.	N/A kg
Tractiune statica maxima	400 kN	Unitate de putere:	
Presiunea maxima de lucru	350 bar	Model	1000 series
Debit maxim de ulei	960 l/min	Set furtun:	
Ungere fortata	da	Lungime	N/A m
Greutate dinamica	12400 kg	Greutatea transportului (±)	N/A kg
Greutate dinamica inclusiv menghina	N/A kg		
Greutate totala cu furtun atasat	12900 kg		




Specifications

PVE 38VMR

Vibro Hammer

USA

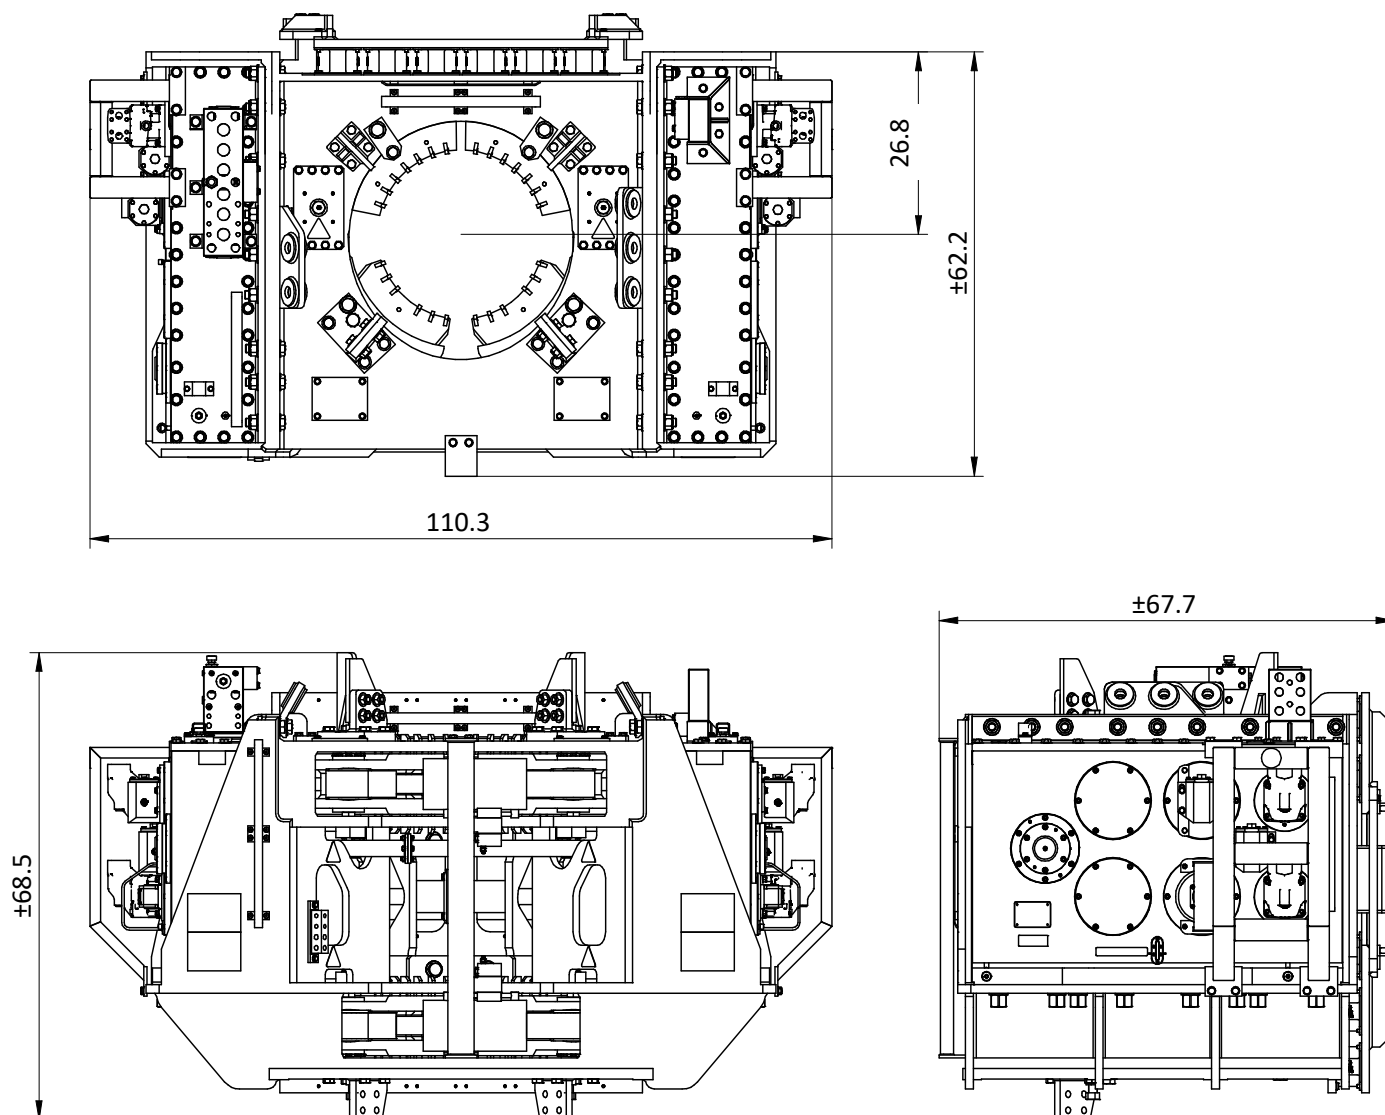

Specifications

PVE 38VMR

Eccentric moment	0-3298.6 lbs in	Clamps:	
Max. centrifugal force	0-247.3 US tn	Sheet pile clamp	N/A
Max. frequency	2300 rpm	Transport weight per piece	N/A lbs
Max. amplitude	0.24 in	Double clamps	N/A
Max. amplitude including clamp	N/A in	Transport weight per piece	N/A lbs
Max. static line-pull	40.8 US tn	Powerpack:	
Max. operating pressure	5076 psi	Model	1000 series
Max. oil flow	254 gal/min	Hose set:	
Forced lubrication	yes	Length	N/A ft
Dynamic weight	27337 lbs	Transport weight (±)	N/A lbs
Dynamic weight including clamp	N/A lbs		
Total weight excluding hoses	28440 lbs		