



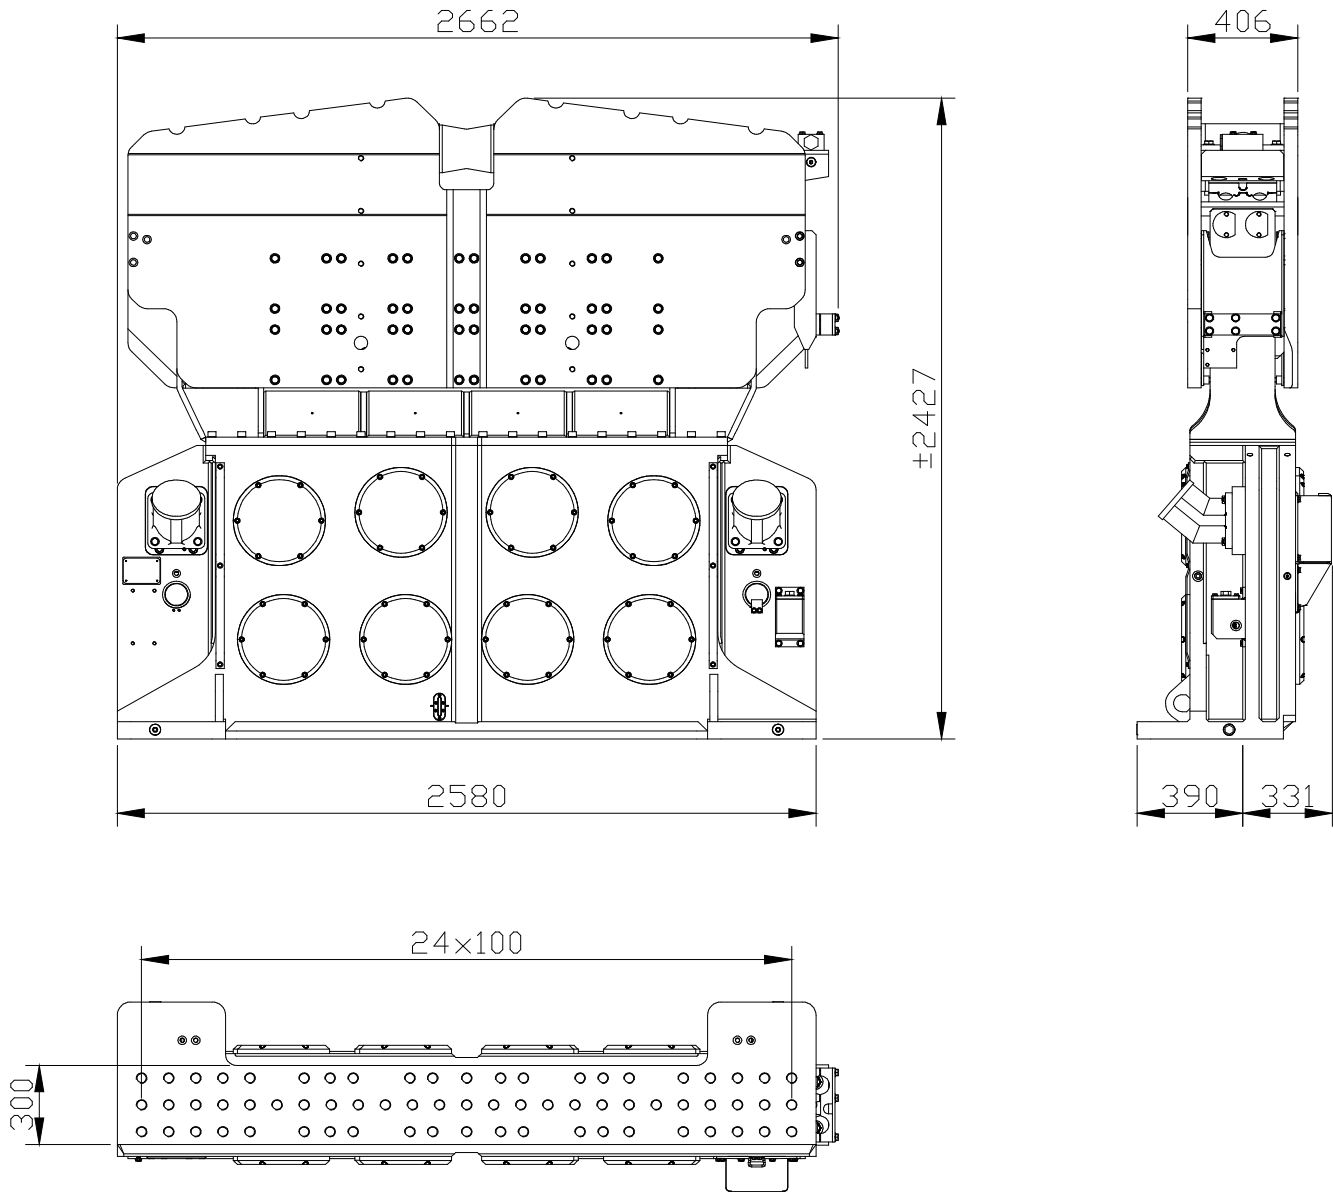

Specifications :

ICE 82NF


Eccentric moment	81 kgm	Clamps:	
Max. centrifugal force	2567 kN	Sheet pile clamp	320TU
Max. frequency	1700 rpm	Transport weight per piece	2500 kg
Max. amplitude excl. 320TU	30 mm	Double clamps	200TC
Max. amplitude incl. 320TU	20.5 mm	Transport weight per piece	1350 kg
Max. static line-pull	800 kN		
Max. operating pressure	350 bar	Powerpack:	
Max. oil flow	888 l/min	Model	900 series
Forced lubrication	yes		
Dynamic weight excl. 320TU	5400 kg	Hose set:	
Dynamic weight incl. 320TU	7900 kg	Length	45 m
Total weight excl. 320TU & hoses	7900 kg	Transport weight (±)	1100 kg

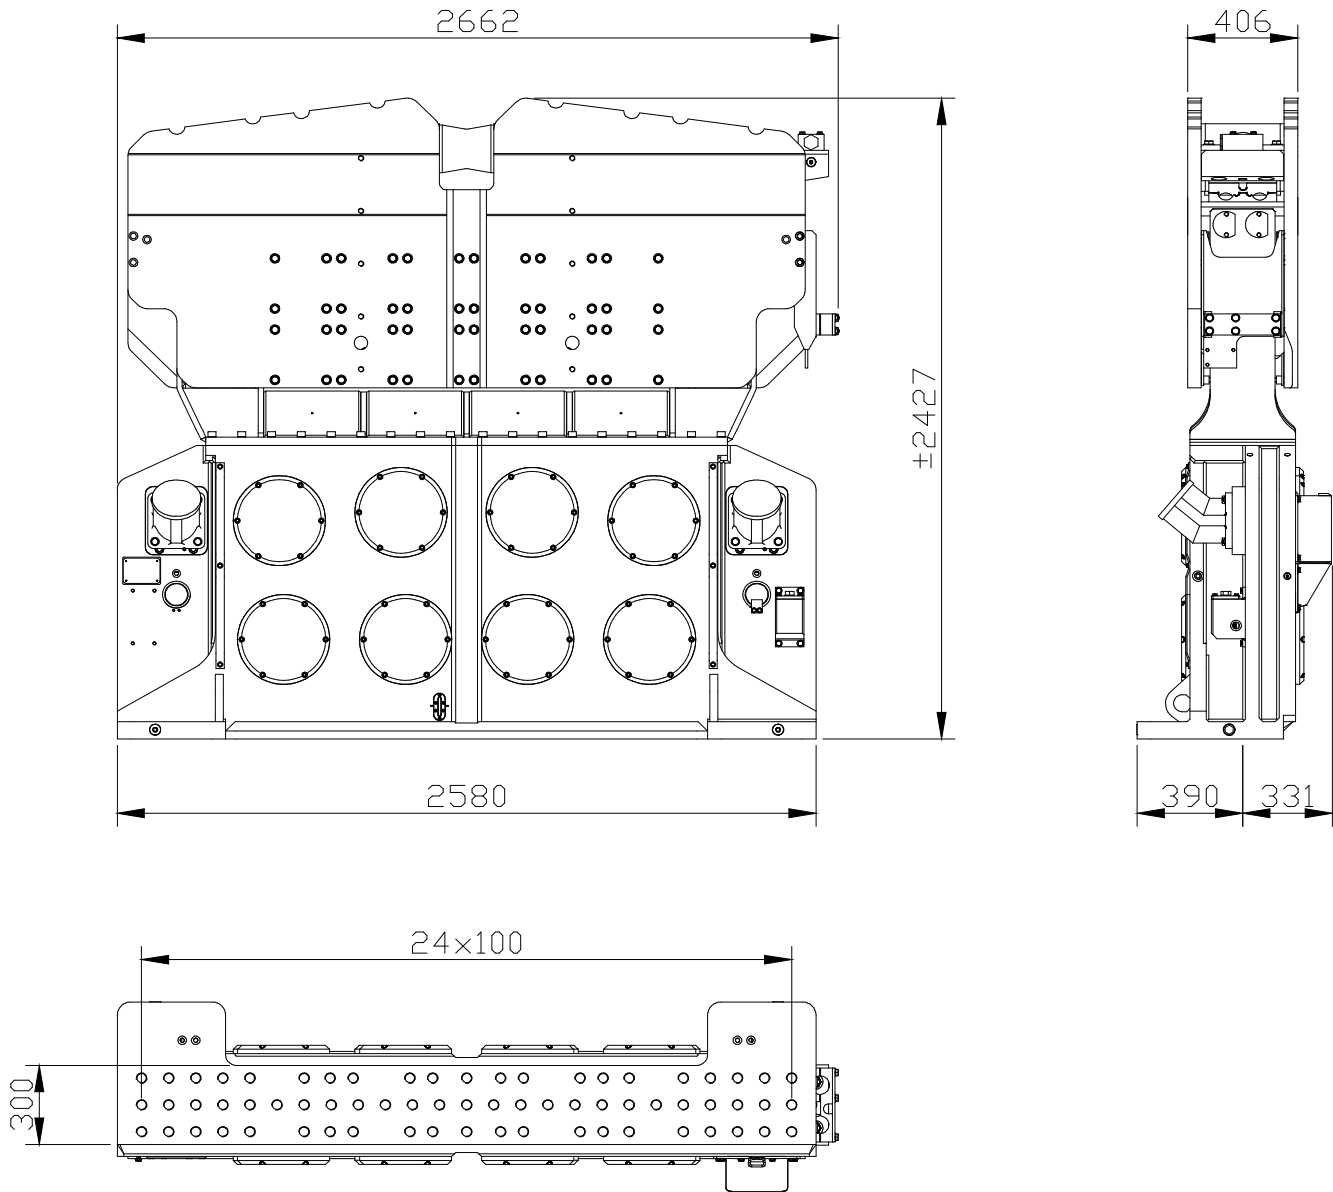

Technische Daten :

ICE 82NF


Statisches Moment	81 kgm	Klemmzange:	
Max. Fliehkraft	2567 kN	Universalzange	320TU
Max. Drehzahl	1700 rpm	Transportgew. pro Stück	2500 kg
Max. Amplitude ohne 320TU	30 mm	Rohrklemmzange	200TC
Max. Amplitude mit 320TU	20.5 mm	Transportgew. pro Stück	1350 kg
Max. Statische Zugkraft	800 kN		
Max. Betriebsdruck	350 bar	Aggregat:	
Max. Fördermenge	888 l/min	Modell	900 series
Zwangsschmierung	ja		
Dyn. Gewicht ohne 100TU	5400 kg	Schlauchsatz:	
Dyn. Gewicht mit 100TU	7900 kg	Länge	45 m
Gesamtgew. ohne 100TU & Schläuche	7900 kg	Transportgewicht (±)	1100 kg

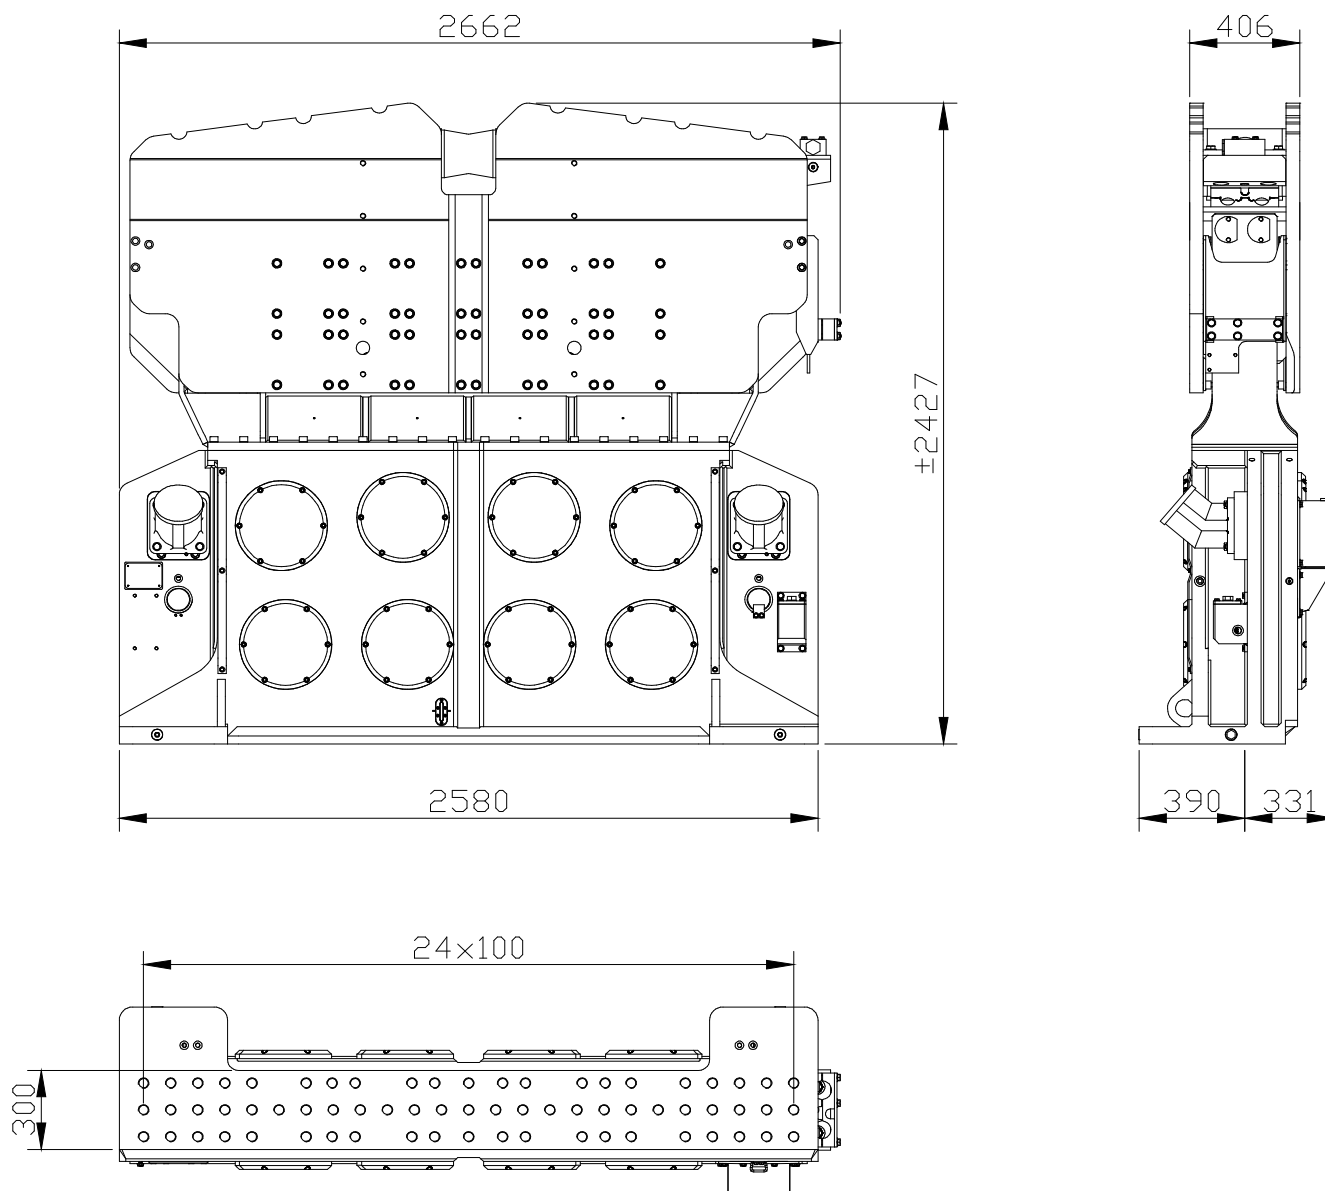


Spécifications

ICE 82NF


Moment excentrique	81 kgm	Pincés:	
Max. force centrifuge	2567 kN	Pince palplanche	320TU
Max. fréquence	1700 rpm	Poids de transport par pièce	2500 kg
Max. amplitude sans 100TU	30 mm	Pince tube	200TC
Max. amplitude avec 100TU	20.5 mm	Poids de transport par pièce	1350 kg
Force de traction statique	800 kN		
Pression de travail max.	350 bar	Groupe hydraulique:	
Débit d'huile max.	888 l/min	Modèle	900 series
Huile lubrifiante	oui		
Poids dynamique sans 100TU	5400 kg	Jeu de tuyau:	
Poids dynamique avec 100TU	7900 kg	Longueur	45 m
Poids total sans 100TU & tuyaux	7900 kg	Poids de transport (±)	1100 kg

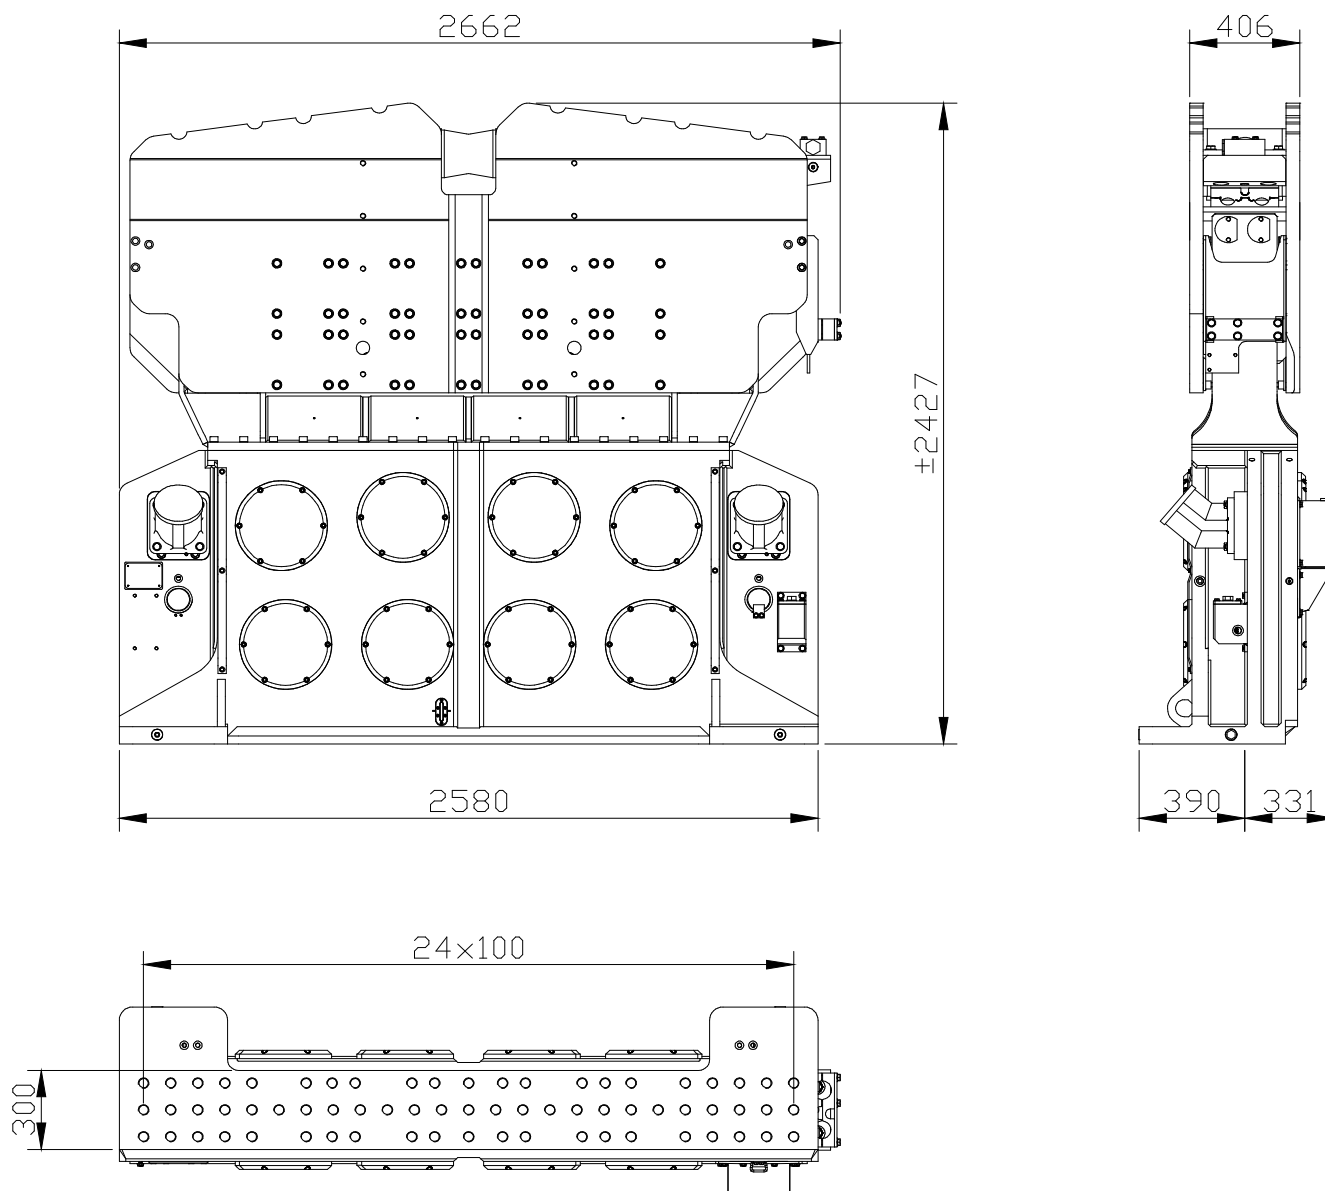
Specificaties
ICE 82NF

Excentrisch moment	81 kgm	Klemmen:	
Max. centrifugaalkracht	2567 kN	Damwandklem	320TU
Max. toerental	1700 rpm	Transportgewicht per klem	2500 kg
Max. amplitude excl. 100TU	30 mm	Pijpenklem	200TC
Max. amplitude incl. 100TU	20.5 mm	Transportgewicht per klem	1350 kg
Max. statische trekkracht	800 kN		
Max. werkdruk	350 bar	Aggregaat:	
Max. oliedoorstroming	888 l/min	Model	900 series
Geforceerde smering	ja		
Dynamisch gewicht excl. 100TU	5400 kg	Slangenset:	
Dynamisch gewicht incl. 100TU	7900 kg	Lengte	45 m
Totaalgewicht excl. 100TU & slangen	7900 kg	Transportgewicht (±)	1100 kg

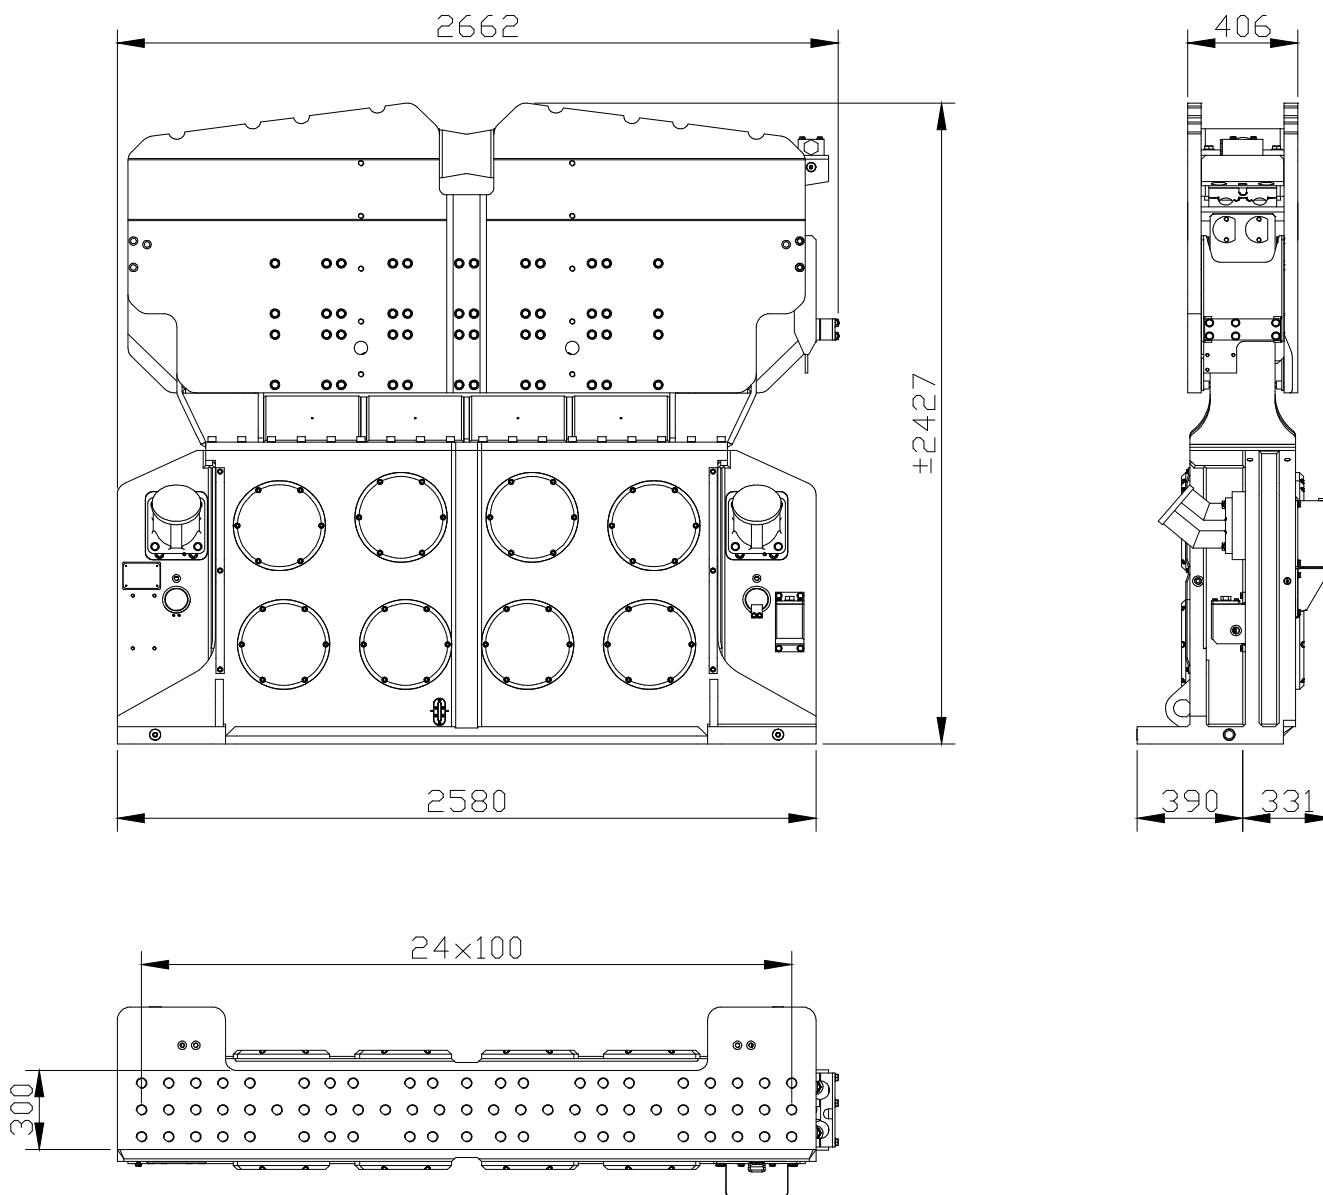
Specificatii
ICE 82NF

Moment excentric	81 kgm	Menghina:	
Fora centrifuga maxima	2567 kN	Menghina pentru palplanse	320TU
Frecventa maxima	1700 rpm	Greutatea transportului pe buc.	2500 kg
Amplitudinea maxima excluzand 100TU	30 mm	Menghina dubla	200TC
Amplitudinea maxima inclusiv 100TU	20.5 mm	Greutatea transportului pe buc.	1350 kg
Tractiune statica maxima	800 kN	Unitate de putere:	
Presiunea maxima de lucru	350 bar	Model	900 series
Debit maxim de ulei	888 l/min	Set furtun:	
Ungere fortata	da	Lungime	45m
Greutate dinamica excluzand 100TU	5400 kg	Greutatea transportului (±)	1100 kg
Greutate dinamica inclusiv 100TU	7900 kg		
Greutate totala excl. 100TU & furtunuri	7900 kg		

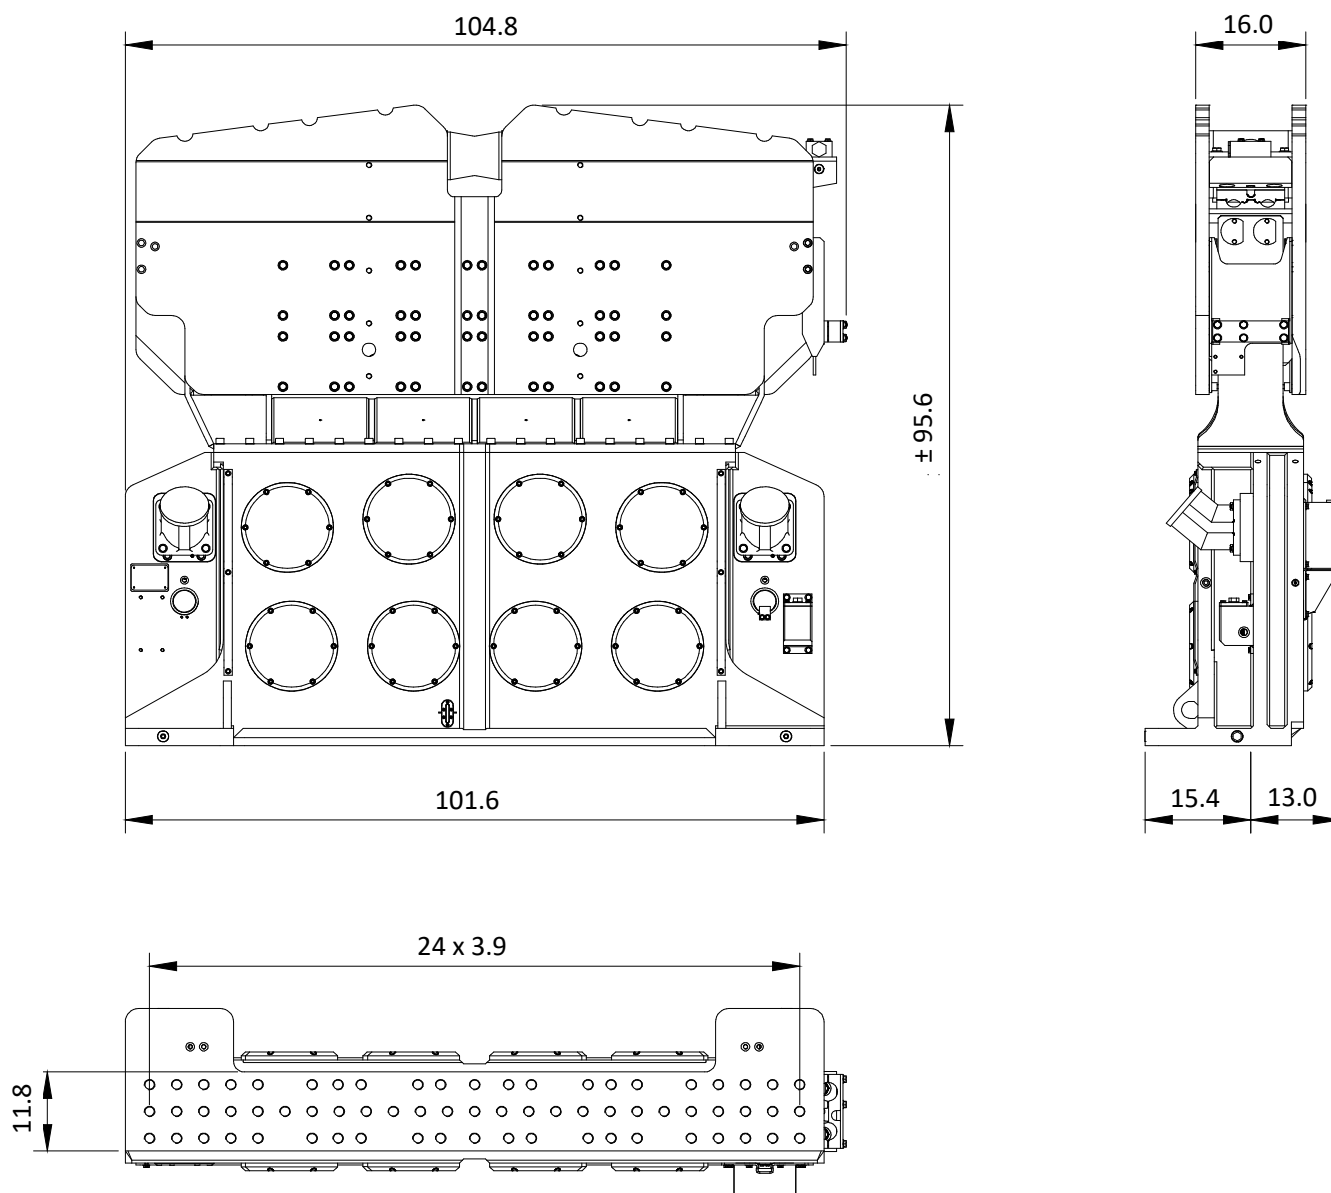

Specifications		ICE 82NF	
Eccentric moment	0-7031.3 lbs in	Clamps:	
Max. centrifugal force	0-288.6 US tn	Sheet pile clamp	320TU
Max. frequency	1700 rpm	Transport weight per piece	5512 lbs
Max. amplitude excluding 100TU	1.18 in	Double clamps	200TC
Max. amplitude including 100TU	0.81 in	Transport weight per piece	2976 lbs
Max. static line-pull	81.6 US tn	Powerpack:	
Max. operating pressure	5076 psi	Model	900 series
Max. oil flow	235 gal/min	Hose set:	
Forced lubrication	yes	Length	148 ft
Dynamic weight excluding 100TU	11905 lbs	Transport weight (±)	2425 lbs
Dynamic weight including 100TU	17417 lbs		
Total weight excluding 100TU & hoses	17417 lbs		